

2019 GAME MANUAL

FIRST® Robotics
Competition

DESTINATION:
**DEEP
SPACE**



Presented By



www.firstinspires.org

200 BEDFORD STREET ■ MANCHESTER, NH 03101



FOR INSPIRATION & RECOGNITION OF SCIENCE & TECHNOLOGY

CONTENTS

1	Introduction.....	1
1.1	About <i>FIRST</i> [®]	1
1.2	<i>FIRST</i> Robotics Competition.....	1
1.3	<i>Gracious Professionalism</i> [®] , a <i>FIRST</i> [®] Credo.....	1
1.4	<i>Coopertition</i> [®]	3
1.5	This Document & Its Conventions.....	4
1.6	Translations & Other Versions.....	5
1.7	Team Updates.....	5
1.8	Question and Answer System.....	5
2	2019 Game Overview.....	7
3	Season Sponsor Recognition.....	9
4	ARENA.....	10
4.1	FIELD.....	10
4.2	Zones and Markings.....	12
4.3	ROCKET.....	17
4.4	CARGO SHIP.....	19
4.5	HAB PLATFORM.....	23
4.6	DEPOT.....	24
4.7	SANDSTORM.....	24
4.8	ALLIANCE STATION.....	25
4.8.1	ALLIANCE WALL.....	25
4.8.2	GAME PIECE Holders.....	28
4.9	GAME PIECES.....	29
4.9.1	CARGO.....	29
4.9.2	HATCH PANEL.....	30
4.10	Vision Targets.....	30
4.11	The FIELD Management System.....	31
5	MATCH Play.....	35
5.1	Setup.....	35
5.1.1	GAME PIECES.....	35
5.1.2	ROBOTS.....	36
5.1.3	Humans.....	37
5.2	SANDSTORM PERIOD.....	37
5.3	Scoring.....	37





- 5.4 Rule Violations 38
- 5.5 DRIVE TEAM 39
- 5.6 Other Logistics 40
- 6 Safety Rules 43
- 7 Conduct Rules..... 45
- 8 Game Rules: ROBOTS 49
 - 8.1 Before/After the MATCH 49
 - 8.2 During the MATCH..... 49
 - 8.2.1 Only During the SANDSTORM PERIOD 49
 - 8.2.2 GAME PIECE Interaction 49
 - 8.2.3 Zone Specific Restrictions..... 50
 - 8.2.4 FIELD Interaction 52
 - 8.2.5 ROBOT to ROBOT Interaction..... 53
 - 8.2.6 ROBOT Restrictions..... 54
- 9 Game Rules: Humans 57
 - 9.1 Before the MATCH..... 57
 - 9.2 During the MATCH..... 58
 - 9.2.1 Only During the SANDSTORM PERIOD 58
 - 9.3 In the ARENA..... 59
- 10 ROBOT Construction Rules 61
 - 10.1 Overview 61
 - 10.2 General ROBOT Design 63
 - 10.3 ROBOT Safety & Damage Prevention 65
 - 10.4 Budget Constraints & Fabrication Schedule 66
 - 10.5 BUMPER Rules..... 72
 - 10.6 Motors & Actuators..... 79
 - 10.7 Power Distribution 81
 - 10.8 Control, Command & Signals System..... 87
 - 10.9 Pneumatic System 91
 - 10.10 OPERATOR CONSOLE 94
- 11 Inspection & Eligibility Rules 97
- 12 Tournaments 101
 - 12.1 MATCH Schedules..... 101
 - 12.2 REFEREE Interaction 101
 - 12.2.1 YELLOW and RED CARDS 102



12.3	MATCH Replays	103
12.4	Measurement	104
12.5	Practice MATCHES.....	104
12.5.1	Filler Line	104
12.6	Qualification MATCHES.....	104
12.6.1	Schedule	104
12.6.2	MATCH Assignment.....	105
12.6.3	Qualification Ranking	105
12.7	Playoff MATCHES.....	106
12.7.1	ALLIANCE Selection Process	106
12.7.2	Playoff MATCH Bracket	107
12.7.3	Pit Crews	109
12.7.4	TIMEOUTS.....	109
12.7.5	BACKUP TEAMS	110
12.8	Advancement Through the District Model.....	112
12.8.1	District Events	112
12.8.2	District Championship Eligibility	115
12.8.3	District Championships with Multiple Divisions	115
12.9	Advancement to the <i>FIRST</i> Championship.....	117
12.9.1	Wild Cards.....	117
12.9.2	<i>FIRST</i> Championship Eligibility for District Teams	118
12.10	<i>FIRST</i> Championship: Additions and Exceptions	121
12.10.1	Four ROBOT ALLIANCES	121
12.10.2	<i>FIRST</i> Championship Pit Crews	122
12.10.3	<i>FIRST</i> Championship Playoffs	122
12.10.4	<i>FIRST</i> Championship TIMEOUTS	123
13	Glossary	125

1 INTRODUCTION

1.1 ABOUT FIRST®

FIRST® (For Inspiration and Recognition of Science and Technology) was founded by inventor Dean Kamen to inspire young people's interest in science and technology. Based in Manchester, New Hampshire, *FIRST* is a 501(c)(3) not-for-profit public charity.

FIRST provides four programs:

- *FIRST*® Robotics Competition for grades 9-12, ages 14-18
- *FIRST*® Tech Challenge for grades 7-12, ages 12-18
- *FIRST*® LEGO® League for grades 4-8, ages 9-14 (ages 9-16 outside of North America)
- *FIRST*® LEGO® League Jr. for grades K-4, ages 6-10

Please visit our website: www.firstinspires.org for more information about *FIRST* programs.

1.2 FIRST ROBOTICS COMPETITION

FIRST Robotics Competition pairs high school students with adult mentors (primarily engineers and teachers) to design and build robots that compete against one another in a high-energy environment.

This varsity Sport for the Mind™ combines the excitement of sport with the rigors of science and technology. Under strict rules, limited resources and time limits, teams of students are challenged to raise funds, design a team "brand," hone teamwork skills, and build and program ROBOTS to perform prescribed tasks against a field of competitors. It's as close to "real-world" engineering as a student can get.

Each January at an event known as "Kickoff," a new, challenging game is introduced. These exciting competitions combine the practical application of science and technology with the fun, intense energy and excitement of a championship-style sporting event. Teams are encouraged to display *Gracious Professionalism*®, help other teams, and cooperate while competing. This is known as *Coopertition*®.

In 2019, *FIRST* Robotics Competition will reach 95,000 high-school students representing more than 3,900 teams. Teams come from nearly every state in the United States, as well as many other countries.

FIRST Robotics Competition teams will participate in 60 Regional Competitions, 99 District Competitions, and 11 District Championships. In addition, approximately 800 teams will qualify to go to one of the two *FIRST* Championship events at the end of April 2019.

This year's game, and this manual, were presented at the 2019 *FIRST* Robotics Competition Kickoff on Saturday, January 5, 2019.

At the Kickoff, all teams:

- saw the 2019 game, DESTINATION: DEEP SPACE Presented By The Boeing Company, for the first time
- learned about the 2019 game rules and regulations
- received a Kickoff Kit that provides a starting point for robot build

1.3 GRACIOUS PROFESSIONALISM®, A FIRST® CREDO

Gracious Professionalism® is part of the ethos of *FIRST*. It's a way of doing things that encourages high quality work, emphasizes the value of others, and respects individuals and the community.



Gracious Professionalism is not clearly defined for a reason. It can and should mean different things to everyone.

Some possible meanings of *Gracious Professionalism* include:

- Gracious attitudes and behaviors are win-win
- Gracious folks respect others and let that respect show in their actions
- Professionals possess special knowledge and are trusted by society to use that knowledge responsibly
- Gracious Professionals make a valued contribution in a manner pleasing to others and to themselves

In the context of *FIRST*, this means that all teams and participants should:

- Learn to be strong competitors, but also treat one another with respect and kindness in the process
- Avoid leaving anyone feeling as if they are excluded or unappreciated

Knowledge, pride and empathy should be comfortably and genuinely blended.

In the end, *Gracious Professionalism* is part of pursuing a meaningful life. When professionals use knowledge in a gracious manner and individuals act with integrity and sensitivity, everyone wins and society benefits.



The FIRST spirit encourages doing high-quality, well-informed work in a manner that leaves everyone feeling valued. Gracious Professionalism seems to be a good descriptor for part of the ethos of FIRST. It is part of what makes FIRST different and wonderful.

- Dr. Woodie Flowers, National Advisor for FIRST

It is a good idea to spend time going over this concept with your team and reinforcing it regularly. We recommend providing your team with real-life examples of *Gracious Professionalism* in practice, such as when a team loans valuable materials or expertise to another team that they will later face as an opponent in competition. Routinely highlight opportunities to display *Gracious Professionalism* at events and encourage team members to suggest ways in which they can demonstrate this quality themselves and through outreach activities.



1.4 COOPERTITION®

At FIRST, Coopertition® is displaying unqualified kindness and respect in the face of fierce competition. Coopertition is founded on the concept and philosophy that teams can and should help and cooperate with one another even as they compete. Coopertition involves learning from teammates and mentors. Coopertition means competing always but assisting and enabling others when you can.

A Message from Woodie Flowers Award Recipients

The Woodie Flowers Award is the most prestigious mentoring award in FIRST. The award recipients as of the 2015 FIRST Championship created an important message for all FIRST Robotics Competition teams to consider as we tackle each season.

Performing at your best is important. Winning is important. This is a competition.

However, winning the right way and being proud of what you have accomplished and how you have accomplished it is more important. FIRST could create rules and penalties to cover almost any scenario or situation, but we prefer an understandable game with simpler rules that allow us to think and be creative in our designs.

We want to know that our partners and opponents are playing at their best in every match. We want to know they are playing with integrity and not using strategies based on questionable behaviors.

As you create your robots and award presentations, prepare for competition and match play, create and implement game strategies, and live your daily lives, remember what Woodie has said time and time again, and let's 'Make your Grandmother proud.'

<i>Woodie Flowers</i>	<i>Dave Kelso (131)</i>	<i>Earl Scime (2614)</i>
<i>Liz Calef (88)</i>	<i>Paul Copioli (3310, 217)</i>	<i>Fredi Lajvardi (842)</i>
<i>Mike Bastoni (23)</i>	<i>Rob Mainieri (2735, 812, 64)</i>	<i>Lane Matheson (932)</i>
<i>Ken Patton (51, 65)</i>	<i>Dan Green (111)</i>	<i>Mark Lawrence (1816)</i>
<i>Kyle Hughes (27)</i>	<i>Mark Breadner (188)</i>	<i>Eric Stokely (258, 360, 2557, & 5295)</i>
<i>Bill Beatty (71)</i>	<i>John Novak (16, 323)</i>	<i>Glenn Lee (359)</i>
<i>Dave Verbrugge (5110, 67)</i>	<i>Chris Fultz (234)</i>	<i>Gail Drake (1885)</i>
<i>Andy Baker (3940, 45)</i>	<i>John Larock (365)</i>	



1.5 THIS DOCUMENT & ITS CONVENTIONS

The *2019 Game and Season Manual* is a resource for all *FIRST* Robotics Competition teams for information specific to the 2019 season and the DESTINATION: DEEP SPACE game. Its audience will find the following detail:

- a general overview of the DESTINATION: DEEP SPACE game
- detail about the DESTINATION: DEEP SPACE playing field
- description of how to play the DESTINATION: DEEP SPACE game
- all season rules (e.g. safety, conduct, game play, inspection, etc.)
- description of how teams advance at 2019 tournaments and throughout the season

All participants should study the [Event Rules Manual](#) as it details event rules and expectations that perpetuate from season to season. That page complements, and carries the same weight as, this document.

The intent of this manual is that the text means exactly, and only, what it says. Please avoid interpreting the text based on assumptions about intent, implementation of past rules, or how a situation might be in “real life.” There are no hidden requirements or restrictions. If you’ve read everything, you know everything.

Specific methods are used throughout this section to highlight warnings, cautions, key words and phrases. These conventions are used to alert the reader to important information and are intended help teams in constructing a robot that complies with the rules in a safe manner.

Links to other section headings in this manual and external articles appear in [blue underlined text](#).

Key words that have a particular meaning within the context of the *FIRST* Robotics Competition and DESTINATION: DEEP SPACE are defined in the [Glossary](#) section and indicated in ALL CAPS throughout this document.

The rule numbering scheme uses an indication of the section in which the rule is stated plus a serial numbering system (e.g. safety rules begin with “S,” game rules begin with “G,” etc.). References to specific rules use this scheme (e.g. “S1” is the [Safety Rules](#) section).

Warnings, cautions and notes appear in blue boxes. Pay close attention to their contents as they’re intended to provide insight into the reasoning behind a rule, helpful information on understanding or interpreting a rule, and/or possible “best practices” for use when implementing systems affected by a rule.

While blue boxes are part of the manual, they do not carry the weight of the actual rule (if there is an inadvertent conflict between a rule and its blue box, the rule supersedes the language in the blue box).

With the exception of nominal dimensions, imperial dimensions are followed by comparable metric dimensions in parentheses to provide metric users with the approximate size, weight, etc. Metric conversions for non-rules (e.g. FIELD dimensions) round to the nearest whole unit e.g. “17 in. (~43 cm)” and “6 ft. 4 in. (~193 cm).” Metric conversions in rules round such that the metric dimension is compliant with the rule (i.e. maximums round down, minimums round up). The metric conversions are offered for convenient reference only and do not overrule or take the place of the imperial dimensions presented in this manual and the field drawings (i.e. field dimensions and rules will always defer to measurements using imperial units).



Some sections and rules include colloquial language, also called headlines, in an effort to convey an abbreviated intent of the rule or rule set. This language is differentiated using **bold orange text**. Any disagreement between the specific language used in the rules and the colloquial language is an error, and the specific rule language is the ultimate authority. If you discover a disparity, please [let us know](#) and we will correct it.

Match timing is indicated using “T-minus” nomenclature. For example, T-minus 150s is the start of the 2-minute 30-second match and T-minus 0s is the end of the match.

Team resources that aren’t generally season specific (e.g. what to expect at an event, communication resources, team organization recommendations, robot transportation procedures, and award descriptions) can be found on the [FIRST Robotics Competition website](#).

1.6 TRANSLATIONS & OTHER VERSIONS

The DESTINATION: DEEP SPACE manual is originally and officially written in English and is occasionally translated into other languages for the benefit of FIRST Robotics Competition teams whose native language may not be English.

A text-based English version can be provided only for use with assistive devices for visually and hearing-impaired persons, and not for redistribution. For more information, please contact frcteamadvocate@firstinspires.org.

In the event that a rule or description is modified in an alternate version of this manual, the English pdf version as published on the [FIRST Game and Season Materials webpage](#) is the commanding version.

1.7 TEAM UPDATES

Team updates are used to notify the FIRST Robotics Competition community of revisions to the official season documentation (e.g. the manual, drawings, etc.) or important season news. Between Kickoff and Stop Build Day, Team Updates are posted each Tuesday and Friday. Between Stop Build Day and the week before FIRST Championship Houston, Team Updates are posted each Tuesday. Team updates are posted on the DESTINATION: DEEP SPACE [Game and Season Materials web page](#) and generally posted before 5 pm, Eastern.

Generally, Team Updates follow the following convention:

- Additions are highlighted in yellow. **This is an example.**
- Deletions are indicated with a strikethrough. ~~This is an example.~~
- Notes that are added for clarity or explanation for the change but are not retained as part of the manual appear in bold. **This is an example.**

1.8 QUESTION AND ANSWER SYSTEM

Questions about any **2019 Game and Season Manual** content and [FIRST Robotics Competition Event Experience web page](#) content may be asked to FIRST using the official [Question and Answer System](#) (i.e. “the Q&A”), which opens on January 9, 2019, noon Eastern. Details on the Q&A can be found on the DESTINATION: DEEP SPACE [Game and Season Materials web page](#). The Q&A is intended to help clarify rules, and sometimes the responses result in revisions to the text in the official document (which is communicated using Team Updates).

The Q&A is not a resource for

- rulings on hypothetical strategies or vague situations,
- challenging decisions made at past events, or
- design reviews of a ROBOT system for legality.



The responses in the Q&A do not supersede the text in the manual, although every effort will be made to eliminate inconsistencies between the two. While responses provided in the Q&A may be used to aid discussion at each event, per [Inspection & Eligibility Rules](#) and [REFEREE Interaction](#) sections, REFEREES and Inspectors are the ultimate authority on rules. If you have concerns about enforcement trends by volunteer authorities, please notify *FIRST* at [firstroboticscompetition@firstinspires.org](mailto:FIRST@firstinspires.org).

Weak questions are overly broad, vague, and/or include no rule references. Some examples of questions that will not be answered in the Q&A are:


- Is this part/design legal?
- How should the REFEREE have ruled when this specific game play happened?

Good questions ask generically about features of parts or designs, gameplay scenarios, or rules, and often reference one or more relevant rules within the question. Some examples of questions that will likely be answered in the Q&A are:

- A device we are considering using on the ROBOT comes with purple AWG 40 wire, does this comply with R?? and R??
- We're not sure how to interpret how Rule G?? applies if Blue ROBOT A does X and Red ROBOT B does Y, can you please clarify?



2 2019 GAME OVERVIEW

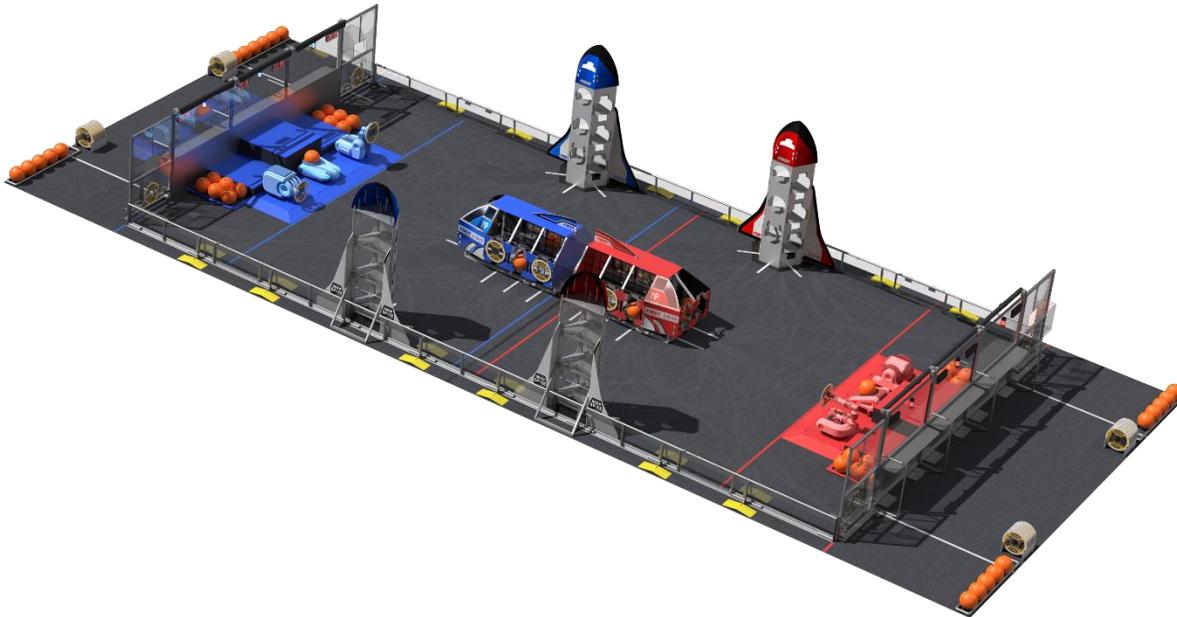

In DESTINATION: DEEP SPACE, Presented By The Boeing Company, we join two competing ALLIANCES collecting samples on Planet Primus. Unpredictable terrain and weather patterns make remote ROBOT operation essential to their mission on the planet. With only 2:30 until liftoff, the ALLIANCES must gather as many CARGO pods as possible and prepare their spaceships before the next SANDSTORM arrives.

T-minus 2:30: A SANDSTORM limits DRIVER visibility so ROBOTS independently follow pre-programmed instructions or are operated by human DRIVERS via video from their stations. ALLIANCES score points by:

1. Deploying ROBOTS from Habitat (HAB)
2. Preparing ROCKETS and CARGO SHIP with HATCH PANELS
3. Loading CARGO pods into their ROCKETS and CARGO SHIP

T-minus 2:15: The SANDSTORM clears, and human operators take control of their ROBOTS. ALLIANCES continue to score points by:

1. Preparing ROCKETS and CARGO SHIP with HATCH PANELS
2. Loading more CARGO pods
3. Returning the ROBOT safely to the ALLIANCE's HAB

0:00: ROCKET liftoff

The ALLIANCE with the highest score at the end of the MATCH wins.



3 SEASON SPONSOR RECOGNITION



Boeing is proud to be the presenting sponsor of the *FIRST*[®] Robotics Competition this season.

For more than 50 years, Boeing has been a leader in human space flight beginning with the Mercury capsule that took the first American to space in 1961. Boeing builds crewed spacecraft, rockets, satellites and more and will continue to keep the U.S. at the forefront of innovation in space exploration - taking humans and technology farther than we've ever been.

How will you be part of the future of space exploration?

Check out boeing.com/space to see where we're heading next!

Good luck to all the teams this season. See you in deep space!



4 ARENA

The ARENA includes all elements of the game infrastructure that are required to play DESTINATION: DEEP SPACE Presented By The Boeing Company: the FIELD, GAME PIECES, and all equipment needed for FIELD control, ROBOT control, and scorekeeping.

The ARENA is modular and assembled, used, disassembled, and shipped many times during the competition season. It will undergo wear and tear. The ARENA is designed to withstand rigorous play and frequent shipping. Every effort is made to ensure that ARENAS are consistent from event to event. However, ARENAS are assembled in different venues by different event staff and some small variations occur. For details regarding assembly tolerances, please refer to the [2019 ARENA Layout and Marking Diagram](#). Successful teams will design ROBOTS that are insensitive to these variations.

Illustrations included in this section are for a general visual understanding of the DESTINATION: DEEP SPACE ARENA, and dimensions included in the manual are nominal. Please refer to the official drawings for exact dimensions, tolerances, and construction details. The official drawings, CAD models, and drawings for low-cost versions of important elements of the DESTINATION: DEEP SPACE FIELD are posted on the [2019 DESTINATION: DEEP SPACE Game & Season Materials page](#) on the *FIRST*[®] website.

4.1 FIELD

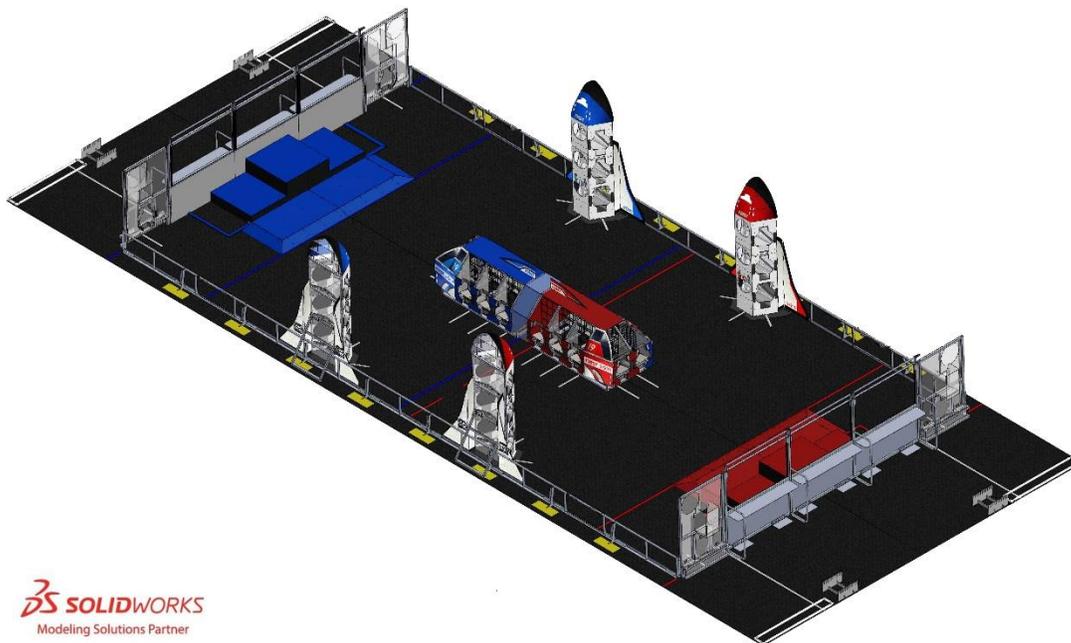


Figure 4-1: DESTINATION: DEEP SPACE

Each FIELD for DESTINATION: DEEP SPACE is a 27 ft. (~823 cm) by 54 ft. (~1646 cm) carpeted area bound by and including the inward- and upward-facing surfaces of the guardrails, inward-facing surfaces of the ALLIANCE WALLS (except Chute surfaces). It is populated with ROCKETS, CARGO SHIPS, HAB PLATFORMS, DEPOTS, and LOADING STATIONS. Two (2) Red ROCKETS and two (2) Blue ROCKETS are on their respective ALLIANCE'S side of the FIELD, positioned against each guardrail.



One (1) Red CARGO SHIP and one (1) Blue CARGO SHIP are centered on the CENTER LINE and face their respective ALLIANCE STATIONS. Each CARGO SHIP is on its ALLIANCE'S side of the FIELD. The small space between the sterns of the CARGO SHIPS is sealed with clear plastic.


Each ROCKET has six (6) BAYS and each CARGO SHIP has eight (8) BAYS. A BAY is a container used to hold one (1) CARGO and can be sealed with one (1) HATCH PANEL. Each BAY has a HATCH which must be covered by a HATCH PANEL for the BAY to retain CARGO.

One (1) Red HAB PLATFORM and one (1) Blue HAB PLATFORM abut the corresponding ALLIANCE WALL and are centered on the MIDLINE. Each HAB PLATFORM is a 12 ft. 6½ in. (~382 cm) by 7 ft. 11½ in. (~243 cm) assembly that consists of Level 1, 2, and 3 platforms, their supporting structures, and the ramp.

Two (2) Red LOADING STATIONS and two (2) Blue LOADING STATIONS are located on their ALLIANCE'S side of the FIELD and intersect perpendicularly with the guardrails.

The surface of the FIELD is low pile carpet, Shaw Floors, Philadelphia Commercial, Neyland II 20, "66561 Medallion" (please note that Neyland II carpet is obsolete and the closest equivalent is Neyland III). The edge of the carpet is secured to the venue floor using 3M™ Premium Matte Cloth Tape GT2 or comparable gaffers tape.

Guardrails form the long edges of the FIELD and are a 1 ft. 7 in. (~48 cm) tall system of transparent polycarbonate supported on the top and bottom by aluminum extrusion. Guardrails, along with the ALLIANCE WALLS, prevent ROBOTS from inadvertently exiting the FIELD during a MATCH. There are four (4) gates in the guardrail that allow access to the FIELD for placement and removal of ROBOTS. The gate passthrough, when open, is 3 ft. 2 in. (~97 cm) wide. Gates are closed and shielded during the MATCH.

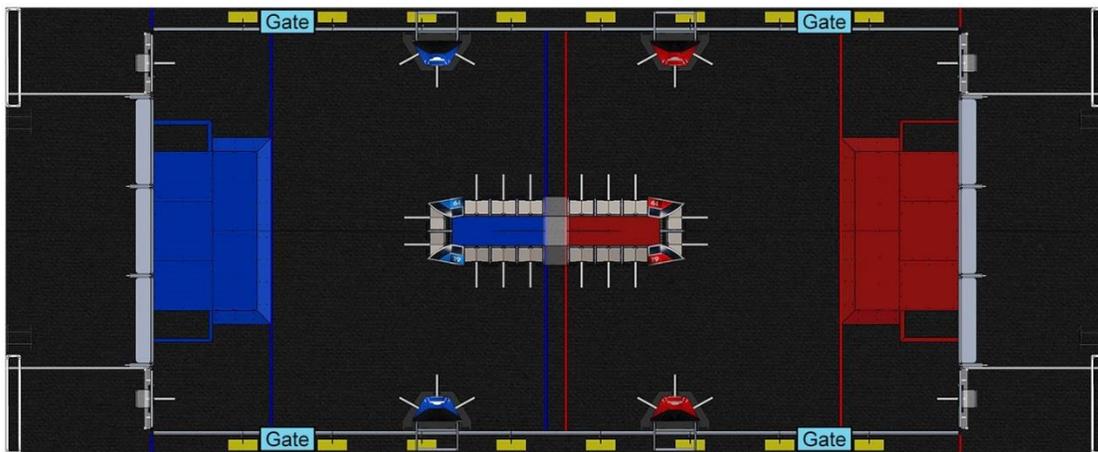

 **SOLIDWORKS**
Modeling Solutions Partner

Figure 4-2 Gate locations

There are two versions of guardrails and PLAYER STATIONS used for competitions. One design has been used at *FIRST* Robotics Competitions for several years and matches the [2019 Official *FIRST* FIELD Drawings & Models](#). The other is designed and sold by AndyMark. While the designs are slightly different, the critical dimensions, performance, and expected user experience between the two are the same. Detailed drawings for the AndyMark design are posted on the [AndyMark website](#). All illustrations in this manual show the traditional FIELD design.



A run of steel, black powder coated cable protectors ([VEX part number 217-6294](#)) extends from the center of the guardrail on the scoring table side of the FIELD to the center of the FIELD, between the CARGO SHIPS. A cable protector run is made up of three (3) long segments and an exit segment (note, the exit segments are not available for purchase). The total length of the cable protector run is 11 ft. 11 $\frac{3}{4}$ in (~365 cm). The long cable protector segment is a custom steel channel that is $\frac{7}{8}$ in. tall, 8 in. wide, and 3 ft. 11 $\frac{1}{8}$ in. long (~2 cm tall, ~20 cm wide, and ~120 cm long). It is secured to the carpet using hook fastener which increases the height to approximately $1\frac{5}{16}$ in. (~2 cm). Exit segments are attached to the guardrail with hook fastener and are 6 in. tall, 8 in. wide and 2 $\frac{3}{4}$ in. deep (~15 cm tall, ~20 cm wide and ~7 cm deep).



Figure 4-3 Cable Protector

4.2 ZONES AND MARKINGS

FIELD Zones and markings of consequence are described below. Unless otherwise specified, the tape used to mark lines and zones throughout the FIELD is 2-in. (~5cm) [3M™ Premium Matte Cloth \(Gaffers\) Tape \(GT2\)](#).

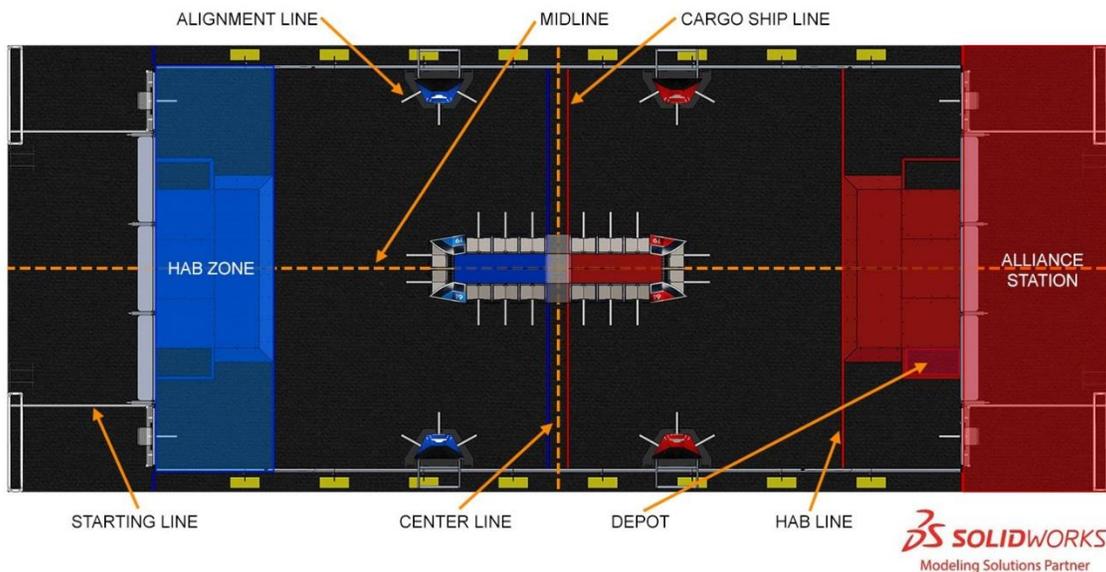


Figure 4-4 DESTINATION: DEEP SPACE FIELD

ALIGNMENT LINE: one of thirty-two (32) white gaffers tape marks adhered to the carpet that start 1 ft. 6 in. (~46 cm) from the outermost face of the assembly and extend to the point where the carpet meets the assembly and centered at GAME PIECE placement/retrieval points.



- one (1) ALIGNMENT LINE for each of the three (3) faces of each ROCKET
- one (1) ALIGNMENT LINE for each CARGO SHIP BAY
- one (1) ALIGNMENT LINE for each LOADING STATION



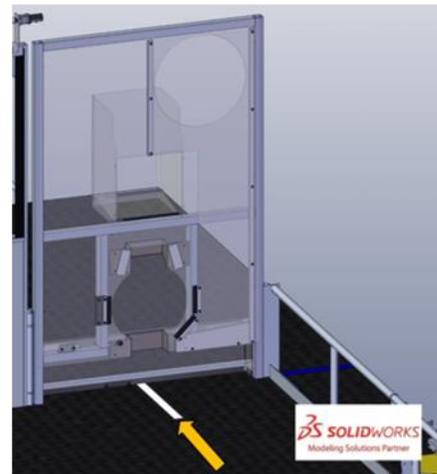


Figure 4-5 ALIGNMENT LINES (three (3) places per ROCKET, eight (8) places per CARGO SHIP, and one (1) place per LOADING STATION)

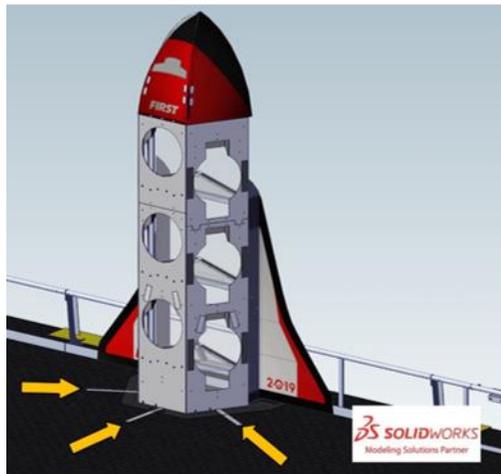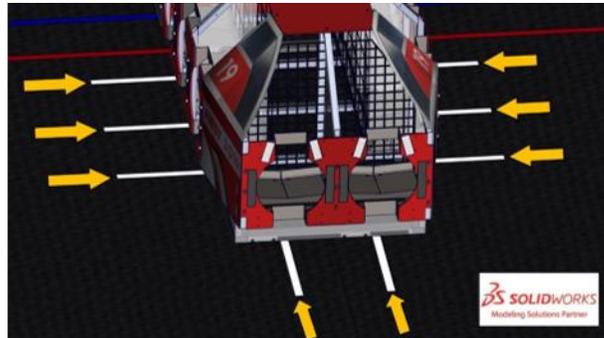

ALLIANCE STATION: a 30-ft. (~914 cm) wide by 10-ft. (~305 cm) deep infinitely tall volume formed by, and including the ALLIANCE WALL, the edge of the carpet, and ALLIANCE colored tape.

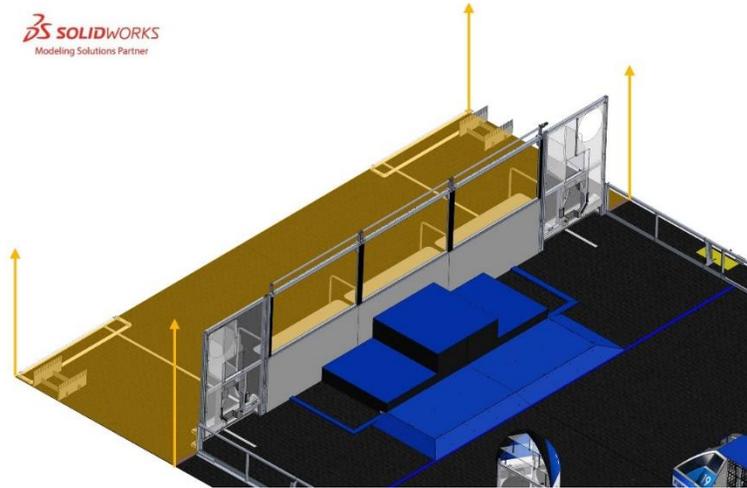


Figure 4-6 Blue ALLIANCE STATION

CARGO SHIP LINE: one of two (2) tape lines that extend the width of the FIELD and are colinear with the stern of each CARGO SHIP. The tape color matches the color of the closest ALLIANCE WALL.

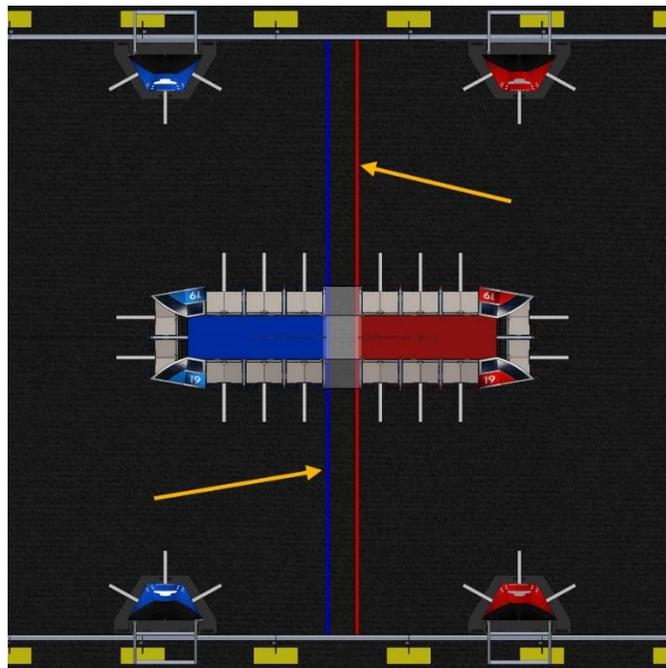


Figure 4-7 CARGO SHIP LINES



CENTER LINE: an unmarked reference line that bisects the length of the FIELD.

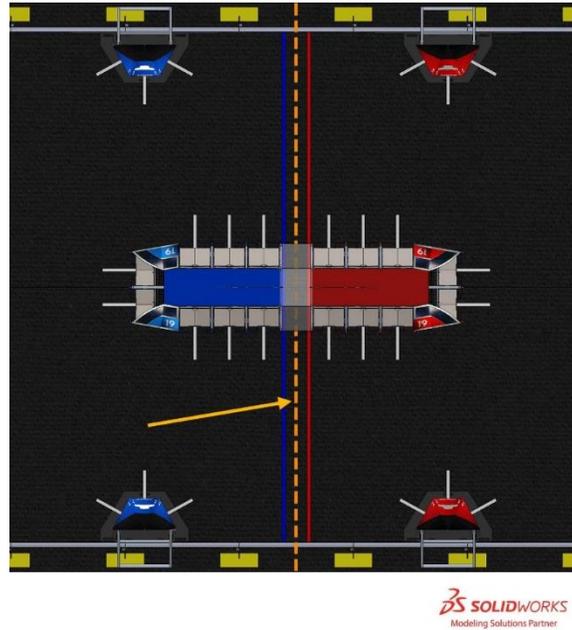


Figure 4-8 CENTER LINE

HAB LINE: one (1) of two (2) tape lines that extend the width of the FIELD and are colinear with and overlap the bottom of the HAB ramp by 1 in. The tape color matches the color of the closest ALLIANCE STATION.


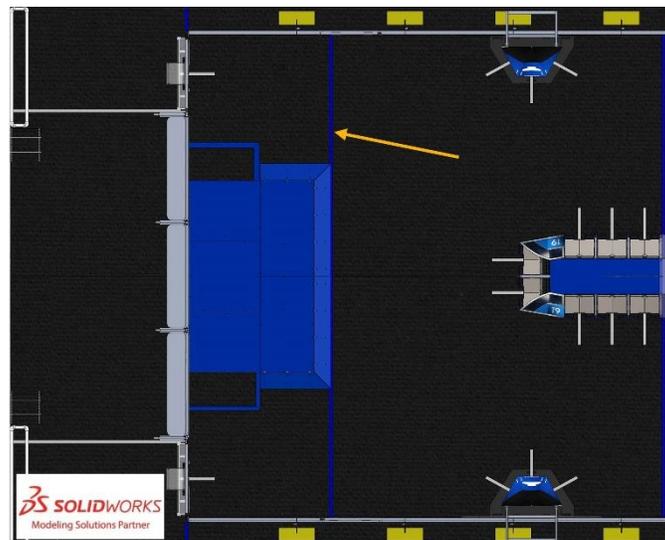


Figure 4-9 Blue HAB LINE

HAB ZONE: an infinitely tall volume defined by the guardrail, ALLIANCE WALL, and the HAB LINE. The HAB ZONE includes the HAB LINE.




MIDLINE: a reference line that bisects the width of the FIELD and is marked by black tape that covers the mating seam of the two strips of carpet.

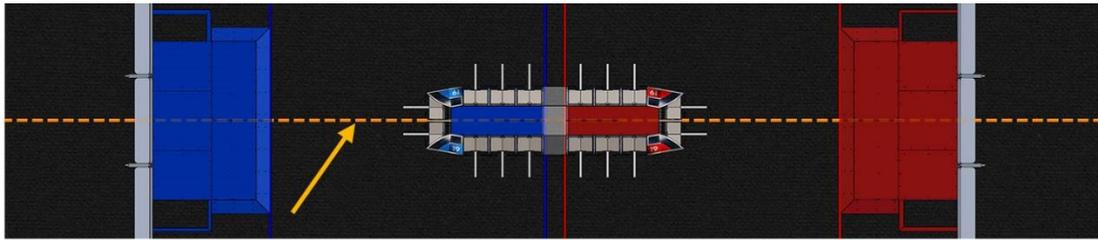

DS SOLIDWORKS
Modeling Solutions Partner

Figure 4-10 MIDLINE

STARTING LINE: one (1) of two (2) lines in an ALLIANCE STATION, marked by white tape, that extends from the back of the outermost Driver Station Support assembly to the back of the ALLIANCE STATION.

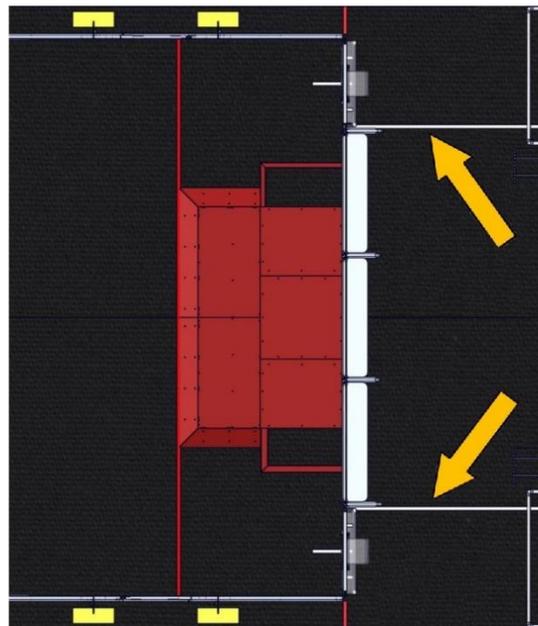

DS SOLIDWORKS
Modeling Solutions Partner

Figure 4-11 Red ALLIANCE STARTING LINES



4.3 ROCKET



Figure 4-12 Red ROCKET

A ROCKET is a 10 ft. 4 in. (~315 cm) tall assembly placed such that its centerline is 8 ft. (~244 cm) from the CENTER LINE, and its “front” face is parallel to the guardrail, faces its CARGO SHIP, and 2 ft. 3½ in. (~70 cm) from the guardrail. The distance from the front of the “front” face to the back of the “back” face is 1 ft. 7⅝ in. (~50 cm). The angle of its sides is 61¼ degrees. Each ROCKET sits on top of a base; the base is not part of the ROCKET.

Each ROCKET has three (3) levels that collectively reach 7 ft. 10 in. tall (~239 cm) and are topped by one (1) nosecone. A nosecone is a FIELD assembly that caps each ROCKET and is lit per the [Scoring](#) section. Each level has two (2) BAYS. Note per the [Scoring](#) section only one (1) CARGO per BAY contributes to the ALLIANCE’s MATCH score.

A PORT is one of three (3) 1 ft. 4 in. (~41 cm) diameter holes in the “front” face of each ROCKET. The center of the lowest PORT is 2 ft. 3½ in. (~70 cm) from the carpet, and the distance between the centers of each PORT is 2 ft. 4 in. (~71 cm).

A HATCH is an opening on a ROCKET or CARGO SHIP on which HATCH PANELS must be placed to retain CARGO. There are two types of HATCHES: a ROCKET HATCH and a CARGO SHIP HATCH.

A ROCKET HATCH is one (1) of three (3) 2 ft. 1 in. (~64 cm) tall by 1 ft. 4½ in. (~42 cm) wide cutouts on each side of a ROCKET. The center of the lowest cutout is 1 ft. 7 in. (~48 cm) from the carpet. The vertical distance between the centers of each ROCKET HATCH is 2 ft. by 4 in. (~71 cm).



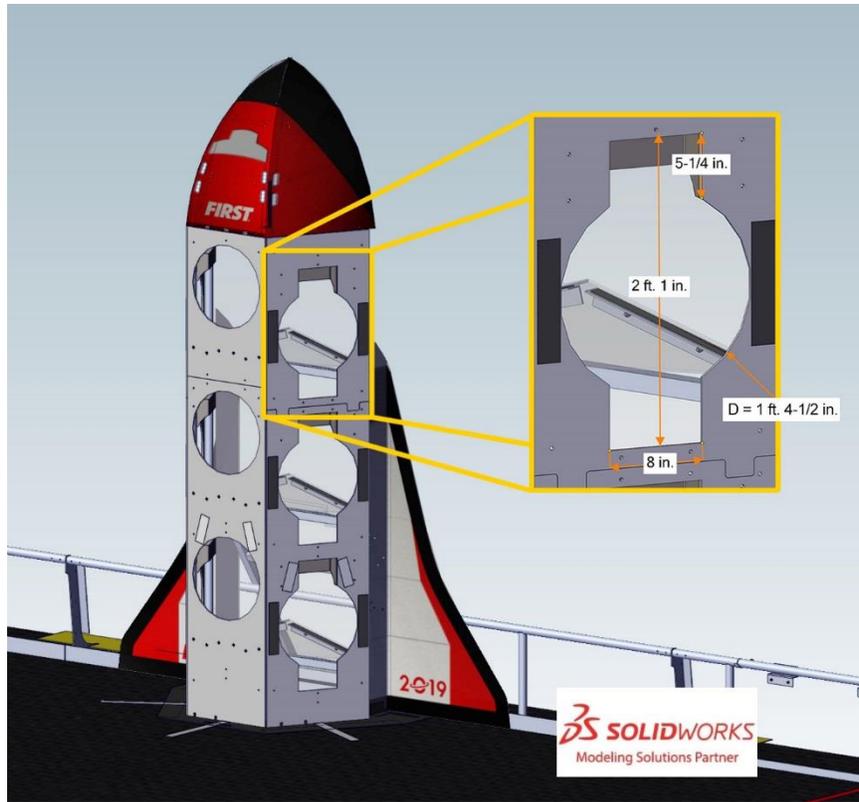


Figure 4-13 ROCKET HATCHES and dimensions

The HATCH PANEL placement height at the bottom of a ROCKET equals the HATCH PANEL placement height on the CARGO SHIP (per the [CARGO SHIP](#) section), which equals the HATCH PANEL retrieval height from the LOADING STATION (per the [LOADING STATION](#) section).

The top of each ROCKET HATCH is backed by a cavity that includes an arched backstop that is $7\frac{3}{4}$ in. (~20 cm) wide with a minimum height of 3 in. (~8 cm). It limits the depth of the HATCH to $\frac{3}{4}$ in (~8 cm).

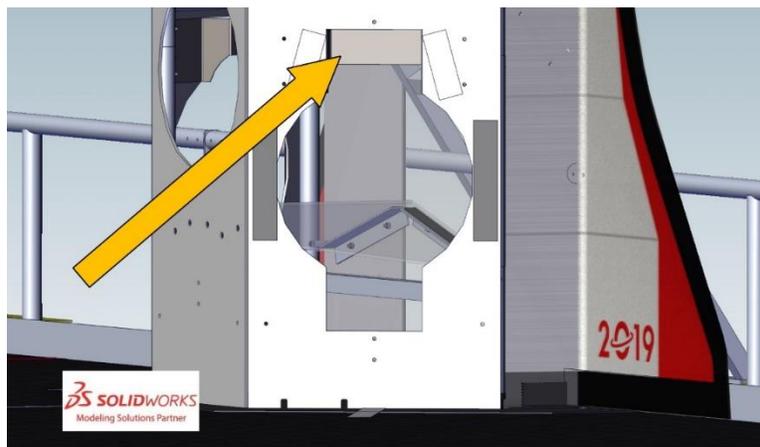


Figure 4-14 ROCKET HATCH backstop, one (1) per ROCKET HATCH

The backstop reduces the likelihood that HATCH PANELS enter and get stuck in BAYS.



Each ROCKET HATCH is flanked by two (2) 10 in. (~25 cm) tall, 2 in. (~ 5 cm) wide pieces of black hook tape (3M part number SJ3572), positioned as shown below.

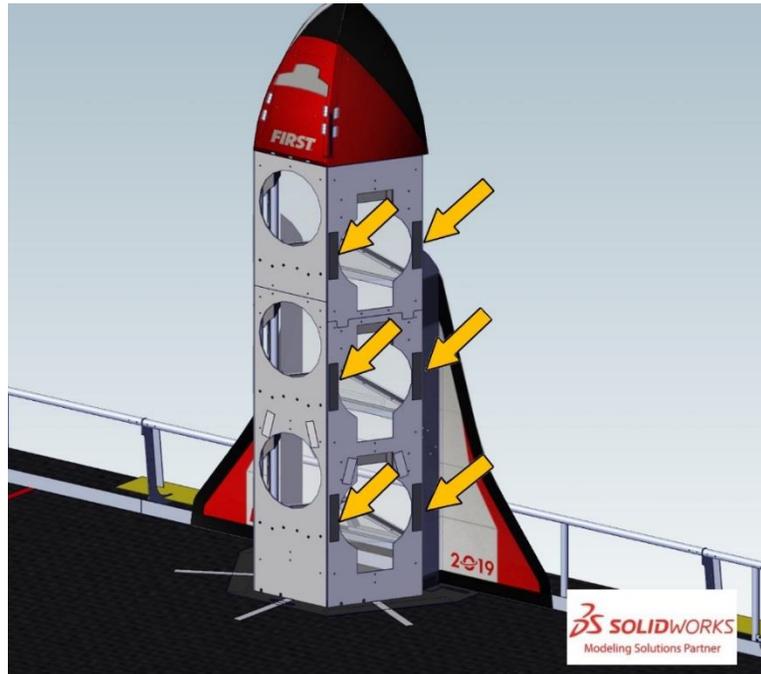


Figure 4-15 ROCKET hook tape locations, two (2)/BAY.

The inside of each ROCKET BAY has an angled ramp which directs CARGO out the HATCH.

Note that two (2) ROCKET BAYS at the same height as each other can, together, physically accommodate more than two (2) CARGO, however CARGO in excess of two (2) per level will not be counted per the [Scoring](#) section.

Each ROCKET is flanked by two (2) wings. A wing is a sheet of bent plastic that is 6 ft. 2 in. (~188 cm) tall, 2 ft. 5¼ in. (~74 cm) long, and 7⅝ in. (~19 cm) deep. The backs of the wings are tacked to the GUARDRAIL polycarbonate with double-sided polyethylene plastic mounting tape ([McMaster part number 77185A23](#)).

4.4 CARGO SHIP

Each CARGO SHIP is a 7-ft. 11¾-in. (~243 cm) long, 4-ft. 7¾ in. (~142 cm) wide, and 4 ft. (~122 cm) tall (excluding its fin) assembly with eight (8) BAYS, three (3) on each side and two (2) on the front (the front faces its ALLIANCE WALL). CARGO SHIPS are placed back-to-back, 9 in. (~23 cm) from the middle of the FIELD and centered on the MIDLINE.



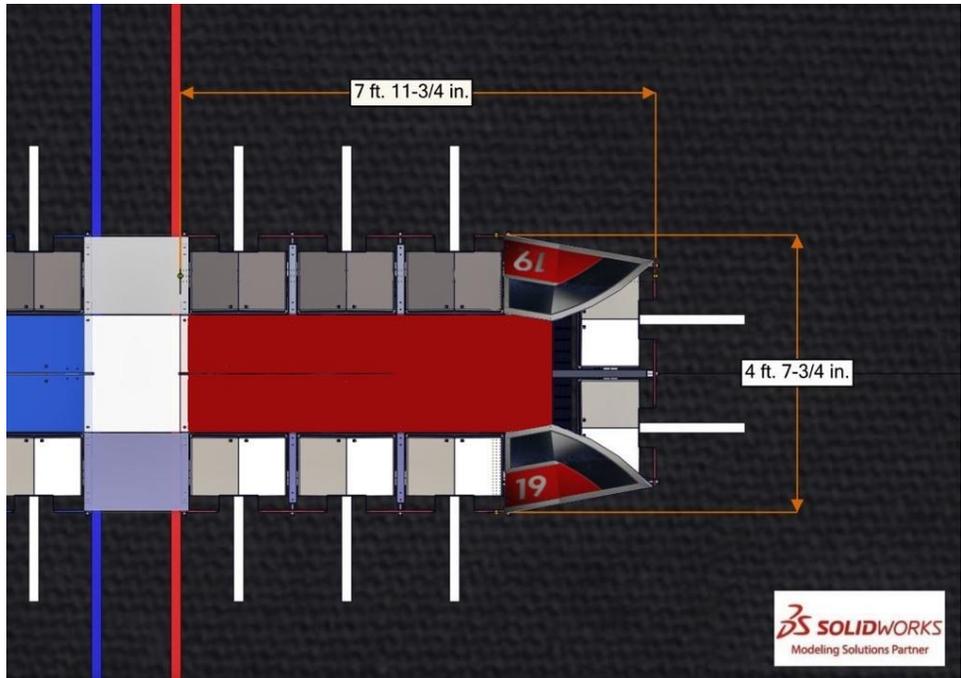


Figure 4-16 Overall CARGO SHIP length and width.

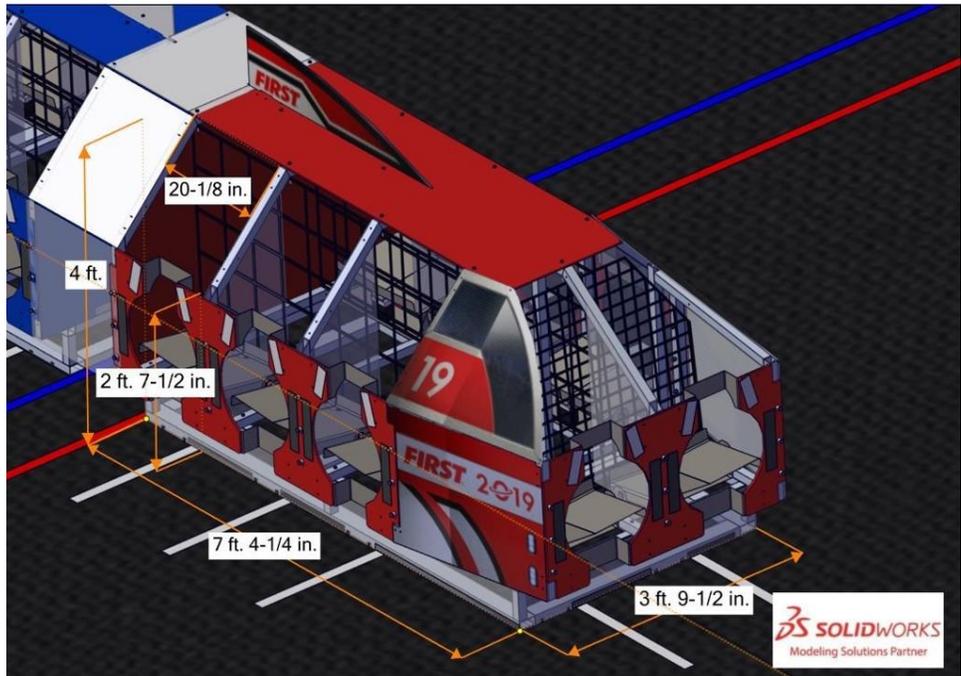


Figure 4-17 Major CARGO SHIP dimensions.

Each BAY has a CARGO SHIP HATCH for one (1) HATCH PANEL. CARGO SHIP HATCH geometry is similar, but not identical, to ROCKET HATCH geometry and is detailed below in Figure 4-18.



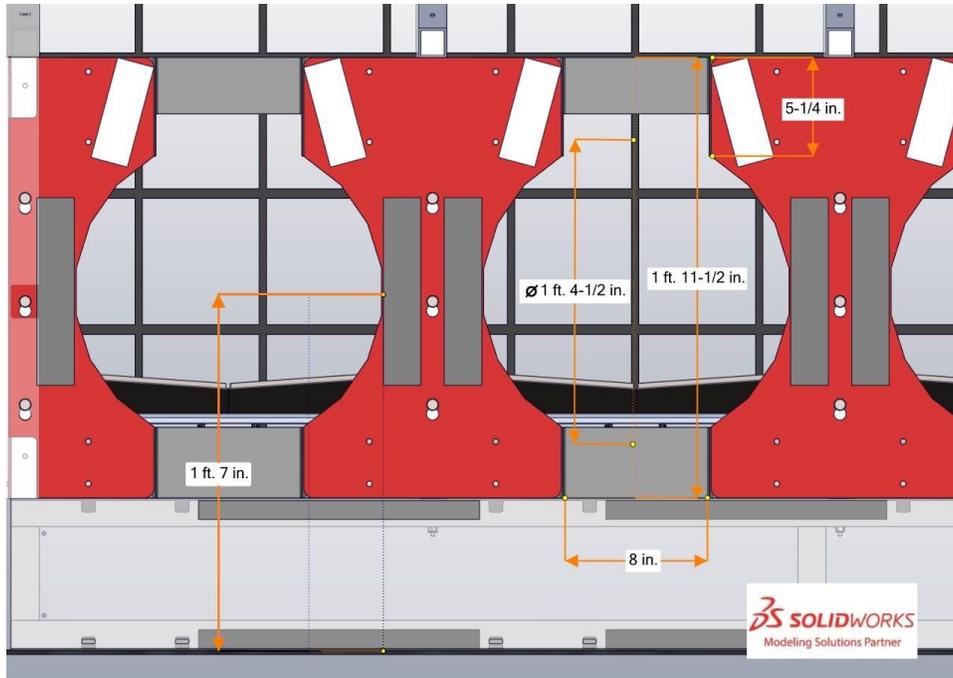


Figure 4-18 CARGO SHIP HATCH geometry and dimensions.

Each CARGO SHIP HATCH is backed by a cavity that includes two (2) backstops. The backstops each have an inner width of $7\frac{3}{4}$ in. (~20 cm) and a depth of $\frac{3}{4}$ in. (~8 cm). The top backstop has a minimum height of 3 in. (~8 cm), and the bottom backstop has a minimum height of $\frac{3}{4}$ in. (~8 cm).

The backstop prevents HATCH PANELS from entering and getting stuck in BAYS.

Each BAY capacity is approximately three (3) CARGO but note per the [Scoring](#) section only one (1) CARGO per BAY contributes to the ALLIANCE's MATCH score. The back of each BAY is a cargo net (for side BAYS, the net is [Hall-Master, item no. 69618](#), square or diamond pattern, and for front BAYS, the net is [PowerTye, Part #50362](#)). Nets are used to retain GAME PIECES in the CARGO SHIP and are not intended to behave consistently.

BAY floors are initially sloped to retain CARGO. At the end of the SANDSTORM PERIOD, T-minus135s, they tilt (magnets holding the back of the floor down disengage) causing CARGO to roll out of the CARGO SHIP if no HATCH PANEL has been attached to the corresponding HATCH.

There are three (3) posts on each side of each HATCH. Each post is $\frac{5}{8}$ in. (~2 cm) in diameter and extends $\frac{3}{4}$ in. (~2 cm) from the face of the CARGO SHIP. Posts are aligned vertically and positioned such that the center of the lower post is 1 ft. 1 in. (~33 cm) from the floor and their centers are $5\frac{1}{2}$ in. (~14 cm) apart.



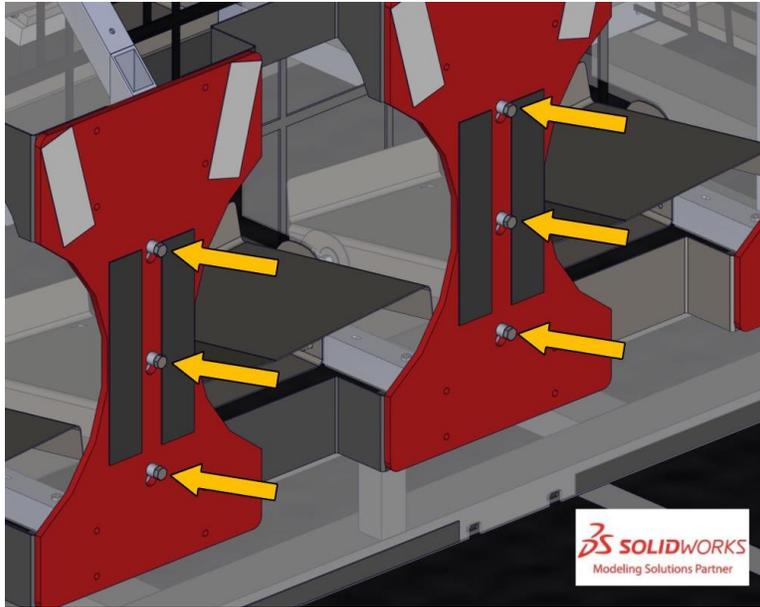


Figure 4-19 Posts

Each CARGO SHIP has an 8 in. (~20 cm) tall recess around the bottom. The recess is $5\frac{3}{16}$ in. (~13 cm) deep on each side of the CARGO SHIP and $7\frac{3}{8}$ in. (~19 cm) deep on the front of the CARGO SHIP (relative to the face to which the HATCH PANELS are mounted). There is a $\frac{1}{8}$ in. thick piece of polycarbonate that spans the back of the recess.

The recess around the bottom of the CARGO SHIP gives BUMPER clearance and allows ROBOTS to interact with the CARGO SHIP using ROBOT parts inside the FRAME PERIMETER.

Each CARGO SHIP has a yellow light suspended inside the aft part of the ship which, if on, indicates that a MATCH is not in progress and the magnets securing the BAY floors are energized.

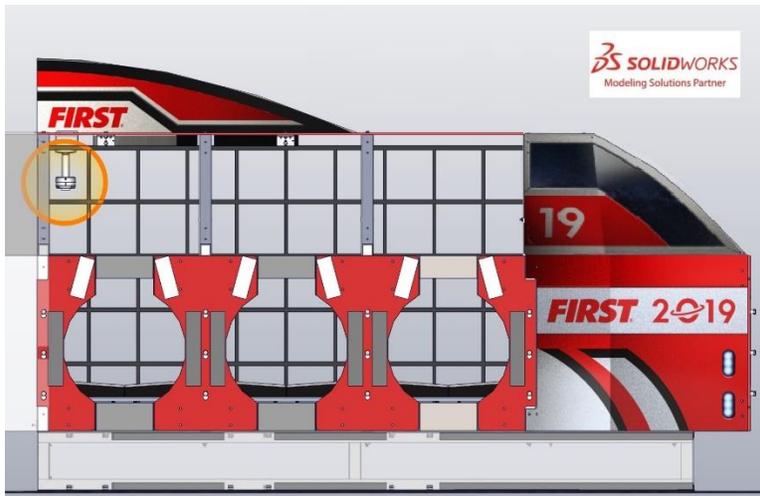


Figure 4-20 CARGO SHIP light location



4.5 HAB PLATFORM

The HAB PLATFORM consists of a ramp, four (4) decks at three levels, the ALLIANCE colored tape that traces the intersection of the ramp and the carpet, and all relevant supporting structure. Major HAB PLATFORM dimensions are as shown in Figure 4-21.

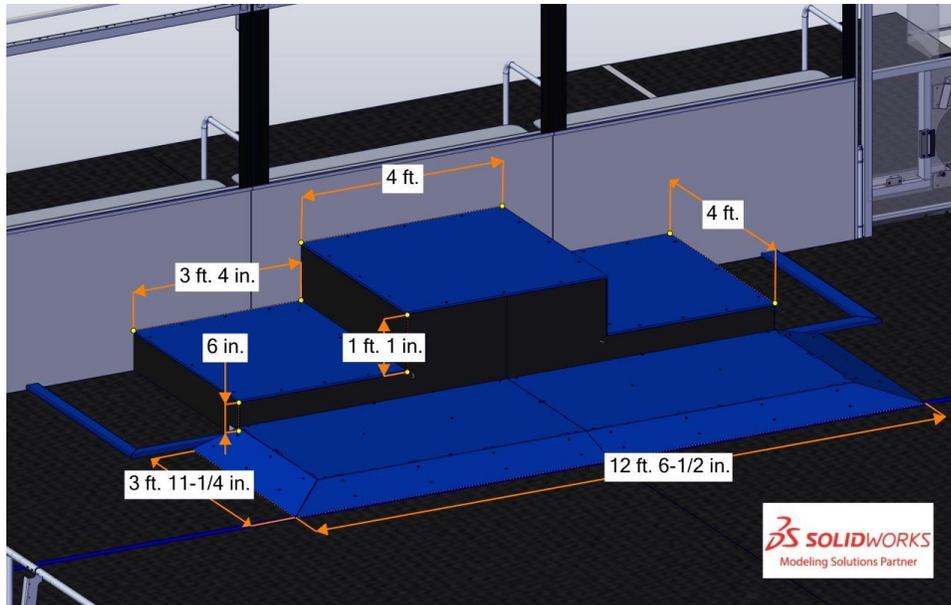


Figure 4-21 Blue HAB PLATFORM with major dimensions.

The deck surfaces are ½-in. (~1 cm) textured HDPE sheets.

The decks define the levels for scoring purposes as follows.

- The lowest deck, the ramps, and the strips of ALLIANCE colored tape that trace the intersections of the ramps and the carpet form Level 1. The Level 1 deck is 3 in. (~8 cm) high by 10 ft. 8 in. (~325 cm) long by 3 ft. (~91 cm) deep. The ramps are 11½ in. (~29 cm) long with a 15-degree angle.
- The middle two (2) decks form Level 2. Each Level 2 deck is 3 ft. 4 in. (~102 cm) wide by 4 ft. (~122 cm) deep. Level 2 is 6 in. (~15 cm) higher than the deck of Level 1.
- The highest deck forms Level 3. The Level 3 deck is 4 ft. (~122 cm) wide by 4 ft. (~122 cm) deep. Level 3 is 1 ft. 1 in. (~33 cm) higher than Level 2.



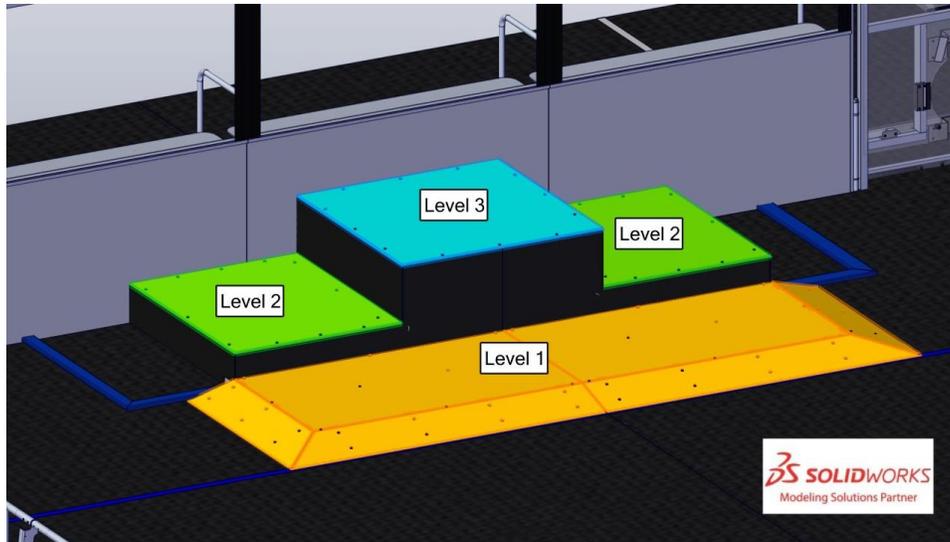


Figure 4-22 HAB PLATFORM Levels

4.6 DEPOT

A DEPOT is an area used to stage CARGO at the start of the MATCH per the [Setup](#) section. Each DEPOT is bounded by, but does not include, its ALLIANCE's HAB PLATFORM, ALLIANCE WALL, and rails and its inside dimensions are 1 ft. 9 $\frac{3}{4}$ in. (~55 cm) wide by 3 ft. 7 $\frac{5}{8}$ in. (~111 cm) deep. A rail is a 1 $\frac{1}{8}$ -in. (~3 cm) tall and 3-in. (~8 cm) wide steel barrier that is attached to the ARENA carpet using 2-in. (~5 cm) wide 3M™ Hook Fastener SJ3572.

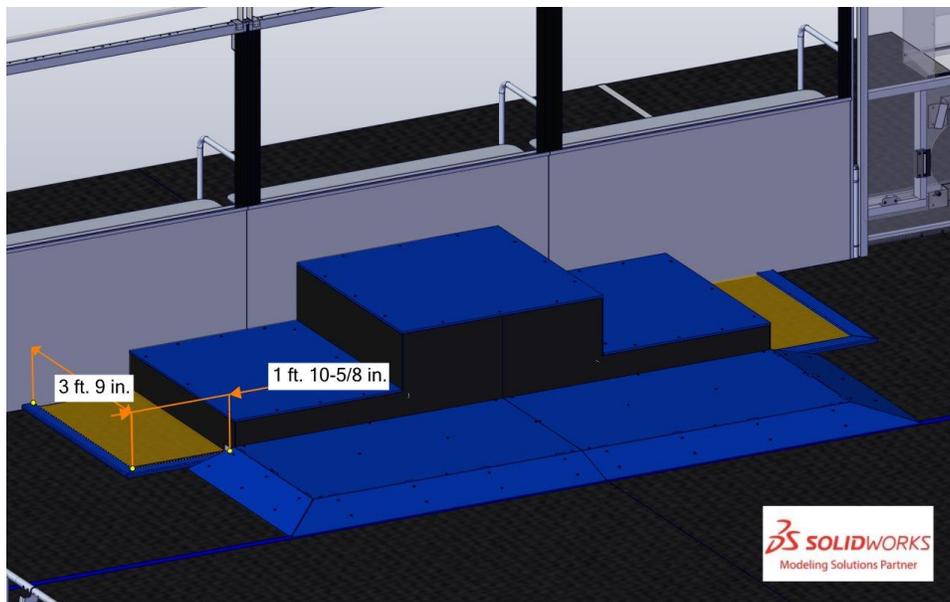


Figure 4-23 Blue DEPOTS

4.7 SANDSTORM

The SANDSTORM is installed above each ALLIANCE WALL. The SANDSTORM is an assembly that features three (3) shutters, each directly above a PLAYER STATION. Each shutter consists of a 4 ft. 6 in. (~137 cm) tall by 5 ft. 8 in. (~173 cm) wide black out material ([IFR Rip Stop Nylon](#) from Rose Brand in



Black). Just before the MATCH, shutters are lowered on the HAB ZONE side of the PLAYER STATION transparent plastic panels. At the end of the SANDSTORM PERIOD, the shutters retract over a period of ~2 seconds to reveal the FIELD to DRIVE TEAMS. The shutters remain retracted for the remainder of the MATCH.

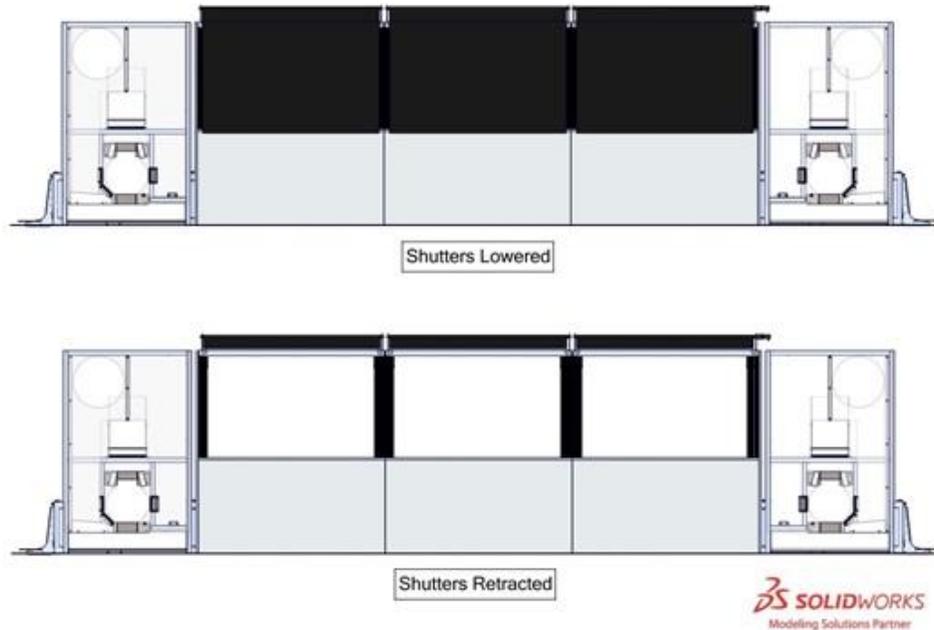


Figure 4-24 SANDSTORM

4.8 ALLIANCE STATION

4.8.1 ALLIANCE WALL

The ALLIANCE WALL is a 6-ft. 6-in. (~198 cm) tall structure that separates ROBOTS from DRIVE TEAMS (except the TECHNICIAN) and consists of three (3) PLAYER STATIONS, and two (2) LOADING STATIONS. ALLIANCE WALLS define the short edges of the FIELD and, along with the guardrails, prevent ROBOTS from inadvertently exiting the FIELD during the MATCH.

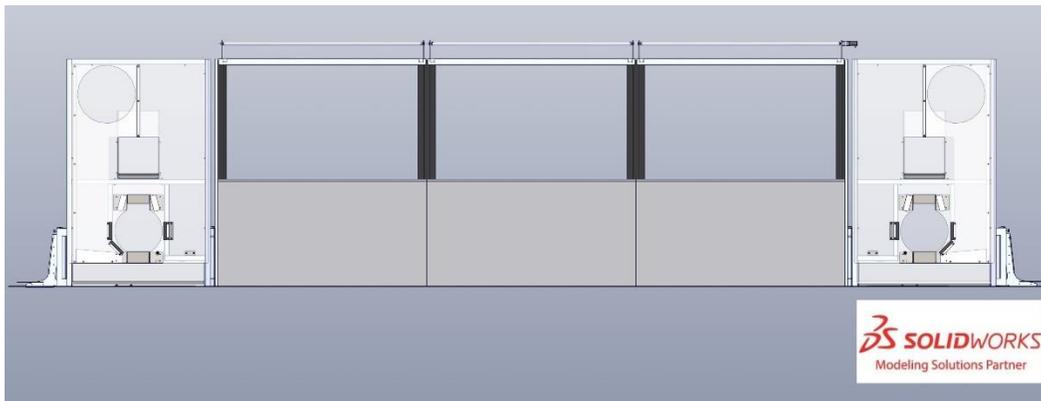


Figure 4-25 ALLIANCE WALL



4.8.1.1 PLAYER STATION

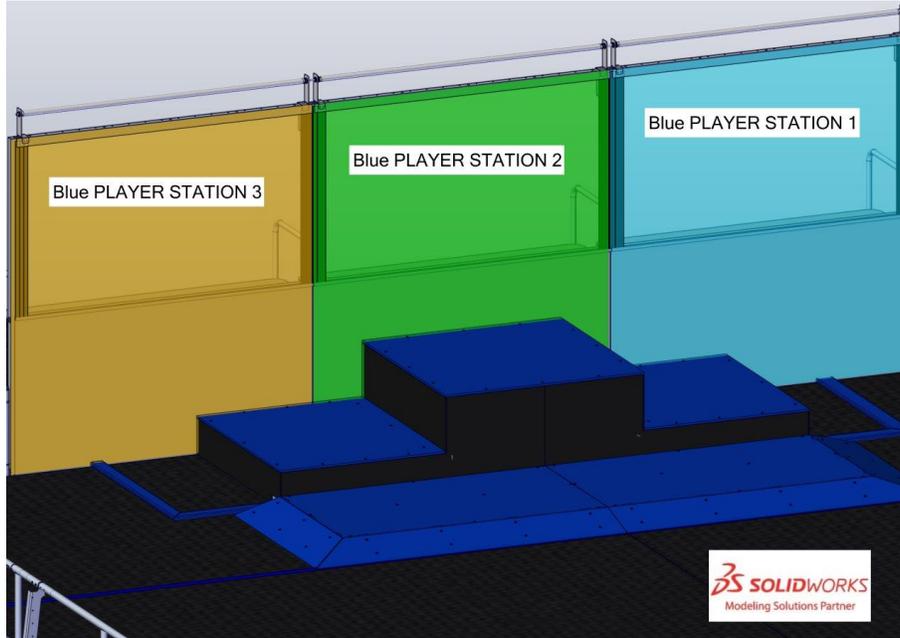


Figure 4-26 Blue PLAYER STATIONS

A PLAYER STATION is one (1) of three (3) assigned positions in an ALLIANCE WALL from where a DRIVE TEAM operates their ROBOT. Each PLAYER STATION is made from a 3 ft. (~91 cm) tall diamond plate base topped with a 3 ft. 6 in. (~107 cm) tall transparent plastic sheet and a top rail. An aluminum shelf is attached to each PLAYER STATION to support the DRIVE TEAM'S OPERATOR CONSOLE. The shelf is 5 ft. 9 in. (~175 cm) wide and 1 ft. ¼ in. (~31 cm) deep. There is a 4 ft. 6 in. (~137 cm) long by 2 in. (nominal) wide strip of hook-and-loop tape ("loop" side) along the center of the support shelf that may be used to secure the OPERATOR CONSOLE to the shelf.

Three (3) in. (~7.6 cm) of black tape is applied to the left and right edges of the PLAYER STATION polycarbonate window, on the FIELD side.





Figure 4-27 Tape on PLAYER STATION window

Each PLAYER STATION contains the following COMPONENTS for teams:

- One Ethernet Cable: attaches to the Ethernet port of the OPERATOR CONSOLE and provides connectivity to the Field Management System.
- One 120VAC NEMA 5-15R power outlet: located on each PLAYER STATION shelf and protected by its own 2-Amp circuit breaker. It can be used to power the OPERATOR CONSOLE. DRIVE TEAMS are responsible for monitoring their power consumption as a tripped breaker in the outlet does not constitute an ARENA FAULT. For some events in regions that don't use NEMA 5-15 shaped outlets, event organizers may install appropriate plug adapters to be used throughout the event.
- One Emergency Stop (E-Stop) button: located on the left side of the PLAYER STATION shelf and is used to deactivate a ROBOT in an emergency.
- One Team sign: displays the team number and located at the top of each PLAYER STATION.
- One Team LED: indicates ALLIANCE color, ROBOT status, and E-Stop status and centered at the top of each PLAYER STATION. Team LED states include:
 - Solid: indicates that the ROBOT is connected and enabled. This will only happen during a MATCH.
 - Blinking: indicates that either the Field Management System is preset for the MATCH or it's during a MATCH and the corresponding ROBOT has lost connectivity.
 - Off: indicates that the MATCH has not started yet, but the ROBOT is linked and DISABLED.
 - If the amber LED is on, the E-stop button has been pressed.
- One Timer (in PLAYER STATION 2): displays the official time remaining in the MATCH and TIMEOUTS and is marked with white tape along the bottom edge.
- Field Management System hardware and wiring: mostly located below the center PLAYER STATION shelf.



4.8.1.2 LOADING STATION

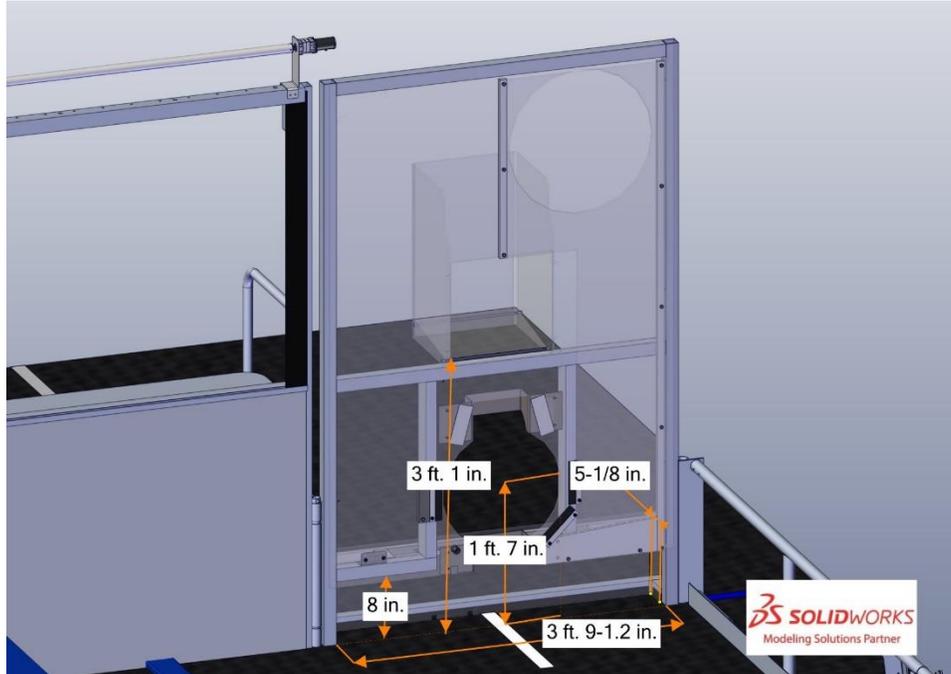


Figure 4-28 LOADING STATION

A LOADING STATION is a FIELD assembly that allows HUMAN PLAYERS to feed GAME PIECES to ROBOTS. One LOADING STATION is located at either end of the ALLIANCE WALL (i.e. in each of the four corners of the FIELD). A LOADING STATION consists of a vertical wall and supporting elements which allow a Drive team member to deliver a GAME PIECE to a ROBOT.

HATCH PANELS placed from the ALLIANCE STATION in the round hole drop down onto pins on the FIELD-side of the wall, and rest vertically such that the center of the HATCH PANEL is 1 ft. 7 in. (~48 cm) above the carpet. HATCH PANELS are retained by brushes (Frost King Model #C35PH, available at Home Depot, SKU #291722) until retrieved from their position by a ROBOT. The LOADING STATION HATCH is similar, but not identical, to the ROCKET and CARGO SHIP HATCHES and is detailed in Figure 4-28.

Like the CARGO SHIP HATCH, the LOADING STATION HATCH is backed by two (2) backstops. The backstops each have an inner width of 7¼ in. (~20 cm) and a depth of ¾ in. (~8 cm). The top backstop has a minimum height of 3 in. (~8 cm), and the bottom backstop has a minimum height of ¾ in. (~8 cm).

A CARGO dropped in to the chute falls out the FIELD side of the LOADING STATION through a 1 ft. 2¼ in. (~36 cm) long square hole 3 ft. 1 in. (~94 cm) from the carpet.

Each station has an 8 in. (~20 cm) tall by 3 ft. 9½ in. (~116 cm) wide by 5½ in. (~13 cm) deep recess at the bottom to accommodate ROBOT BUMPERS. There is a plastic and metal guard behind the station to isolate humans from ROBOTS.

4.8.2 GAME PIECE HOLDERS

Each ALLIANCE STATION has two (2) Panel hold assemblies. A HATCH PANEL Holder is a 1 ft 10 in. (~56 cm) long by 1 ft 7 in. (~48 cm) wide by 10 in. (~25 cm) tall HDPE rack positioned such that one is in each of the back corners of the ALLIANCE STATION. Each HATCH PANEL Holder can hold up to eleven (11) HATCH PANELS in their vertical orientation.



Each ALLIANCE STATION also has two (2) CARGO Holders. A CARGO Holder is a 6 ft 8 in. (~203 cm) long by 1 ft (~30 cm) wide by 2 in. (~5 cm) tall PVC rectangle positioned next to the PANEL Holder and against the back of the ALLIANCE STATION. Each CARGO Holder can hold up to six (6) CARGO.

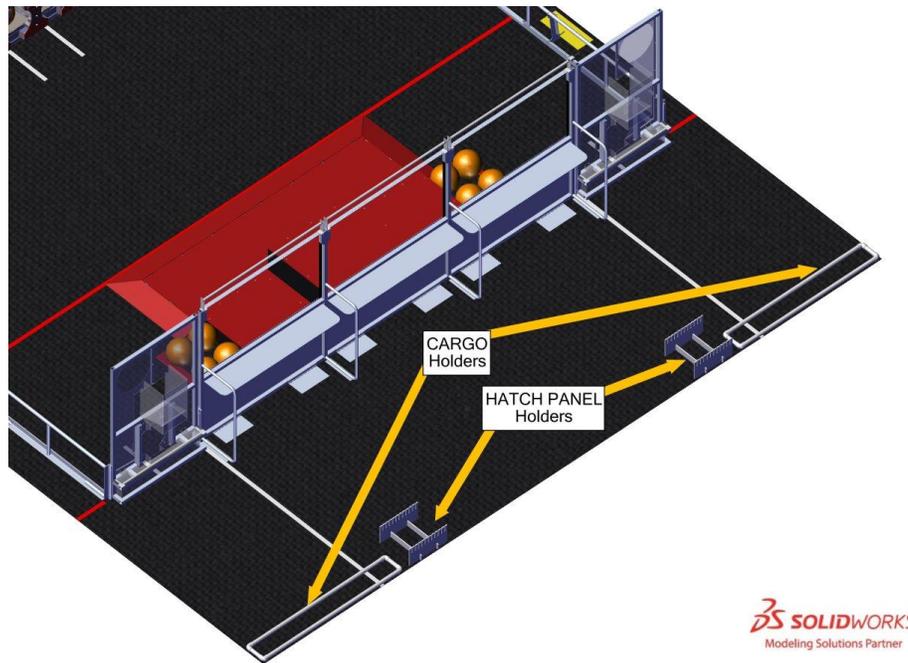


Figure 4-29 GAME PIECE Holders

4.9 GAME PIECES

There are two types of GAME PIECES: CARGO and HATCH PANELS.

4.9.1 CARGO

Each CARGO is an orange 13-in. (~33 cm) $\pm\frac{1}{2}$ in. (~1.2 cm) diameter rubber playground ball with a *FIRST* logo as shown in Figure 4-30. The ball is made by Sportime (PN 1623139E) and sold by AndyMark ([PN am-4000 cargo](#)). The closest commercially available substitute, a red ball with no *FIRST* logo (same size and material), is available at School Specialty (Sportime PN [1293618](#)).

These playground balls used as CARGO are not manufactured with any tight tolerance. They're not balanced all the way around and wall thickness varies so they may not always roll straight or bounce as expected.





Figure 4-30 CARGO

4.9.2 HATCH PANEL

Each HATCH PANEL is a circular $\frac{3}{16}$ -in. (~5 mm) thick polycarbonate toroid. The outside diameter of the toroid is 19 in. (~48 cm) and the diameter of the hole centered in the toroid is 6 in. (~15 cm). The edge and outside ~1 in. (~3 cm) of both sides of the toroid are covered with white 3M™ Fastener SJ3571 loop tape (PN 70070457349).

The HATCH PANELS that shipped in the Kickoff Kits and that will be used in official DESTINATION: DEEP SPACE competitions are [VEXpro part number 217-6562](#). Due to sourcing complexities, most panel inventory available for purchase uses a different, but functionally equivalent, loop tape.



Figure 4-31 HATCH PANEL

4.10 VISION TARGETS

Vision targets are located on the ROCKETS, CARGO SHIPS, and LOADING STATIONS and highlight the locations of the HATCHES, PORTS, and HATCH PANEL retrieval locations. A vision target is a pair of $5\frac{1}{2}$ in. (~14 cm) long by 2 in. (~5 cm) wide strips of 3M 8830 Scotchlite Reflective Material. Strips are angled toward each other at ~14.5 degrees with a tolerance of approximately ± 1 degree in respect to the



part to which it's adhered (but please note, as stated earlier in this manual that "every effort is made to ensure that ARENAS are consistent from event to event. However, ARENAS are assembled in different venues by different event staff and some small variations occur") and such that there's an 8-in. (~20 cm) gap at their closest points.

Vision targets on the "front" face of the ROCKET highlight the top of the lowest PORT and are 3 ft 3½ in. (~99 cm) above the carpet at their highest point.

Vision targets on the "side" faces of the ROCKET highlight the location of the top of the lowest HATCH and are 2 ft 7½ in. (~80 cm) above the carpet at their highest point (the same height as the top of the HATCH opening).

Vision targets also highlight the locations of the tops of each CARGO SHIP HATCH and the tops of each LOADING STATION HATCH (at the same height as the ROCKET HATCH targets).

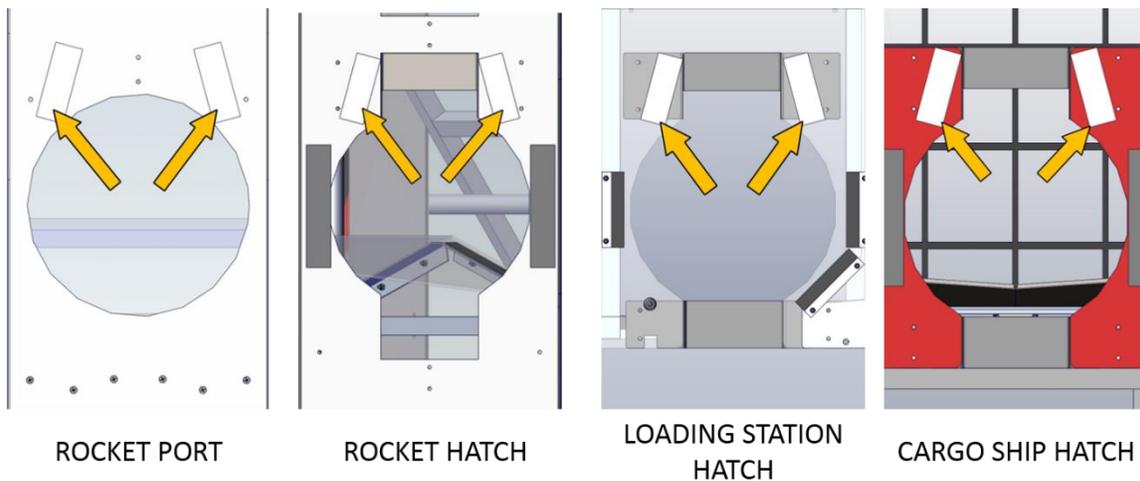


Figure 4-32 Vision targets

4.11 THE FIELD MANAGEMENT SYSTEM

The Field Management System (FMS) is the electronics core responsible for controlling the *FIRST* Robotics Competition playing FIELD. The FMS encompasses all FIELD electronics, including the computers, REFEREE touchscreens, wireless access point, sensors, stack lights, E-Stops, etc.

When a DRIVE TEAM connects the Ethernet cable from their assigned PLAYER STATION to their OPERATOR CONSOLE, the DRIVER Station software on the OPERATOR CONSOLE computer will begin to communicate with the Field Management System (FMS). Once connected to FMS, the only open ports available are described in Table 4-1.



Table 4-1 FMS Ports

Port	Designation	Bi-directional?
UDP/TCP 1180-1190	Camera data from the roboRIO to the Driver Station when the camera is connected the roboRIO via USB	Yes
TCP 1735	SmartDashboard	Yes
UDP 1130	Dashboard-to-ROBOT control data	Yes
UDP 1140	ROBOT-to-Dashboard status data	Yes
HTTP 80	Camera connected via switch on the ROBOT	Yes
HTTP 443	Camera connected via switch on the ROBOT	Yes
UDP/TCP 554	Real-Time Streaming Protocol for h.264 camera streaming	Yes
UDP/TCP 1250	CTRE Diagnostics Server	Yes
UDP/TCP 5800-5810	Team Use	Yes

Teams may use these ports as they wish if they do not employ them as outlined above (e.g. TCP 1180 can be used to pass data back and forth between the ROBOT and the Driver Station software if the team chooses not to use the camera on USB). Note that ROBOT code cannot be deployed while connected to the FMS. Additional information about the FMS may be found in the [FMS Whitepaper](#).

FMS alerts participants to milestones in the MATCH using audio cues. Please note that audio cues are intended to be a courtesy to participants and not intended as official MATCH markers. If there is a discrepancy between an audio cue and the FIELD timers, the FIELD timers are the authority.

- MATCH start (T-minus 150s)
 - SANDSTORMS lowered just prior to MATCH start
 - “Cavalry Charge” audio cue
- SANDSTORM PERIOD ends (T-minus 135s)
 - SANDSTORMS retract
 - “Three Bells” audio cue
- End game warning (T-minus 30s)
 - “Space Station Alert” audio cue
- End game (T-minus 20s)
 - “Train Whistle” audio cue
- MATCH End (T-minus 0s)
 - “Buzzer” audio cue
- MATCH stopped
 - “Foghorn” audio cue

FMS also alerts participants about the state of MATCH progress or FIELD safety with lighting. ROCKETS have red or blue lights in their nosecones which illuminate during a MATCH if that ROCKET has six (6) CARGO and six (6) HATCH PANELS. Once the MATCH is over, and if the Head REFEREE has determined the FIELD is safe for humans, the nosecone lights all turn green.



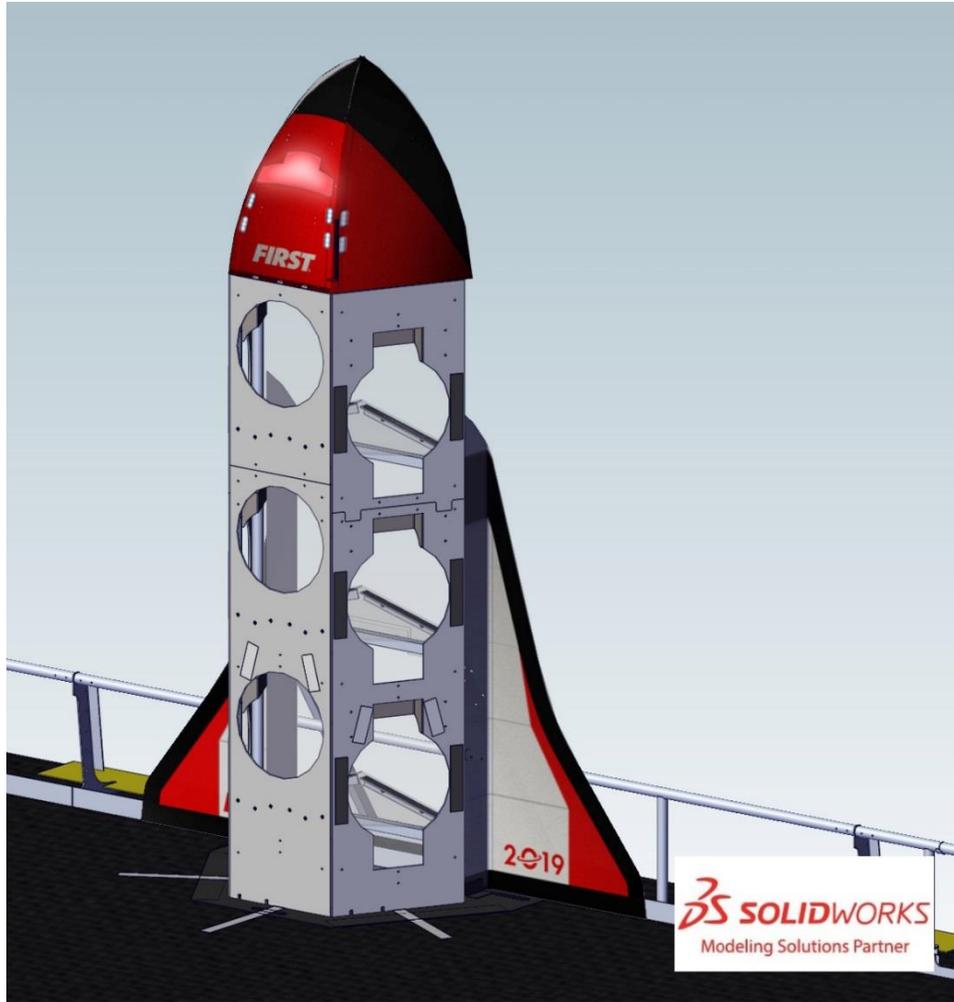


Figure 4-33 Complete Red ROCKET nosecone lit.



5 MATCH PLAY

During each DESTINATION: DEEP SPACE Presented By The Boeing Company MATCH, two (2) ALLIANCES (an ALLIANCE is a cooperative of up to four (4) *FIRST*® Robotics Competition teams) play MATCHES, setup and executed per the details described below.

5.1 SETUP

5.1.1 GAME PIECES

Twenty-four (24) of each GAME PIECE are staged on each side of the ARENA for each MATCH as follows:

- A. one (1) HATCH PANEL is loaded in each of the two (2) LOADING STATIONS,
- B. six (6) CARGO are staged in each of the two (2) DEPOTS,
- C. each of the three (3) teams may preload one (1) HATCH PANEL or one (1) CARGO in their ROBOT such that it is fully supported by that ROBOT, and
- D. remaining HATCH PANELS (quantity 19-22, depending on decisions made in C) and CARGO (quantity 9-12, depending on decisions made in C) are staged in the corresponding ALLIANCE STATIONS, split evenly (or off by one if an odd remainder) between the GAME PIECE Holders.

Additional GAME PIECES are staged as follows:

- E. One (1) CARGO is staged in each of the two (2) ALLIANCE WALL-facing CARGO SHIP BAYS
- F. Each team must prepopulate one (1) CARGO or one (1) Null HATCH PANEL (a HATCH PANEL marked with white tape and hardware installed to secure Null HATCH PANEL to the CARGO SHIP, see drawing GE-19244) in each of their two (2) designated CARGO SHIP BAYS (designated per the MATCH schedule and per Figure 5-2). Nonstaged Null HATCH PANELS and CARGO are excluded from MATCH play. If no team decision, the BAY will be populated with one (1) CARGO. If order placement of GAME PIECES matters to either or both ALLIANCES, the ALLIANCE must notify the Head REFEREE during setup for that MATCH. Upon notification, the Head REFEREE will require ALLIANCES alternate placement of all GAME PIECES. In a Qualification MATCH, GAME PIECES will be placed in the following order: Blue Station 1, Red Station 1, Blue Station 2, Red Station 2, Blue Station 3, Red Station 3. In a PLAYOFF MATCH, the same pattern is applied, but instead of Red ALLIANCE placing last, the higher seeded ALLIANCE (regardless of color) places last.



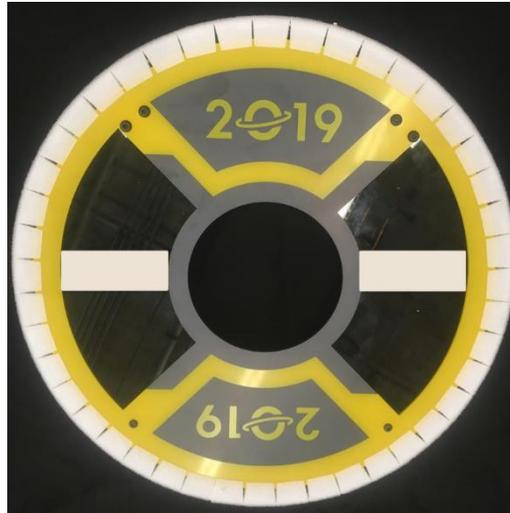


Figure 5-1 Null HATCH PANEL

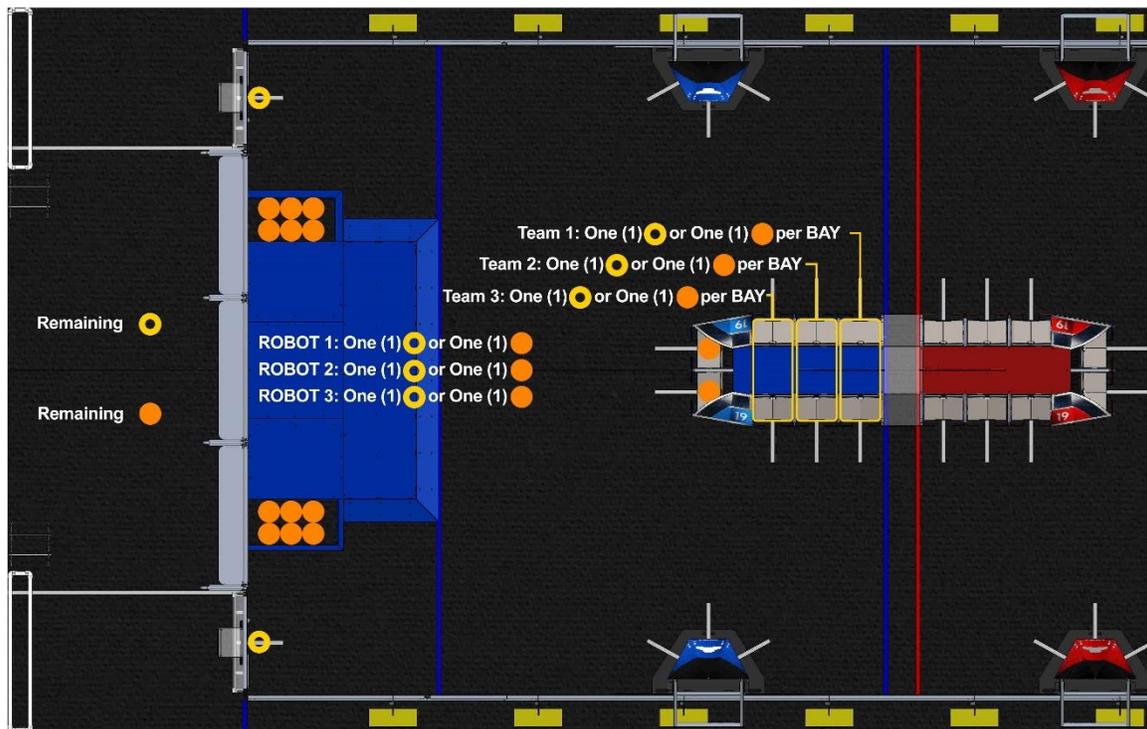


Figure 5-2 GAME PIECE staging (~½-FIELD shown)

5.1.2 ROBOTS

Teams stage their ROBOT on their HAB PLATFORM such that it is fully and only supported by HAB PLATFORM Levels 1 or 2.

If order placement of ROBOTS matters to either or both ALLIANCES, the ALLIANCE must notify the Head REFEREE during setup for that MATCH. Upon notification, the Head REFEREE will require



ALLIANCES alternate placement of all ROBOTS. In a Qualification MATCH, ROBOTS will be placed in the following order: Red Station 1 ROBOT, Blue Station 1 ROBOT, Red Station 2 ROBOT, Blue Station 2 ROBOT, Red Station 3 ROBOT, Blue Station 3 ROBOT. In a PLAYOFF MATCH, the same pattern is applied, but instead of Red ALLIANCE placing, the higher seeded ALLIANCE (regardless of color) will place last.

5.1.3 HUMANS

DRIVERS, COACHES, and HUMAN PLAYERS stage between the STARTING LINES in their ALLIANCE STATION. TECHNICIANS stage in the event-designated area near the FIELD.

5.2 SANDSTORM PERIOD

The SANDSTORM PERIOD is a fifteen (15) second period at the start of each MATCH (T-minus 150s to T-minus 135s), during which the PLAYER STATION is blocked by the SANDSTORM. Teams have the option of their ROBOTS operating autonomously, driving blind, or using visual feedback provided by the ROBOT to navigate the FIELD.

5.3 SCORING

ALLIANCES are rewarded for accomplishing various actions throughout the course of a MATCH, including ROBOT movement while DRIVERS are blind, repairing their ROCKETS by installing HATCH PANELS, loading their space craft with CARGO, returning to their HAB PLATFORM, and winning or tying MATCHES.

Rewards are granted either via MATCH points (which contribute to the ALLIANCE'S MATCH score) or Ranking Points (which increase the measure used to rank teams in the Qualification tournament). Such actions, their criteria for completion, and their point values are listed in Table 5-1. Scores are assessed and updated shortly after the end of the SANDSTORM PERIOD and throughout the rest of the MATCH.

Except for the SANDSTORM bonuses, scores are based on the state of the FIELD when the ARENA timer displays zero. However, if GAME PIECES are in motion when the ARENA timer displays zero (0), GAME PIECE scores are assessed once they come to rest. Additionally, if a ROBOT is in motion when the ARENA timer displays zero (0) or moves immediately after becoming DISABLED, its score is evaluated five (5) seconds after the ARENA timer displays zero (0).

For the purposes of assessing SANDSTORM and HAB Climb Bonuses described in Table 5-1, a ROBOT is considered to have started from, or climbed to, a HAB Level if:

1. the ROBOT'S BUMPERS are fully above the Level's platform and
2. the ROBOT is only supported by:
 - surfaces of the HAB PLATFORM at or above that Level (including transitively through a GAME PIECE),
 - ALLIANCE WALL, and/or
 - another ROBOT which has climbed to that HAB Level or higher

SANDSTORM and HAB Climb Bonuses are evaluated and scored by human REFEREES. Teams are encouraged to make sure that it's obvious and unambiguous that a ROBOT is not being supported by anything below that Level.



Table 5-1 DESTINATION: DEEP SPACE scoring opportunities

Award	Awarded for...	Value
SANDSTORM Bonus 1	each ROBOT whose BUMPERS fully cross the HAB LINE during the SANDSTORM PERIOD.	3
SANDSTORM Bonus 2	Value corresponds to the Level from which the ROBOT started.	6
HATCH PANEL	each HATCH PANEL (excluding Null HATCH PANELS) attached to a ROCKET or CARGO SHIP such that it is fully supported by that ROCKET or CARGO SHIP and via the hook/loop tape (contact by an opponent ROBOT does not count as “support” and does not negate a scored HATCH PANEL). No more than one HATCH PANEL per HATCH will be counted.	2
CARGO	each CARGO partially or completely (regardless of inflation state) in a BAY with a Null HATCH PANEL or scored HATCH PANEL and not in contact with a ROBOT from that ROCKET/CARGO SHIP’S ALLIANCE. No more than one CARGO per BAY will be counted.	3
HAB Climb Bonus: Level 1	each ROBOT which has climbed their HAB PLATFORM (value corresponds to the Level to which the ROBOT has climbed). A ROBOT whose BUMPERS haven’t fully crossed their HAB LINE to leave their HAB ZONE at any point during the MATCH isn’t eligible.	3
HAB Climb Bonus: Level 2		6
HAB Climb Bonus: Level 3		12
HAB Docking	earning at least fifteen (15) HAB Climb Bonus points.	1 Ranking Point
One (1) Complete ROCKET	completing at least one (1) ROCKET with six (6) scored HATCH PANELS and six (6) scored CARGO	1 Ranking Point
Tie	Completing a MATCH with the same number of points as your opponent.	1 Ranking Point
Win	Completing a MATCH with more points than your opponent.	2 Ranking Points

An ALLIANCE can earn up to four (4) Ranking Points (RP) per Qualification MATCH, as described in Table 5-1. There are no RP, or comparable point bonuses, in Playoff MATCHES.

5.4 RULE VIOLATIONS

Upon a rule violation, one or more of the penalties listed in Table 5-2 will be assessed.



Table 5-2 DESTINATION: DEEP SPACE rule violations

Penalty	Description
FOUL	a credit of three (3) points towards the opponent's total score
TECH FOUL	a credit of ten (10) points toward the opponent's total score
YELLOW CARD	a warning issued by the Head REFEREE for egregious ROBOT or team member behavior or rule violations. A subsequent YELLOW CARD within the same tournament phase will lead to a RED CARD.
RED CARD	a penalty assessed for egregious ROBOT or team member behavior or rule violations which results in a team being DISQUALIFIED for the MATCH.
DISABLED	ROBOT is commanded to deactivate all outputs, rendering the ROBOT inoperable for the remainder of the MATCH.
DISQUALIFIED	the state of a team in which they receive zero (0) MATCH points and zero (0) Ranking Points in a Qualification MATCH or causes their ALLIANCE to receive zero (0) MATCH points in a Playoff MATCH

Several rule violations escalate if the REFEREE determines an action was “strategic.” While there’s no official *FIRST* Robotics Competition definition of strategic, generally it’s meant to apply to rule violations that the REFEREE believes are designed or planned to serve a particular purpose or advantage to the ALLIANCE.

Some rule violations escalate if the REFEREE determines an action was “repeated.” While there’s no official *FIRST* Robotics Competition definition of repeated, it’s meant to apply to rule violations that occur more than once within a MATCH.

5.5 DRIVE TEAM

A DRIVE TEAM is a set of up to five (5) people from the same *FIRST* Robotics Competition team responsible for team performance for a specific MATCH. There are four (4) specific roles on a DRIVE TEAM which ALLIANCES can use to assist ROBOTS with DESTINATION: DEEP SPACE.

The intent of the definition of DRIVE TEAM and DRIVE TEAM related rules is that, barring extenuating circumstances, the DRIVE TEAM consists of people who arrived at the event affiliated with that team and are responsible for their team’s and ROBOT’S performance at the event (this means a person may be affiliated with more than one (1) team). The intent is not to allow teams to “adopt” members of other teams for strategic advantage for the loaning team, borrowing team, and/or their ALLIANCE (e.g. an Alliance Captain believes one of their DRIVERS has more experience than a DRIVER on their 1st pick, and the teams agree the 1st pick team will “adopt” that DRIVER and make them a member of their DRIVER TEAM for Playoffs).

The definition isn’t stricter for two main reasons. First, to avoid additional bureaucratic burden on teams and event volunteers (e.g. requiring that teams submit official rosters that queuing must check before allowing a DRIVE TEAM in to the ARENA). Second, to provide space for exceptional circumstances that give teams the opportunity to display Gracious Professionalism (e.g. a bus is delayed, a COACH has no DRIVERS, and their pit neighbors agree to help by loaning student DRIVERS as temporary members of the team until their bus arrives).



Table 5-3 DRIVE TEAM roles

Role	Description	Max./ DRIVE TEAM	Criteria
COACH	a guide or advisor	1	Pre-college student or adult mentor Must wear “COACH” button
DRIVER	an operator and controller of the ROBOT	3	Pre-college student Must wear one (1) of the three (3) “DRIVE TEAM” buttons
HUMAN PLAYER	a GAME PIECE manager		
TECHNICIAN	a resource for ROBOT troubleshooting, setup, and removal from the FIELD	1	Pre-college student Must wear “TECHNICIAN” button

The TECHNICIAN provides teams with a technical resource for pre-MATCH setup, ROBOT connectivity, OPERATOR CONSOLE troubleshooting, and post-MATCH removal of the ROBOT. Some pre-MATCH responsibilities for the TECHNICIAN may include, but are not limited to:

- location of the ROBOT radio, its power connection, and understanding of its indicator lights
- location of the roboRIO and understanding of its indicator lights
- username and password for the OPERATOR CONSOLE
- restarting the DRIVER Station and Dashboard software on the OPERATOR CONSOLE
- changing the bandwidth utilization (e.g. camera resolution, frame rate, etc.)
- changing a battery
- charging pneumatics

While the TECHNICIAN may be the primary technical member of the DRIVE TEAM, all members of the DRIVE TEAM are encouraged to have knowledge of the basic functionality of the ROBOT, such as the location and operation of the main circuit breaker, connecting and resetting joysticks or gamepads from the OPERATOR CONSOLE, and removing the ROBOT from the HAB PLATFORM.

5.6 OTHER LOGISTICS

GAME PIECES that leave the FIELD are placed back into the FIELD approximately at the point of exit by FIELD STAFF (REFEREES, FTAS, or other staff working around the FIELD) at the earliest safe opportunity.

Note that ROBOTS may not deliberately cause GAME PIECES to leave the FIELD (see G7).

An ARENA FAULT will not be called for MATCHES that accidentally begin with an incorrect number of, incorrectly positioned, or damaged GAME PIECES. Damaged GAME PIECES will not be replaced until the next FIELD reset period. DRIVE TEAMS should alert the FIELD STAFF to any missing or damaged GAME PIECES prior to the start of the MATCH.

Once the MATCH is over and the Head REFEREE determines that the FIELD is safe for FIELD STAFF and DRIVE TEAMS, they or their designee will change the LED lights to green and DRIVE TEAMS may retrieve their ROBOT in accordance with S2.

In addition to the two (2) minutes and thirty (30) seconds of game play, each MATCH also has pre- and post-MATCH time for setup and reset of the ARENA. During ARENA reset, the ARENA is cleared of ROBOTS and OPERATOR CONSOLES from the MATCH that just ended. The ROBOTS and





OPERATOR CONSOLES for the subsequent MATCH are loaded into the ARENA by DRIVE TEAMS at this time. FIELD STAFF also use this time to reset ARENA elements and GAME PIECES.



6 SAFETY RULES

Safety is paramount at all times, and each rule below is intended to establish norms at each event that will mitigate injury risk to all participants.

Event staff have the final decision authority for all safety-related issues within a venue.

Veterans of the *FIRST*® Robotics Competition may notice the absence of some long-standing rules from this section, e.g. the requirements for safety glasses, closed-toed shoes, and limitations on the wireless use of ROBOTS. These rules remain enforced for the 2019 DESTINATION: DEEP SPACE Presented By The Boeing Company season, but live with other event rules on the [FIRST Robotics Competition Event Experience web page](#) because they are not specific to the game or limited to MATCH play. As with all violations in this document, any of the Event Experience rules also carry the consequence of a YELLOW or RED CARD.

S1. Dangerous ROBOTS: not allowed. ROBOTS whose operation or design is dangerous or unsafe are not permitted.

Violation: If before the MATCH, the offending ROBOT will not be allowed to participate in the MATCH. If during the MATCH, the offending ROBOT will be DISABLED.

Examples include, but are not limited to:

- Uncontrolled motion that cannot be stopped by the DRIVE TEAM
- ROBOT parts “flailing” outside of the FIELD
- ROBOTS dragging their battery
- ROBOTS that consistently extend beyond the FIELD

S2. Wait for the green lights. Team members may only enter the FIELD if the ROCKET’S nosecone LEDs are green, unless explicitly instructed by a REFEREE or an FTA.

Violation: Verbal warning. If repeated at any point during the event, YELLOW CARD. If egregious, RED CARD.

S3. Never step/jump over the guardrail. Team members may only enter or exit the FIELD through open gates.

Violation: Verbal warning. If repeated at any point during the event, YELLOW CARD. If egregious, RED CARD.

Teams are encouraged to ensure that all members of their DRIVE TEAM are aware of this rule. It’s easy to violate, particularly when teams are doing their best to move on and off the FIELD quickly. The violations of S3 are intended to avoid nuisance penalties, but still enforce safety requirements around the FIELD. There is the potential for injury when stepping over the guardrail.

Violations of S3 apply to the entire team, not specifically to any one individual. For example, a member of team 9999 steps over the guardrail prior to MATCH 3, and a different member steps over the guardrail prior to MATCH 25. The team receives a verbal warning for the first violation and a YELLOW CARD for the second. Jumping over the guardrail is considered an egregious violation of S3.

S4. Humans, stay off the FIELD during the MATCH. DRIVE TEAMS may not extend any body part into the FIELD during the MATCH.



Violation: YELLOW CARD

Examples of egregious violations that are likely to escalate the Violation to a RED CARD include, but are not limited to, walking onto the FIELD during a MATCH or reaching into the FIELD and grabbing a ROBOT during a MATCH.

S5. ROBOTS, stay on the FIELD during the MATCH. ROBOTS and anything they control, e.g. a GAME PIECE, may not contact anything outside the FIELD with the exception of brief incursions inside the CARGO Chute.

Violation: Offending ROBOT will be DISABLED.

Please be conscious of REFEREES and FIELD STAFF working around the ARENA who may be in close proximity to your ROBOT.

S6. Stay out of the Chutes. DRIVE TEAMS may not extend any body part into the CARGO Chute. Momentary encroachment into the Chute is an exception to this rule.

Violation: FOUL.



7 CONDUCT RULES

C1. Egregious or exceptional violations. In addition to rule violations explicitly listed in this manual and witnessed by a REFEREE, the Head REFEREE may assign a YELLOW or RED CARD for egregious ROBOT actions or team member behavior at the event. This includes violations of the event rules found on the [FIRST® Robotics Competition Event Experience web page](#). Please see the [Yellow and RED CARDS](#) section for additional detail.

C2. Be a good person. All teams must be civil toward their team members, other team members, competition personnel, FIELD STAFF, and event attendees while at a FIRST® Robotics Competition event.

Violation: Behavior will be discussed with team or individual. Violations of this rule are likely to escalate to YELLOW or RED CARDS rapidly (i.e. the threshold for egregious or repeated violations is relatively low.)

Examples of inappropriate behavior include, but are not limited to, use of offensive language or other uncivil conduct.

We've learned that, although intended with no ill will, "clothes pinning" (a game played by some event participants where they try to clip a clothespin to an unsuspecting person) can and does make people uncomfortable. Understandable; it's unwelcome contact that may or may not have been from someone you know and trust. As a result, this is considered an example of uncivil conduct.

The activity known as 'the circle game' uses hand signals that can be negatively interpreted. As such, this game is considered an example of uncivil conduct.

C3. Asking other teams to throw a MATCH – not cool. A team may not encourage an ALLIANCE, of which it is not a member, to play beneath its ability.

NOTE: This rule is not intended to prevent an ALLIANCE from planning and/or executing its own strategy in a specific MATCH in which all the teams are members of the ALLIANCE.

Violation: Behavior will be discussed with team or individual. Violations of this rule are likely to escalate rapidly to YELLOW or RED CARDS and may lead to dismissal from the event (i.e. the threshold for egregious or repeated violations is relatively low.)

Example 1: A MATCH is being played by Teams A, B, and C, in which Team C is encouraged by Team D to not return to the HAB at the end of the MATCH, resulting in Teams A, B, and C not being able to earn a HAB Docking Ranking Point. Team D's motivation for this behavior is to prevent Team A from rising in the Tournament rankings and negatively affecting Team D's ranking.

Example 2: A MATCH is being played by Teams A, B, and C, in which Team A is assigned to participate as a SURROGATE. Team D encourages Team A to not participate in the MATCH so that Team D gains ranking position over Teams B and C.

FIRST® considers the action of a team influencing another team to throw a MATCH, to deliberately miss Ranking Points, etc. incompatible with FIRST values and not a strategy any team should employ.

C4. Letting someone coerce you in to throwing a MATCH – also not cool. A team, as the result of encouragement by a team not on their ALLIANCE, may not play beneath its ability.



NOTE: This rule is not intended to prevent an ALLIANCE from planning and/or executing its own strategy in a specific MATCH in which all the ALLIANCE members are participants.

Violation: Behavior will be discussed with team or individual. Violations of this rule are likely to escalate rapidly to YELLOW or RED CARDS and may lead to dismissal from the event (i.e. the threshold for egregious or repeated violations is relatively low.)

Example 1: A MATCH is being played by Teams A, B, and C. Team D requests Team C to not return to the HAB at the end of the MATCH, resulting in Teams A, B, and C not being able to earn a Hab Docking Ranking Point. Team C accepts this request from Team D. Team D's motivation for this behavior is to prevent Team A from rising in the Tournament rankings negatively affecting Team D's ranking.

Example 2: A MATCH is being played by Teams A, B, and C, in which Team A is assigned to participate as a SURROGATE. Team A accepts Team D's request to not participate in the MATCH so that Team D gains ranking position over Teams B and C.

FIRST considers the action of a team influencing another team to throw a MATCH, to deliberately miss Ranking Points, etc. incompatible with *FIRST* values and not a strategy any team should employ.

- C5. Compete with only one (1) ROBOT.** Each registered *FIRST* Robotics Competition team may enter only one (1) ROBOT (or 'ROBOT', which to a reasonably astute observer, is a ROBOT built to play DESTINATION: DEEP SPACE) into the 2019 *FIRST* Robotics Competition Season.

"Entering" a ROBOT (or ROBOT) into a *FIRST* Robotics Competition means bringing it to the event such that it's an aid to your team (e.g. for spare parts, judging material, or for practice). Spare FABRICATED ITEMS may be brought to the event in a bag or part of a WITHHOLDING ALLOWANCE.

This rule does not prohibit teams from bringing in ROBOTS from other *FIRST* programs for the purposes of awards presentations or pit displays.

Violation: Verbal warning. Repeated violations at any point during the event will be addressed by the Head REFEREE, the Lead ROBOT Inspector and/or Event Management.

- C6. Show up to your MATCHES.** Each team must send at least one (1) member of its DRIVE TEAM to the ARENA and participate in each of the team's assigned Qualification and Playoff MATCHES. The team should inform the Lead Queuer if the team's ROBOT is not able to participate.

Violation: If ROBOT has passed an initial, complete Inspection, RED CARD. If ROBOT has not passed an initial, complete Inspection, DISQUALIFIED per I2.



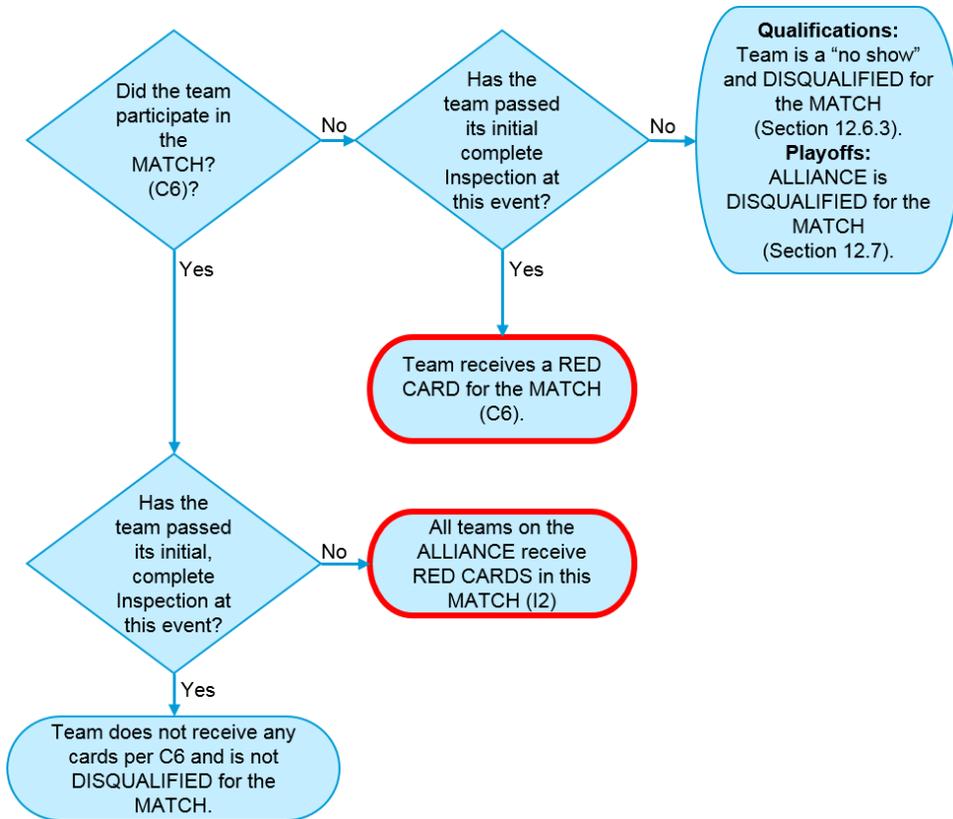


Figure 7-1 MATCH participation flowchart

C7. Be prompt/safe when coming to and going from the FIELD. DRIVE TEAMS may not cause significant or repeated delays (during the event) to the start of a MATCH and/or to the FIELD reset after the MATCH.

Violation: If prior to the MATCH, the offending DRIVE TEAM'S ROBOT will be DISABLED. If after the MATCH, YELLOW CARD.

DRIVE TEAMS are expected to stage their ROBOTS for a MATCH, and remove it from the FIELD afterwards, safely and swiftly. Examples include, but are not limited to:

- a. late arrival to the FIELD
- b. failing to exit the FIELD once the ROCKET'S nosecone green LEDs have turned off (indicating MATCH ready)
- c. installing BUMPERS, charging pneumatic systems, or any other ROBOT maintenance, once on the FIELD
- d. use of alignment devices that are external to the ROBOT (e.g. a DRIVE TEAM could bring and use a measuring tape, as long as there is no delay to the MATCH by doing so)
- e. failing to remove OPERATING CONSOLES from the PLAYER STATIONS in a timely manner

C8. Don't expect to gain by doing others harm. Strategies clearly aimed at forcing the opposing ALLIANCE to violate a rule are not in the spirit of FIRST Robotics Competition and not allowed. Rule violations forced in this manner will not result in an assignment of a penalty to the targeted ALLIANCE.



Violation: FOUL. If egregious or repeated during the MATCH, YELLOW CARD.

C8 does not apply for strategies consistent with standard gameplay, for example:

- a. causing an opponent ROBOT to contact your ROCKET during the last few seconds of a MATCH while in the process of trying to place a HATCH PANEL.
- b. contacting an opponent ROBOT while in your HAB ZONE while trying to retrieve CARGO from your DEPOT.

C8 requires an intentional act with limited or no opportunity for the TEAM being acted on to avoid the penalty, such as:

- c. placing a HATCH PANEL on/in an opponent who's already controlling a GAME PIECE such that they cannot help but violate G4.
- d. pushing an opponent ROBOT against your ROCKET during the final twenty (20) seconds of the MATCH for the sole purpose of making them violate G16.

- C9. One student, one Head REFEREE.** A team may only send one (1) pre-college student from its DRIVE TEAM to address the Head REFEREE.

Violation: The Head REFEREE will not address additional, non-compliant team members or peripheral conversations.

Please see the [REFEREE Interaction](#) section for more information about process and expectations.

- C10. Plug in to/be in your PLAYER STATION.** The OPERATOR CONSOLE must be used in the PLAYER STATION to which the team is assigned, as indicated on the team sign.

Violation: The MATCH will not start until the situation is corrected. If during a MATCH, DISABLED.

One intent of C10 is to prevent unsafe situations where long tethers to OPERATOR CONSOLE devices increase tripping hazards as the operator moves about the ALLIANCE STATION. In the interest of avoiding nuisance penalties associated with an operator stepping outside of a prescribed area, we prefer to offer a general guideline as to what it means to use the OPERATOR CONSOLE in the ALLIANCE STATION. Provided the operator is within close proximity of their PLAYER STATION, there will be no repercussions. However, if an operator is located more than approximately $\frac{1}{2}$ PLAYER STATION width away from their own PLAYER STATION, that would be considered a violation of C10.

- C11. Work in designated areas only.** Throughout the event, from load-in to load-out, teams may only produce FABRICATED ITEMS during pit hours, and:

- A. in their pit area,
- B. in other teams' pit areas with permission from that team,
- C. while Queued for a MATCH or Practice FIELD,

Please note that given likely tight quarters, extra scrutiny regarding safety is required.

- D. any area designated by Event Staff (e.g. Playoff Pit Area, etc.), or
- E. as permitted at provided machine shops that are available to all teams.

Violation: Verbal warning. Repeated at any point during the event or egregious violations will be addressed by the Head REFEREE, the Lead ROBOT Inspector and/or Event Management.



8 GAME RULES: ROBOTS

8.1 BEFORE/AFTER THE MATCH

- G1. Know your ROBOT setup.** When placed on the FIELD for a MATCH, each ROBOT must be:
- A. in compliance with all ROBOT rules, i.e. has passed Inspection (for exceptions regarding Practice MATCHES, see the [Inspection & Eligibility Rules](#) section),
 - B. the only item left on the FIELD by the DRIVE TEAM,
 - C. confined to its STARTING CONFIGURATION,
 - D. set on their HAB PLATFORM, and
 - E. supporting not more than one (1) GAME PIECE (as described in the [Setup](#) section).

Violation: If fix is a quick remedy, the MATCH won't start until all requirements are met. If it is not a quick remedy the offending ROBOT will be DISABLED and, at the discretion of the Head REFEREE, must be re-inspected.

If a ROBOT is BYPASSED prior to the start of the MATCH, the DRIVE TEAM may not remove the ROBOT from the FIELD without permission from the Head REFEREE or the FIRST Technical Advisor (FTA).

- G2. ROBOTS must be removed from the FIELD by hand (i.e. no enabling, power, etc.).** ROBOTS will not be re-enabled after the conclusion of the MATCH, nor will teams be permitted to tether to the ROBOT except in special circumstances (e.g. during TIMEOUTS, after Opening Ceremonies, before an immediate MATCH replay, etc.) and with the express permission from the FTA or a REFEREE.

Violation: YELLOW CARD.

Tethering includes any wired or wireless connection used to electrically energize and/or control elements on the ROBOT. The safety of teams and volunteers in close proximity to ROBOTS and ARENA elements on the FIELD is of the utmost importance, therefore ROBOTS or ROBOT COMPONENTS may not be energized or powered in any way on the FIELD once the MATCH has concluded.

Keep in mind that ROBOTS need to be safely transported off the FIELD and back to the pits after the MATCH, and there may be bystanders, doorways or height restrictions along the route.

8.2 DURING THE MATCH

8.2.1 ONLY DURING THE SANDSTORM PERIOD

- G3. No defense.** During the SANDSTORM PERIOD, a ROBOT may not cross the FIELD such that its BUMPERS break the plane defined by their opponent's CARGO SHIP LINE.

Violation: TECH FOUL

8.2.2 GAME PIECE INTERACTION

- G4. One GAME PIECE at a time.** ROBOTS may not have greater-than-momentary or repeated control, i.e. exercise greater-than-momentary or repeated influence, of more than one (1) GAME PIECE at a time, either directly or transitively through other objects. A GAME PIECE that is at least partially supported by a ROCKET or CARGO SHIP is not considered controlled by the ROBOT.

Violation: FOUL per additional GAME PIECE. If strategic, YELLOW CARD.



If a GAME PIECE becomes lodged in or on a ROBOT, it is considered controlled by the ROBOT. It is important to design your ROBOT so that it is impossible to inadvertently or unintentionally control more than the allowed maximum.

Example 1: If a ROBOT controls two (2) GAME PIECES and then releases them all in a way that both GAME PIECES are in scoring position, the team is issued a YELLOW CARD.

Example 2: If a CARGO is stuck on a ROBOT and that ROBOT picks up a HATCH PANEL, they are issued a FOUL per G4. If they place that HATCH PANEL and then pick up another HATCH PANEL, they are issued another FOUL. Continuing game play in this manner (i.e. not taking advantage of carrying more than one (1) GAME PIECE) would generally not be considered a strategic violation.

Example 3: A ROBOT controlling one (1) GAME PIECE that briefly contacts several CARGO in close proximity causing them to scatter would generally not be considered in violation of G4.

- G5. Don't mess with opponents' scored GAME PIECES.** A ROBOT may not remove a GAME PIECE from an opponents' ROCKET/CARGO SHIP. GAME PIECES which become dislodged because of incidental contact with the ROCKET/CARGO SHIP are not considered a violation of this rule.

Violation: FOUL per GAME PIECE de-scored and opponents are awarded one (1) Complete ROCKET Ranking Point if neither of their ROCKETS are completed at T-minus 0s.

- G6. No throwing HATCH PANELS.** ROBOTS may not shoot HATCH PANELS into the air in a way that's prohibited in R6, kick them across the floor using an active MECHANISM, or eject them across the floor in a forceful way (i.e. HATCH PANEL is caused to move a significant distance).

Violation: RED CARD.

- G7. Keep GAME PIECES in bounds.** ROBOTS may not intentionally eject GAME PIECES from the FIELD.

Violation: FOUL per GAME PIECE.

- G8. GAME PIECES: use as directed.** ROBOTS may not deliberately use GAME PIECES in an attempt to ease or amplify the challenge associated with FIELD elements.

Violation: FOUL per GAME PIECE. Repeated at any point during the event or egregious violations of this rule are likely to escalate rapidly to YELLOW or RED CARDS.

Examples include, but are not limited to:

- a. stacking HATCH PANELS to decrease the rise of the HAB PLATFORM steps
- b. corralling CARGO in front of an opponent's LOADING STATION to make it harder for them to retrieve GAME PIECES

8.2.3 ZONE SPECIFIC RESTRICTIONS

- G9. One (1) defender at a time.** No more than one ROBOT may be positioned such that its BUMPERS break the plane defined by or are completely beyond the opponent's CARGO SHIP LINE.

The exception to this rule is if an additional ROBOT



- A. is forced to cross the opponent's CARGO SHIP LINE by an opponent ROBOT (e.g. it is pushed over the opponent's CARGO SHIP LINE by an opponent in a defensive effort to prevent them from scoring a CARGO in a ROCKET), and
- B. makes a dedicated effort to cross back over the CARGO SHIP LINE until no more than one ROBOT is positioned such that its BUMPERS break the plane defined by or are completely beyond the opponent's CARGO SHIP LINE.

Violation: FOUL, plus an additional FOUL for every five (5) seconds in which the situation is not corrected. If G10 is also being violated, additional FOUL escalates to TECH FOUL.

Only one (1) 'five-count' will be maintained at a time for G9, G10, and G18. For violations of G9/G10, the first count started will be maintained and a FOUL or TECH FOUL will be assessed at each five-second interval depending on whether one or both rules are being violated. If G18 is also violated, REFEREES are instructed to disregard G9/G10 counts to focus on the pin. Attempts to intentionally manipulate this in order to avoid G9/G10 penalties may be subject to YELLOW/RED CARDS for egregious behavior.

- G10. On defense, rein it in.** No part of a ROBOT, except its BUMPERS, may be outside its FRAME PERIMETER if its BUMPERS are completely beyond its opponent's CARGO SHIP LINE.

The exception to this rule is if the ROBOT

- A. is forced to cross the opponent's CARGO SHIP LINE by an opponent ROBOT (e.g. it is pushed over the opponent's CARGO SHIP LINE by an opponent in a defensive effort to prevent them from scoring a CARGO in a ROCKET), and
- B. makes a dedicated effort to reposition itself such that
 - i. its BUMPERS are not completely beyond its opponent's CARGO SHIP LINE or
 - ii. the ROBOT is contained to its FRAME PERIMETER.

Violation: FOUL, plus an additional FOUL for every five (5) seconds in which the situation is not corrected. If G9 is also being violated, additional FOUL escalates to TECH FOUL.

- G11. No throwing CARGO on defense.** A ROBOT with its BUMPERS breaking the plane defined by or completely beyond the opponent's CARGO SHIP LINE may not shoot CARGO into the air, kick it across the floor using an active MECHANISM, or eject it across the floor in a forceful way (i.e. CARGO is propelled a significant distance).

Violation: FOUL per CARGO.

- G12. Duck in the HAB ZONES.** A ROBOT with its BUMPERS fully in either HAB ZONE may not extend above the ALLIANCE STATION WALL, i.e. more than 6 ft. 6 in. (~198 cm) above the carpet.

Violation: FOUL. If repeated in a MATCH or while climbing the HAB PLATFORM, YELLOW CARD.



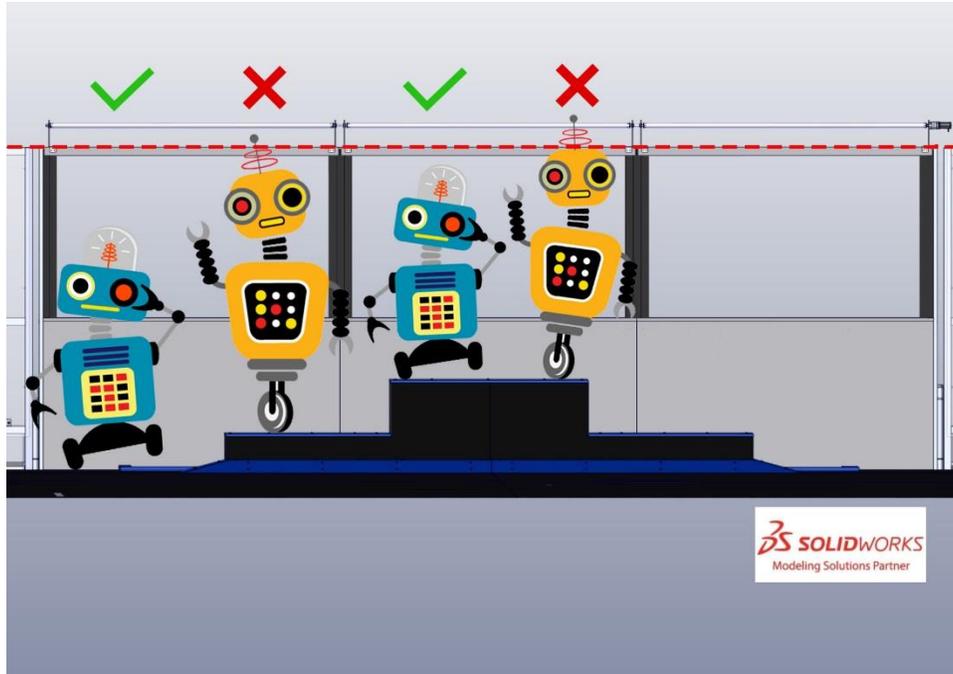


Figure 8-1 ROBOT height limitations in the HAB ZONE

G13. Opponents in their HAB ZONE are off-limits. A ROBOT may not contact an opponent ROBOT if that opponent ROBOT'S BUMPERS are fully in their HAB ZONE.

Violation: FOUL. If this violation occurs during the last 30 seconds of the MATCH, the contacted opponent ROBOT, and all partner ROBOTS it's fully supporting, are considered to have CLIMBED to LEVEL 3 at the end of the MATCH.

G14. Don't climb on each other unless in the HAB ZONE. A ROBOT may not be fully supported by a partner ROBOT unless the supporting ROBOT is at least partially in its HAB ZONE.

Violation: YELLOW CARD.

8.2.4 FIELD INTERACTION

G15. Be careful about what you interact with. DRIVE TEAMS, ROBOTS, and OPERATOR CONSOLES are prohibited from the following actions with regards to interaction with ARENA elements. Items A-D exclude GAME PIECES and the HAB PLATFORM.

- A. Grabbing (excluding DRIVE TEAM interaction with ARENA elements in their areas)
- B. Grasping (excluding DRIVE TEAM interaction with ARENA elements in their areas)
- C. Attaching (including the use of hook tape to anchor to the FIELD carpet and excluding use of the PLAYER STATION hook-and-loop tape, plugging in to the provided power outlet, and plugging the provided Ethernet cable in to the OPERATOR CONSOLE)
- D. Hanging
- E. Deforming
- F. Becoming entangled
- G. Damaging
- H. Repositioning GAME PIECE holders (incidental movement where their general position is unchanged is an exception)



Violation: If prior to MATCH, and situation can be corrected quickly, it must be remedied before the MATCH will start. If during a MATCH, FOUL. If during a MATCH and extended or repeated, YELLOW CARD. If offense is via a ROBOT and the Head REFEREE determines that further damage is likely to occur, offending ROBOT will be DISABLED. Corrective action (such as eliminating sharp edges, removing the damaging MECHANISM, and/or re-Inspection) may be required before the ROBOT will be allowed to compete in subsequent MATCHES.

GAME PIECES are expected to undergo a reasonable amount of wear and tear as they are handled by ROBOTS, such as scratching or marking. Gouging, tearing off pieces, popping, or routinely marking GAME PIECES are violations of this rule. Materials that aggressively wear or leave behind residue or debris on the HATCH PANEL'S loop tape may hinder the natural behavior of the loop tape and thus violate G15. Humans causing GAME PIECE wear and tear, e.g. deforming a CARGO, are subject to a CARD per C1.

There are no rules that prohibit contact with the SANDSTORM'S black out material, however contact that prevents the SANDSTORM from working properly (e.g. retracting at T-minus 135s) is considered damaging and a violation of G15.

- G16. Don't touch opponents' ROCKETS at the end of the MATCH.** During Qualification MATCHES, ROBOTS may not contact opponents' ROCKETS starting at T-minus 20s. Incidental contact, i.e. unintentional contact where opponents' actions are not impeded (e.g. minor contact while driving by the ROCKET), is an exception to this rule.

Violation: FOUL and opponents are awarded one (1) Complete ROCKET Ranking Point if neither of their ROCKETS are completed at T-minus 0s.

8.2.5 ROBOT TO ROBOT INTERACTION

- G17. If an opponent's down, back off.** Fallen (i.e. tipped over) ROBOTS attempting to right themselves (either by themselves or with assistance from a partner ROBOT) have one ten (10) second grace period in which they may not be contacted by an opponent ROBOT. This protection lasts for either ten (10) seconds or until the protected ROBOT has completed the righting operation, whichever comes first.

Violation: FOUL. If intentional, YELLOW CARD.

- G18. There's a 5-count on pins.** ROBOTS may not pin an opponent's ROBOT for more than five (5) seconds. A ROBOT will be considered pinned until the ROBOTS have separated by at least six (6) feet. The pinning ROBOT(s) must then wait for at least three (3) seconds before attempting to pin the same ROBOT again. Pinning is transitive through other objects. If the pinned ROBOT chases the pinning ROBOT upon retreat, the pinning ROBOT will not be penalized, and the pin will be considered complete.

Violation: FOUL, plus an additional FOUL for every five (5) seconds in which the situation is not corrected. If G9 and/or G10 are also being violated, additional FOUL escalates to TECH FOUL. If extended, RED CARD.

There is no *FIRST* Robotics Competition specific definition of pin, so a general definition applies; "to prevent or stop something from moving." As a result, contact is not required for pinning to occur.

For example, a Red ROBOT parked such that a Blue ROBOT is against its Blue ROCKET and the Red CARGO SHIP LINE (while the opponent's partner is already on defense per G9) could be considered pinning because the opponent ROBOT cannot cross the Red CARGO SHIP LINE without violating G9.



Generally, pins that exceed fifteen (15) seconds are considered extended, regardless of a pinning ROBOT's mobility.

G19. Don't tear others down to lift yourself up. Strategies aimed at the destruction or inhibition of ROBOTS via attachment, damage, tipping, or entanglements are not allowed.

Violation: TECH FOUL and YELLOW CARD. If harm or incapacitation occurs as a result of the strategy, RED CARD

For example, use of a wedge-like MECHANISM to tip ROBOTS is a violation of G19. MECHANISMS outside the FRAME PERIMETER are particularly susceptible to causing such damage, drawing this penalty, and/or drawing penalties associated with violations of G19.

Teams are encouraged to be cautious in their use of such MECHANISMS when engaging in ROBOT to ROBOT MATCH play.

G20. Stay out of other ROBOTS. Initiating deliberate or damaging contact with an opponent ROBOT on or inside the vertical extension of its FRAME PERIMETER, including transitively through a GAME PIECE, is not allowed.

Violation: TECH FOUL and YELLOW CARD.

High speed accidental collisions may occur during the MATCH and are expected. Generally, ROBOTS extend elements outside of the FRAME PERIMETER at their own risk.

A ROBOT with an element outside its FRAME PERIMETER may be penalized under G20 if it appears they are using that element to purposefully contact another ROBOT inside its FRAME PERIMETER.

The "deliberate or damaging" clause in G20 refers specifically to whether the actual contact within/on an opponent's FRAME PERIMETER is deliberate or damaging, not with any actions/game play/intentions leading up to that contact.

Generally, if, in the judgement of the REFEREE, contact on/within a ROBOT'S FRAME PERIMETER is neither deliberate nor damaging, G20 is not violated. Examples include

- a ROBOT hits an opponent to move it away from its ROCKET and tilts in a way that part of it swings, accidentally in the REFEREE'S judgement, in to an opponent's FRAME PERIMETER and makes contact but causes no damage.
- a ROBOT tries to push an opponent by hitting them on their BUMPER, but because of the impact, accidentally (in the REFEREE'S judgement) rolls on top of them such that their wheels are in contact with elements inside the opponent's FRAME PERIMETER but causes no damage.

An example of a violation of G20 is if a ROBOT reaches inside an opponent's FRAME PERIMETER and uses their arm to hit the opponent's gripper to make the opponent drop their GAME PIECE.

8.2.6 ROBOT RESTRICTIONS

G21. Keep it together. ROBOTS may not intentionally detach or leave parts on the FIELD.

Violation: RED CARD



This rule is not intended to penalize ROBOTS that encounter accidental breakage (e.g. a failed MECHANISM that falls off), as those actions are not intentional.

- G22. Keep your BUMPERS together.** BUMPERS may not fail such that a segment completely detaches, any side of a ROBOT's FRAME PERIMETER is exposed, or the team number or ALLIANCE color are indeterminate.

Violation: DISABLED.

- G23. Keep your BUMPERS low.** BUMPERS must be in the BUMPER ZONE (see R25) during the MATCH unless a ROBOT is completely in its HAB ZONE or supported by a ROBOT completely in its HAB ZONE. A ROBOT is "completely in its HAB ZONE" if its BUMPERS are entirely between its ALLIANCE WALL and the vertical plane defined by its HAB LINE.

Violation: FOUL. If strategic, RED CARD.

An example of a strategic violation of G23 includes, but is not limited to, hitting other ROBOTS with the ROBOT frame.

- G24. Don't overextend yourself.** ROBOTS may not extend more than 30 in (~76 cm). beyond their FRAME PERIMETER (see Figure 8-2).

Violation: FOUL. If strategic (e.g. expansion results in scoring a GAME PIECE), RED CARD.

Examples of compliance and non-compliance of G24 are shown in Figure 8-2.

Yellow bars represent the limits of the FRAME PERIMETER and are drawn in the same orientation of the ROBOT'S FRAME PERIMETER. Green bars represent a measured extension from the FRAME PERIMETER that has not been exceeded. Red bars represent a measured extension from the FRAME PERIMETER that has exceeded the limit in G24). ROBOTS A and C violate G24, whereas ROBOT B does not.

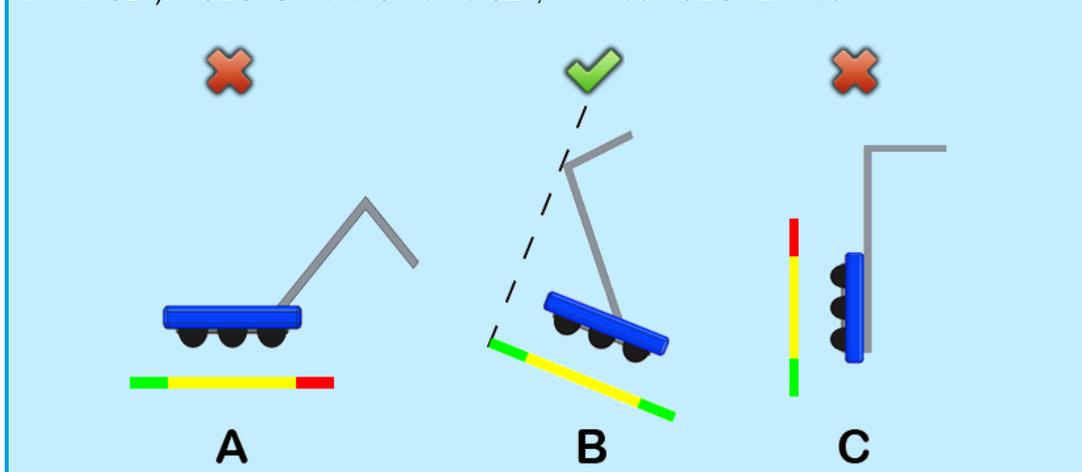


Figure 8-2 Examples of G24 compliance and non-compliance.



9 GAME RULES: HUMANS

9.1 BEFORE THE MATCH

H1. You can't bring/use anything you want. The only equipment that may be brought to the ARENA and used by DRIVE TEAMS during a MATCH is listed below. Regardless if equipment fits criteria below, it may not be employed in a way that breaks any other rules, introduces a safety hazard (e.g. a step stool or large signaling device in the confined space of the ALLIANCE STATION are safety concerns), blocks visibility for FIELD STAFF or audience members, or jams or interferes with the remote sensing capabilities of another team, or the FIELD, including vision systems, acoustic range finders, sonars, infrared proximity detectors, etc. (e.g. including imagery that, to a reasonably astute observer, mimics the Vision Targets used on the FIELD).

- A. the OPERATOR CONSOLE,
- B. non-powered signaling devices,
- C. reasonable decorative items,
- D. special clothing and/or equipment required due to a disability,
- E. devices used solely for planning or tracking strategy,
- F. devices used solely to record gameplay,
- G. non-powered Personal Protective Equipment (examples include, but aren't limited to, gloves, eye protection, and hearing protection)

Items brought to the ARENA under allowances B-G must meet all of the following conditions:

- i. do not connect or attach to the OPERATOR CONSOLE
- ii. do not connect or attach to the FIELD or ARENA
- iii. do not connect or attach to another ALLIANCE member (other than items in category G)
- iv. do not communicate with anything or anyone outside of the ARENA.
- v. do not communicate with the TECHNICIAN
- vi. do not include any form of enabled wireless electronic communication (e.g. radios, walkie-talkies, cell phones, Bluetooth communications, Wi-Fi, etc.)
- vii. do not in any way affect the outcome of a MATCH, other than by allowing the DRIVE TEAM to plan or track strategy for the purposes of communication of that strategy to other ALLIANCE members or use items allowed per part B to communicate with the ROBOT.
- viii.

Violation: MATCH will not start until situation remedied. If discovered or used inappropriately during a MATCH, YELLOW CARD.

H2. Know your DRIVE TEAM positions. Prior to the start of the MATCH, DRIVE TEAMS must be positioned as follows:

- A. HUMAN PLAYERS, DRIVERS and COACHES must be in their ALLIANCE STATION and between the STARTING LINES
- B. TECHNICIANS must be in their designated area outside the ALLIANCE STATION.

Violation: MATCH will not start until the situation is corrected.

The specific location for the TECHNICIAN to stand during a MATCH may vary by event due to space restrictions around the FIELD. In general, TECHNICIANS are located with their team's ROBOT cart and within close proximity to the FIELD.

H3. Leave the GAME PIECES alone. Prior to the start of the MATCH, DRIVE TEAMS may not rearrange the GAME PIECES within the ALLIANCE STATION, staged in the LOADING STATION, or staged in the DEPOT.



Violation: MATCH will not start until the situation is corrected.

9.2 DURING THE MATCH

- H4. COACHES and other teams: hands off the controls.** A ROBOT shall be operated solely by the DRIVERS and/or HUMAN PLAYERS of that team.

Violation: DISABLED.

Exceptions may be made before a MATCH for major conflicts, e.g. religious holidays, major testing, transportation issues, etc.

- H5. Wireless devices not allowed.** During a MATCH, DRIVE TEAMS may not use electronic devices which have the capability of receiving communications from persons outside of the ARENA (e.g. cell phones or wearable technology).

Violation: YELLOW CARD.

- H6. No wandering.** During the MATCH, DRIVERS, COACHES, and HUMAN PLAYERS may not contact anything outside the ALLIANCE STATION and TECHNICIANS may not contact anything outside their designated area.

Exceptions are granted in cases concerning safety and for actions that are inadvertent, momentary, and inconsequential.

Violation: FOUL.

- H7. GAME PIECES through LOADING STATIONS only.** During the MATCH, team members may only enter GAME PIECES on to the FIELD through their LOADING STATIONS (i.e. fed such that they go in the ALLIANCE STATION side and exit the LOADING STATION HATCH or FIELD side of the chute).

Violation: FOUL per GAME PIECE.

- H8. COACHES, no GAME PIECES.** During a MATCH, COACHES may not touch GAME PIECES unless for safety purposes.

Violation: FOUL per instance.

9.2.1 ONLY DURING THE SANDSTORM PERIOD

- H9. Between the (STARTING) LINES.** During the SANDSTORM PERIOD, COACHES, DRIVERS, HUMAN PLAYERS, and any part of the OPERATOR CONSOLE may not break the vertical planes defined by the STARTING LINES, unless for safety purposes.

Exceptions are granted in cases concerning safety and for actions that are inadvertent, momentary, and inconsequential.

Violation: TECH FOUL.

- H10. No peeking.** During the SANDSTORM PERIOD, COACHES, DRIVERS, and HUMAN PLAYERS may not look over the top of the ALLIANCE WALL down to the FIELD to overcome the effect of the SANDSTORM.

Violation: TECH FOUL



9.3 IN THE ARENA

H11. By invitation only. Only DRIVE TEAMS for the current MATCH are allowed in their respective ALLIANCE STATIONS.

Violation: MATCH will not start until the situation is corrected.

H12. Identify yourself. DRIVE TEAMS must wear proper identification while in the ARENA. Proper identification consists of:

- A.** All DRIVE TEAM members wearing their designated buttons above the waist in a clearly visible location at all times while in the ARENA.
 - i. The COACH wearing the "COACH" labeled DRIVE TEAM button
 - ii. The DRIVERS and HUMAN PLAYERS each wearing a DRIVE TEAM button
 - iii. The TECHNICIAN wearing the "TECHNICIAN" labeled DRIVE TEAM button
- B.** During a Playoff MATCH, the ALLIANCE CAPTAIN clearly displaying the designated ALLIANCE CAPTAIN identifier (e.g. hat or armband).

Violation: MATCH will not start until the situation is corrected. Those not displaying identification must leave the ARENA.

H13. Don't abuse ARENA access. Team members (except DRIVERS, HUMAN PLAYERS, and COACHES) who are granted access to restricted areas in and around the ARENA (e.g. via TECHNICIAN button, event issued Media badges, etc.) may not coach or use signaling devices during the MATCH. Exceptions will be granted for inconsequential infractions and in cases concerning safety.

Violation: YELLOW CARD

The TECHNICIAN'S role is help the team prepare the ROBOT so it can perform at its full potential during a MATCH. The TECHNICIAN is not an additional COACH, DRIVER or HUMAN PLAYER.

H14. Don't mess with GAME PIECES. Teams may not modify GAME PIECES in any way.

Violation: RED CARD.

Adding or removing air to/from CARGO or removing loop tape from a HATCH PANELS, are examples of violations.

H15. No throwing HATCH PANELS. Team members may never throw HATCH PANELS.

Violation: RED CARD.

H16. Don't bang on the glass. Team members may never strike or hit the PLAYER STATION plastic windows.

Violation: Verbal warning. If subsequent violations, YELLOW CARD.



10 ROBOT CONSTRUCTION RULES

This section of the 2019 *FIRST*® Robotics Competition Game Manual presents legislation relevant to the construction of a 2019 *FIRST* Robotics Competition ROBOT. ROBOTS must pass Inspection at each *FIRST* Robotics Competition event to confirm compliance before being allowed to compete, per the [Inspection & Eligibility Rules](#) section.

10.1 OVERVIEW

The rules listed below explicitly address legal parts and materials and how those parts and materials may be used on a 2019 ROBOT. There are many reasons for the structure of the rules, including safety, reliability, parity, creation of a reasonable design challenge, adherence to professional standards, impact on the competition, and compatibility with the Kit of Parts (KOP). The KOP is the collection of items listed on the current season's Kickoff Kit Checklists, distributed to the team via *FIRST* Choice in the current season, or paid for completely (except shipping) with a Product Donation Voucher (PDV) from the current season.

Another intent of these rules is to have all energy sources and active actuation systems on the ROBOT (e.g. batteries, compressors, motors, servos, cylinders, and their controllers) drawn from a well-defined set of options. This is to ensure that all teams have access to the same actuation resources and that the Inspectors are able to accurately and efficiently assess the legality of a given part.

ROBOTS are made up of COMPONENTS and MECHANISMS. A COMPONENT is any part in its most basic configuration, which cannot be disassembled without damaging or destroying the part or altering its fundamental function. A MECHANISM is a COTS or custom assembly of COMPONENTS that provide specific functionality on the ROBOT. A MECHANISM can be disassembled (and then reassembled) into individual COMPONENTS without damage to the parts.

Many rules in this section reference Commercial-Off-The-Shelf (COTS) items. A COTS item must be a standard (i.e. not custom order) part commonly available from a VENDOR for all teams for purchase. To be a COTS item, the COMPONENT or MECHANISM must be in an unaltered, unmodified state (with the exception of installation or modification of any software). Items that are no longer commercially available but are functionally equivalent to the original condition as delivered from the VENDOR are considered COTS and may be used.

Example 1: A team orders two (2) ROBOT grippers from RoboHands Corp. and receives both items. They put one in their storeroom and plan to use it later. Into the other, they drill "lightening holes" to reduce weight. The first gripper is still classified as a COTS item, but the second gripper is now a FABRICATED ITEM, as it has been modified.

Example 2: A team obtains openly available blueprints of a drive module commonly available from Wheels-R-Us Inc. and has local machine shop "We-Make-It, Inc." manufacture a copy of the part for them. The produced part is NOT a COTS item, because it is not commonly carried as part of the standard stock of We-Make-It, Inc.

Example 3: A team obtains openly available design drawings from a professional publication during the pre-season, and uses them to fabricate a gearbox for their ROBOT during the build period following Kickoff. The design drawings are considered a COTS item, and may be used as "raw material" to fabricate the gearbox. The finished gearbox itself would be a FABRICATED ITEM, and not a COTS item.

Example 4: A COTS part that has non-functional label markings added would still be considered a COTS part, but a COTS part that has device-specific mounting holes added is a FABRICATED ITEM.



Example 5: A team has a COTS single-board processor version 1.0, which can no longer be purchased. Only the COTS single-board processor version 2.0 may be purchased. If the COTS single-board processor version 1.0 is functionally equivalent to its original condition, it may be used.

Example 6: A team has a COTS gearbox which has been discontinued. If the COTS gearbox is functionally equivalent to its original condition, it may be used.

A **VENDOR** is a legitimate business source for COTS items that satisfies all the following criteria:

- A.** has a Federal Tax Identification number. In cases where the **VENDOR** is outside of the United States, they must possess an equivalent form of registration or license with the government of their home nation that establishes and validates their status as a legitimate business licensed to operate within that country.
- B.** is not a “wholly owned subsidiary” of a *FIRST* Robotics Competition team or collection of teams. While there may be some individuals affiliated with both a team and the **VENDOR**, the business and activities of the team and **VENDOR** must be completely separable.
- C.** must be able to ship any general (i.e., non-*FIRST* unique) product within five business days of receiving a valid purchase request. It is recognized that certain unusual circumstances (such as 1,000 *FIRST* teams all ordering the same part at once from the same **VENDOR**) may cause atypical delays in shipping due to backorders for even the largest **VENDORS**. Such delays due to higher-than-normal order rates are excused.
- D.** should maintain sufficient stock or production capability to fill teams’ orders within a reasonable period during the season (less than 1 week). (Note that this criterion may not apply to custom-built items from a source that is both a **VENDOR** and a fabricator. For example, a **VENDOR** may sell flexible belting that the team wishes to procure to use as treads on their drive system. The **VENDOR** cuts the belting to a custom length from standard shelf stock that is typically available, welds it into a loop to make a tread, and ships it to a team. The fabrication of the tread takes the **VENDOR** two weeks. This would be considered a **FABRICATED ITEM**, and the two-week ship time is acceptable.) Alternately, the team may decide to fabricate the treads themselves. To satisfy this criterion, the **VENDOR** would just have to ship a length of belting from shelf stock (i.e. a COTS item) to the team within five business days and leave the welding of the cuts to the team.
- E.** makes their products available to all *FIRST* Robotics Competition teams. A **VENDOR** must not limit supply or make a product available to just a limited number of *FIRST* Robotics Competition teams.

The intent of this definition is to be as inclusive as possible to permit access to all legitimate sources, while preventing ad hoc organizations from providing special-purpose products to a limited subset of teams in an attempt to circumvent the cost accounting rules.

FIRST desires to permit teams to have the broadest choice of legitimate sources possible, and to obtain COTS items from the sources that provide them with the best prices and level of service available. Teams also need to protect against long delays in availability of parts that will impact their ability to complete their **ROBOT**. The build season is brief, so the **VENDOR** must be able to get their product, particularly *FIRST* unique items, to a team in a timely manner.

Ideally, chosen **VENDORS** should have national distributors (e.g. Home DEPOT, Lowes, MSC, McMaster-Carr, etc.). Remember, *FIRST* Robotics Competition events are not always near home – when parts fail, local access to replacement materials is often critical.



A FABRICATED ITEM is any COMPONENT or MECHANISM that has been altered, built, cast, constructed, concocted, created, cut, heat treated, machined, manufactured, modified, painted, produced, surface coated, or conjured partially or completely into the final form in which it will be used on the ROBOT.

Note that it is possible for an item (typically raw materials) to be neither COTS nor a FABRICATED ITEM. For example, a 20 ft. (~610 cm) length of aluminum which has been cut into 5 ft. (~152 cm) pieces by the team for storage or transport is neither COTS (it's not in the state received from the VENDOR), nor a FABRICATED ITEM (the cuts were not made to advance the part towards its final form on the ROBOT).

Teams may be asked to provide documentation proving legality of non-2019 KOP items during Inspection where a Rule specifies limits for a legal part (e.g. pneumatic items, current limits, COTS electronics, etc.).

Some of these rules make use of English unit requirements for parts. If your team has a question about a metric-equivalent part's legality, please e-mail your question to frcparts@firstinspires.org for an official ruling. To seek approval for alternate devices for inclusion in future FIRST Robotic Competition seasons, please contact frcparts@firstinspires.org with item specifications.

Teams should acknowledge the support provided by the corporate Sponsors and Mentors with an appropriate display of their school and Sponsors names and/or logos (or the name of the supporting youth organization, if appropriate).

FIRST Robotics Competition can be a full-contact competition and may include rigorous game play. While the rules aim to limit severe damage to ROBOTS, teams should design their ROBOTS to be robust.

10.2 GENERAL ROBOT DESIGN

- R1.** The ROBOT (excluding BUMPERS) must have a FRAME PERIMETER, contained within the BUMPER ZONE and established in the ROBOT'S STARTING CONFIGURATION, that is comprised of fixed, non-articulated structural elements of the ROBOT. Minor protrusions no greater than ¼ in. (~6 mm) such as bolt heads, fastener ends, weld beads, and rivets are not considered part of the FRAME PERIMETER.

To determine the FRAME PERIMETER, wrap a piece of string around the ROBOT (excluding BUMPERS) at the BUMPER ZONE described in R25 and pull it taut. The string outlines the FRAME PERIMETER.

Example: A ROBOT'S chassis is shaped like the letter 'V', with a large gap between chassis elements on the front of the ROBOT. When wrapping a taut string around this chassis, the string extends across the gap and the resulting FRAME PERIMETER is a triangle with three sides.

Note: to permit a simplified definition of the FRAME PERIMETER and encourage a tight, robust connection between the BUMPERS and the FRAME PERIMETER, minor protrusions such as bolt heads, fastener ends, weld beads, rivets, etc. are excluded from the determination of the FRAME PERIMETER.

- R2.** In the STARTING CONFIGURATION (the physical configuration in which a ROBOT starts a MATCH), no part of the ROBOT shall extend outside the vertical projection of the FRAME PERIMETER, with the exception of its BUMPERS and minor protrusions such as bolt heads, fastener ends, rivets, cable ties, etc.



If a ROBOT is designed as intended and each side is pushed up against a vertical wall (in STARTING CONFIGURATION and with BUMPERS removed), only the FRAME PERIMETER (or minor protrusions) will be in contact with the wall.

The allowance for minor protrusions in R2 is intended to allow protrusions that are both minor in extension from the FRAME PERIMETER and cross sectional area.

- R3.** A ROBOT'S STARTING CONFIGURATION may not have a FRAME PERIMETER greater than 120 in. (~304 cm) and may not be more than 4 ft. (~121 cm) tall.

Be sure to consider the size of the ROBOT on its cart to make sure it will fit through doors. Also consider the size of the ROBOT to ensure that it will fit into a shipping crate, bag, vehicle, etc.

Note that the BUMPER Rules contained in the [BUMPER Rules section](#) may impose additional restrictions on ROBOT design

- R4.** ROBOTS may not extend more than 30 in. (~76 cm) beyond their FRAME PERIMETER (see Figure 10-1)

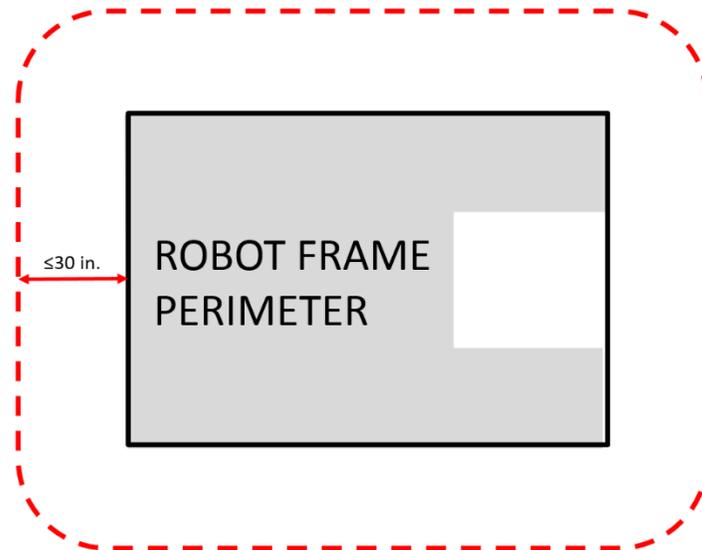


Figure 10-1 FRAME PERIMETER extension

Expect to have to demonstrate a ROBOT'S ability to constrain itself per above during Inspection. Constraints may be implemented with either hardware or software.

See the [Game Rules: ROBOTS](#) section for height and extension restrictions for various areas of the FIELD.

- R5.** The ROBOT weight must not exceed 125 lbs. (~56 kg). When determining weight, the basic ROBOT structure and all elements of all additional MECHANISMS that might be used in different configurations of the ROBOT shall be weighed together (see I3).

For the purposes of determining compliance with the weight limitations, the following items are excluded:

- A.** ROBOT BUMPERS



- B. ROBOT battery and its associated half of the Anderson cable quick connect/disconnect pair (including no more than 12 in. (~30 cm) of cable per leg, the associated cable lugs, connecting bolts, and insulation)

10.3 ROBOT SAFETY & DAMAGE PREVENTION

- R6. A ROBOT may not be designed to shoot a HATCH PANEL such that it travels more than 3 horizontal ft. (~91 cm) beyond its FRAME PERIMETER (reference G6).

The distance is measured with a stationary ROBOT relative to the ground and from the ROBOT'S FRAME PERIMETER to where the HATCH PANEL first contacts the ground. At Inspection, Inspectors will expect teams to demonstrate compliance with R6 using the configuration and operation of the ROBOT that results in the farthest shot of a HATCH PANEL, i.e. the greatest distance of which the ROBOT is capable.

- R7. Traction devices must not have surface features such as metal, sandpaper, hard plastic studs, cleats, hook-loop fasteners or similar attachments that could damage the ARENA. Traction devices include all parts of the ROBOT that are designed to transmit any propulsive and/or braking forces between the ROBOT and FIELD carpet.
- R8. Protrusions from the ROBOT and exposed surfaces on the ROBOT shall not pose hazards to the ARENA elements (including the GAME PIECES) or people.

If the ROBOT includes protrusions that form the "leading edge" of the ROBOT as it drives, and the protrusions have a surface area of less than 1 in.² (~6 cm²), it will invite detailed Inspection. For example, forklifts, lifting arms, or grapplers may be carefully inspected for these hazards.

- R9. ROBOT parts shall not be made from hazardous materials, be unsafe, cause an unsafe condition, or interfere with the operation of other ROBOTS.

Examples of items that will violate R9 include (but are not limited to):

- a. Shields, curtains, or any other devices or materials designed or used to obstruct or limit the vision of any DRIVERS and/or COACHES and/or interfere with their ability to safely control their ROBOT
- b. Speakers, sirens, air horns, or other audio devices that generate sound at a level sufficient to be a distraction
- c. Any devices or decorations specifically intended to jam or interfere with the remote sensing capabilities of another ROBOT, including vision systems, acoustic range finders, sonars, infrared proximity detectors, etc. (e.g. including imagery on your ROBOT that, to a reasonably astute observer, mimics the retro-reflective features of vision targets described in the [Vision Targets](#) section)
- d. Exposed lasers other than Class I.
- e. Flammable gasses
- f. Any device intended to produce flames or pyrotechnics
- g. Hydraulic fluids or hydraulic items
- h. Switches or contacts containing liquid mercury
- i. Circuitry used to create voltages in excess of 24 Volts
- j. Any ballast not secured sufficiently, including loose ballast e.g. sand, ball bearings, etc., such that it may become loose during a MATCH.
- k. Exposed, untreated hazardous materials (e.g. lead weights) used on the ROBOT. These materials may be permitted if painted, encapsulated or otherwise sealed to prevent contact. These materials may not be machined in any way at an event.
- l. Tire sealant



m. High intensity light sources used on the ROBOT (e.g. super bright LED sources marketed as 'military grade' or 'self-defense') may only be illuminated for a brief time while targeting and may need to be shrouded to prevent any exposure to participants. Complaints about the use of such light sources will be followed by re-inspection and possible disablement of the device.

Teams should provide MSD Sheets for any materials they use that might be considered questionable during ROBOT Inspection.

R10. ROBOTS must allow removal of GAME PIECES from the ROBOT and the ROBOT from FIELD elements while DISABLED and powered off.

ROBOTS will not be re-enabled after the MATCH, so teams must be sure that GAME PIECES and ROBOTS can be quickly, simply, and safely removed.

R11. Lubricants may be used only to reduce friction within the ROBOT. Lubricants must not contaminate the FIELD or other ROBOTS.

10.4 BUDGET CONSTRAINTS & FABRICATION SCHEDULE

R12. The total cost of all items on the ROBOT shall not exceed \$5500 USD. All costs are to be determined as explained in the [Budget Constraints & Fabrication Schedule](#) section. Exceptions are as follows:

- A. individual items that are less than \$5 USD each, as purchasable from a VENDOR, and
- B. items from the current year's KOP, up to the KOP quantity (including the rookie KOP items). Identical functional replacements may be used to meet this criterion.

Teams should be prepared to disclose to Inspectors the cost of any non-KOP item and the total cost of the ROBOT. Teams should also be prepared to show that a particular item was received from *FIRST* Choice or a voucher in the current season if necessary.

Per I5, teams must be prepared to display a Bill of Material (BOM) to Inspectors during Inspection. The BOM may be displayed in either printed or electronic form.

Individual COMPONENTS or MECHANISMS, not excluded in R12, that are retrieved from previous ROBOTS and used on 2019 ROBOTS must have their un-depreciated cost included in the 2019 BOM and applied to the overall cost assessment.

Example 1: The Kickoff KOP checklist lists two (2) of motor controller XYZ in the Gray Tote distributed to rookie teams. Any team, including a veteran team that did not receive these items, can account for up to two (2) of them on the KOP checklist at a \$0 cost. Additional quantity of the same item would have to be accounted at the Fair Market Value.

Example 2: A team uses *FIRST* Choice credits, or a voucher, to acquire part ABC. This part, in the quantity obtained by the team via the KOP may be accounted at \$0. Additional quantity of the same item would have to be accounted at the Fair Market Value.

Example 3: Part ABC is available in *FIRST* Choice, but a team decides they have enough already on hand and does not acquire any through *FIRST* Choice. All of these items used on the ROBOT need to be accounted for at Fair Market Value as they did not come from the current year's KOP.

An "identical functional replacement" is an item which, to any reasonably astute observer, has the same form, fit, feature set, and function as the original component.



For example, any CIM motor can replace a CIM motor or a sheet of polycarbonate paid for completely by a voucher can be replaced with a sheet of polycarbonate of the same parameters (thickness, color, size, etc.). As another example, a motor controller that has the same form, fit, and function (i.e. controlling motors) as the original motor controller, but a different feature set (i.e. can communicate over CAN vs. the original controller which was PWM only) is not an identical functional replacement because the controllers' feature sets differ.

- R13.** No individual, non-KOP item shall have a Fair Market Value that exceeds \$500 USD. The total cost of COMPONENTS purchased in bulk may exceed \$500 USD as long as the cost of an individual COMPONENT does not exceed \$500 USD.

If a COTS item is part of a modular system that can be assembled in several possible configurations, then each individual module must fit within the price constraints defined in R13.

If the modules are designed to assemble into a single configuration, and the assembly is functional in only that configuration, then the total cost of the complete assembly including all modules must fit within the price constraints defined in R13.

In summary, if a VENDOR sells a system or a kit, a team must use the entire system/kit Fair Market Value and not the value of its COMPONENT pieces.

Example 1: VENDOR A sells a gearbox that can be used with a number of different gear sets, and can mate with two different motors they sell. A team purchases the gearbox, a gear set, and a motor (which are not offered together as an assembly or kit), then assembles them together. Each part is treated separately for the purpose of BOM costing, since the purchased pieces can each be used in various configurations.

Example 2: VENDOR B sells a robotic arm assembly that the team wants to use. However, it costs \$700 USD, so they cannot use it. The VENDOR sells the "hand", "wrist", and "arm" as separate assemblies, for \$200 USD each. A team wishes to purchase the three items separately, then reassemble them. This would not be legal, as they are really buying and using the entire assembly, which has a Fair Market Value of \$700 USD.

Example 3: VENDOR C sells a set of wheels or wheel modules that are often used in groups of four. The wheels or modules can be used in other quantities or configurations. A team purchases four and uses them in the most common configuration. Each part is treated separately for the purpose of BOM costing, since the purchased pieces can be used in various configurations.

- R14.** The BOM cost of each non-KOP item must be calculated based on the unit Fair Market Value for the material and/or labor, except for labor provided by team members (including sponsor employees who are members of the team), members of other teams, event provided Machine Shops and shipping.

Any Kickoff Kit or *FIRST* Choice item received by a team in or before the 2018 season that has a FMV over \$500 may be accounted at \$500 on the team's BOM.

The Fair Market Value of a COTS part is its price defined by a VENDOR.

Example 1: A team orders a custom bracket made by a company to the team's specification. The company's material cost and normally charged labor rate apply.



Example 2: A team receives a donated sensor. The company would normally sell this item for \$52 USD, which is therefore its Fair Market Value.

Example 3: Special price discounts from National Instruments and other *FIRST* Suppliers are being offered to teams. The discounted purchase price of items from these sources may be used in the additional parts accounting calculations.

Example 4: A team purchases steel bar stock for \$10 USD and has it machined by a local machine shop. The machine shop is not considered a team Sponsor but donates two (2) hours of expended labor anyway. The team must include the estimated normal cost of the labor as if it were paid to the machine shop and add it to the \$10 USD.

Example 5: A team purchases steel bar stock for \$10 USD and has it machined by a local machine shop that is a recognized Sponsor of the team. If the machinists are considered members of the team, their labor costs do not apply. The total applicable cost for the part would be \$10 USD.

It is in the best interests of the teams and *FIRST* to form relationships with as many organizations as possible. Teams are encouraged to be expansive in recruiting and including organizations in their team, as that exposes more people and organizations to *FIRST*. Recognizing supporting companies as Sponsors of, and members in, the team is encouraged, even if the involvement of the Sponsor is solely through the donation of fabrication labor.

Example 6: A team purchases steel bar stock for \$10 USD and has it machined by another team. The total applicable cost for the part would be \$10 USD.

Example 7: A team purchases a 4 ft. by 4 ft. (~122 cm by 122 cm) sheet of aluminum, but only uses a piece 10 in. by 10 in. (~25 cm by 25 cm) on their ROBOT. The team identifies a source that sells aluminum sheet in 1 by 1 ft. (~30 cm by 30 cm) pieces. The team may cost their part based on a 1 by 1 ft. (~30 cm by 30 cm) piece, even though they cut the piece from a larger bulk purchase. They do not have to account for the entire 4 by 4 ft. (~122 cm by 122 cm) bulk purchase item.

Example 8: A team purchases a widget at a garage sale or online auction for \$3, but it's available for sale from a VENDOR for \$13. The Fair Market Value that gets reported on the BOM is \$13.

R15. Physical ROBOT elements created before Kickoff are not permitted. Exceptions are:

- A.** OPERATOR CONSOLE,
- B.** BUMPERS (a protective assembly designed to attach to the exterior of the ROBOT and constructed as specified in the [BUMPER Rules](#) section),
- C.** battery assemblies per R5-B,
- D.** FABRICATED ITEMS consisting of one COTS electrical device (e.g. a motor or motor controller) and attached COMPONENTS associated with any of the following modifications:
 - i. wires modified to facilitate connection to a ROBOT (including removal of existing connectors)
 - ii. connectors and any materials to secure and insulate those connectors added
 - iii. motor shafts modified and/or gears, pulleys, or sprockets added
 - iv. motors modified with a filtering capacitor as described in the Blue Box below R63

Please note that this means that FABRICATED ITEMS from ROBOTS entered in previous *FIRST* competitions may not be used on ROBOTS in the 2019 *FIRST* Robotics Competition (other than those allowed per R15-B through -D). Before the formal start of



the Build Season, teams are encouraged to think as much as they please about their ROBOTS. They may develop prototypes, create proof-of-concept models, and conduct design exercises. Teams may gather all the raw stock materials and COTS COMPONENTS they want.

Example 1: A team designs and builds a two-speed shifting transmission during the fall as a training exercise. After Kickoff, they utilize all the design principles they learned in the fall to design their ROBOT. To optimize the transmission design for their ROBOT, they improve the transmission gear ratios and reduce the size, and build two new transmissions, and place them on the ROBOT. All parts of this process are permitted activities.

Example 2: A team re-uses a 2019-legal motor from a previous ROBOT which has had connectors added to the wires. This is permitted, per exception D, because the motor is a COTS electrical COMPONENT.

- R16.** Software and mechanical/electrical designs created before Kickoff are only permitted if the source files (complete information sufficient to produce the design) are available publicly prior to Kickoff.

Example 1: A team realizes that the transmission designed and built in the fall perfectly fits their need for a transmission to drive the ROBOT arm. They build an exact copy of the transmission from the original design plans, and bolt it to the ROBOT. This would be prohibited, as the transmission – although made during the competition season – was built from detailed designs developed prior to Kickoff.

Example 2: A team developed an omni-directional drive system for the 2018 competition. Over the summer of 2018 they refined and improved the control software (written in C++) to add more precision and capabilities. They decided to use a similar system for the 2019 competition. They copied large sections of unmodified code over into the control software of the new ROBOT (also written in C++). This would be a violation of the schedule constraint and is not allowed.

Example 3: The same team decides to use LabVIEW as their software environment for 2019. Following Kickoff, they use the previously-developed C++ code as a reference for the algorithms and calculations required to implement their omni-directional control solution. Because they developed new LabVIEW code as they ported over their algorithms, this is permitted.

Example 4: A different team develops a similar solution during the fall and plans to use the developed software on their competition ROBOT. After completing the software, they post it in a generally accessible public forum and make the code available to all teams. Because they have made their software publicly available before Kickoff, they can use it on their ROBOT.

Example 5: A team develops a transmission during the fall. After completing the project, they publish the CAD files on a generally accessible public forum and make them available to all teams. Because they have made the design publicly available before Kickoff, they can use the design to create an identical transmission, fabricated after Kickoff, for use on their 2019 ROBOT.

- R17.** All ROBOT elements (including items intended for use during the competition in alternative configurations of the ROBOT), with the exception of the WITHHOLDING ALLOWANCE per R23, exceptions listed in R15, and COTS items, must be bagged and sealed, by 04:59 UTC on Stop Build Day, Wednesday, February 20, 2019.



Please note: this time is dictated in UTC (Universal Coordinated Time). You will need to convert to your local time zone. This will result in a time on the previous day (Tuesday, February 19, 2019) for many time zones.

To bag your ROBOT:

- Locate the “Bag and Tag” kit from your Kickoff Kit which contains two plastic bags large enough to contain your ROBOT and at least ten tags with individual serial numbers.
- Set the bag on the floor, leaving room for the ROBOT in the center.
- Place the ROBOT in the center of the bag and pull the bag up around the ROBOT. Be careful not to catch the bag on the corners or sharp edges.
- Tightly seal the bag with your next numbered tag.
- Complete the ROBOT Lock-up Form to verify the date and time that the bag was sealed. The ROBOT Lock-up Form must be signed by an adult, 18 years old or older, who is not a student on the team. This form must be brought with you to all events.

- R18.** For convenience, teams may disassemble their ROBOT and use up to three (3) bags to “Bag and Tag” the pieces. Each bag must have its own numbered tag and entry on the ROBOT Lock-up Form.

Note: The KOP only contains two (2) bags. Teams wishing to use three (3) bags must acquire the third bag themselves.

When transporting their ROBOT, teams may use any transportation method they wish (at their own risk and expense), as long as the ROBOT remains sealed in the bag.

- R19.** If you are attending another event, such as a *FIRST* Championship or another Regional or District event, you must re-seal your ROBOT in the bag with a new tag and enter the new tag number on the ROBOT Lock-up Form prior to leaving the event.

- R20.** Teams must stay “hands-off” their bagged ROBOT elements during the following time periods:
- A.** between Stop Build Day and their first event,
 - B.** during the period(s) between their events, and
 - C.** outside of Pit hours while attending events.

Modifying parts at night offsite (e.g. pits have closed and you bring a MECHANISM back to the hotel to fix it) is a violation of R20-C.

Additional time is allowed as follows:

- D.** After Kickoff, there are no restrictions on when software may be developed.
- E.** On days a team is not attending an event, they may continue development of any items permitted per R23, including items listed as exempt from R23, but must do so without interfacing with the ROBOT.
- F.** ROBOTS may be un-bagged and operated briefly after “Stop Build Day” for brief display purposes only, or for any other purpose that could be reasonably considered ‘display only’ provided the following requirements are met:
 - i. The ROBOT Lock-up Form must be used to track the un-bagging and re-bagging of the ROBOT during this period. In the “Explanation” column of the form, enter “ROBOT Display”.
 - ii. No activity that could be considered “work on” or “practice with” the ROBOT is allowed.



- iii. Brief displays of ROBOT functions, driving for example, are allowed, but not to the extent that they could be considered practice

The intent of this option is to allow teams to briefly show off their ROBOT (e.g. to their community, sponsors, judges, or potential sponsors) after “Stop Build Day”. The intent is not to allow ‘exhibition MATCHES’, or other similar activities, as this would be considered practice.

Un-bagging a ROBOT and putting it on display for many hours (i.e., more than four (4)) at a time is not considered a “brief” display.

A good way to avoid turning a ROBOT display period in to a practice session is to have non-DRIVE TEAM members operate the ROBOT, and only for as short a time as necessary to show the ROBOT’S capabilities.

If you have any questions about the ROBOT Display option, please email frcparts@firstinspires.org.

- G.** Teams attending 2-day events may access their ROBOTS using the ROBOT Access Period.

Teams attending 2-day events will not have as much time to work on their ROBOTS at events as teams attending traditional 3-day Regional events. Due to this, teams are granted an additional “ROBOT Access Period” to un-bag their ROBOT between the “Stop Build Day” and their 2-day district events. 2-day events for the 2019 season include District Qualifier events for the following areas/events:

- *FIRST* Chesapeake District (DC, MD, VA)
- *FIRST* Israel District (IS)
- *FIRST* in Michigan District (MI)
- *FIRST* Mid-Atlantic District (DE, NJ, Eastern PA)
- *FIRST* North Carolina District (NC)
- *FIRST* in Texas (TX, NM)
- Indiana *FIRST* District (IN)
- NE *FIRST* District (CT, MA, ME, NH, RI, VT)
- Ontario District (ON)
- Pacific Northwest (AK, OR, WA)
- Peachtree District (GA)
- *FIRST* North Carolina State Championship
- Indiana State Championship

- R21.** Teams permitted to use the ROBOT Access Period per R20-G may only un-bag their ROBOT for a total of six (6) hours during the 7-day period preceding any 2-day event in which their team will be competing with their ROBOT.

The six hours may be broken up in any way the team wishes, with the exception that no single access period may be shorter than two (2) hours.

The ROBOT must be re-bagged between sessions which must be documented on the ROBOT Lock-up Form.

- R22.** If the ROBOT is accessed before the event, the un-bagging must be noted on the ROBOT Lock-up form and the ROBOT must be re-bagged. The ROBOT must remain sealed in the bag until:

- A.** Your ROBOT Lock-up Form has been checked and approved by an Inspector and
- B.** The pits have officially been opened for ROBOT work.



R23. At each Event, teams may have access to a WITHHOLDING ALLOWANCE. The WITHHOLDING ALLOWANCE is a static set of FABRICATED ITEMS that shall not exceed 30 lbs. (~13 kg.), brought to an event (or ROBOT Access Period) in addition to the bagged items, to be used to repair and/or upgrade a ROBOT. With permission from another team, teams may also have access to FABRICATED ITEMS that are part of that other team's WITHHOLDING ALLOWANCE to repair and/or upgrade their ROBOT. The WITHHOLDING ALLOWANCE may only be brought into the Venue when the team initially loads in at the Event. Items made at an Event do not count towards this weight limit.

Teams should be prepared to show their WITHHOLDING ALLOWANCE items, and potentially have them weighed, during load-in.

This means teams may not store FABRICATED ITEMS outside the pits to be brought to the event at a later time. This set may be changed between events (i.e. a team may leave a different set of items out of the bag and/or fabricate new items to bring to their next event) provided the total weight of FABRICATED ITEMS brought to the next event does not exceed thirty (30) lbs. (~13 kg.).

There is no restriction on the quantity of COTS items or items which do not meet the definitions of COTS or FABRICATED ITEMS (e.g. raw materials) that may be accessed by a team at an Event.

For teams attending 2-Day Events, these FABRICATED ITEMS may be used during the ROBOT Access Period and/or brought to the Event, but the total weight may not exceed 30 lbs. (~13 kg.) FABRICATED ITEMS constructed during the ROBOT Access Period and bagged with the ROBOT are exempt from this limit.

Items specified as exempt from R15 are also exempt from the WITHHOLDING ALLOWANCE limit.

Example 1: A team creates 10 lbs (~4 kg.) of FABRICATED ITEMS after Stop Build Day. During their first ROBOT Access Period before their first event, they install these items on the ROBOT and bag them with the ROBOT. The team may bring up to 20 lbs. (~9 kg.) of FABRICATED ITEMS (which may be items removed from the ROBOT before bagging at the end of the ROBOT Access Period) with them to the event.

Example 2: A team creates 30 lbs (~13 kg.) of FABRICATED ITEMS after Stop Build Day. During their first ROBOT Access Period before their first event, they install these items on the ROBOT and bag them with the ROBOT. The team may not bring any FABRICATED ITEMS (including any initially bagged on Stop Build Day and removed during the ROBOT Access Period) with them to the event.

10.5 BUMPER RULES

A BUMPER is a required assembly which attaches to the ROBOT frame. BUMPERS are important because they protect ROBOTS from damaging/being damaged by other ROBOTS and FIELD elements. Criteria used in writing these rules included the following:

- Minimize variety of BUMPERS so teams can expect consistency
- Minimize the amount of design challenge in creating BUMPERS
- Minimize cost of BUMPER materials
- Maximize use of relatively ubiquitous materials

R24. ROBOTS are required to use BUMPERS to protect all outside corners of the FRAME PERIMETER. For adequate protection, at least 6 in. (~16 cm) of BUMPER must be placed on each side of each outside corner (see Figure 10-2 BUMPER corner examples) and must extend to within ¼ in. (~6



mm) of the FRAME PERIMETER corner. If a FRAME PERIMETER side is shorter than 12 in. (~31 cm), that entire side must be protected by BUMPER (see Figure 10-3). A round or circular FRAME PERIMETER, or segment of the FRAME PERIMETER, is considered to have an infinite number of corners, therefore the entire frame or frame segment must be completely protected by BUMPER(S).

The dimension defined in R24 is measured along the FRAME PERIMETER. The portion of the BUMPER that extends beyond the corner of the FRAME PERIMETER is not included in the 6 in. (~16 cm) requirement. See Figure 10-2.

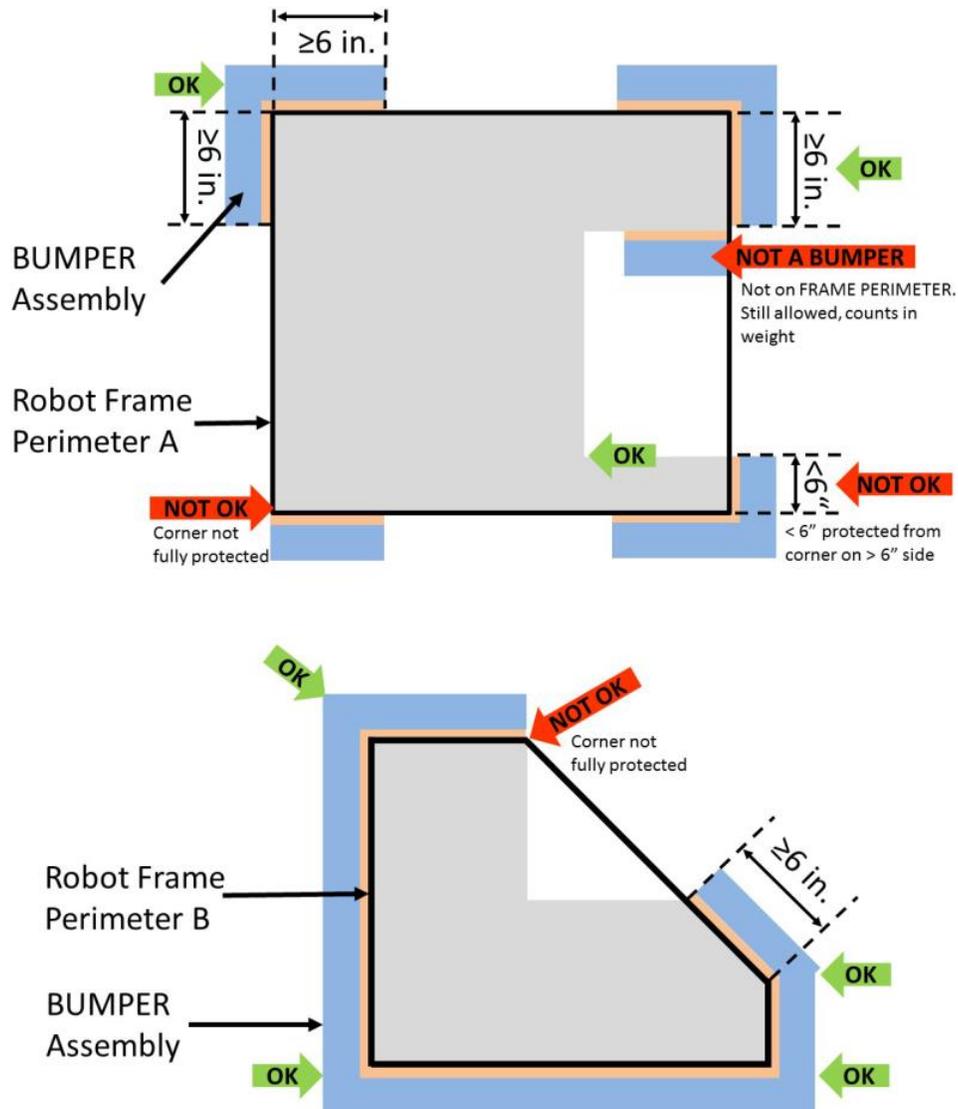


Figure 10-2 BUMPER corner examples



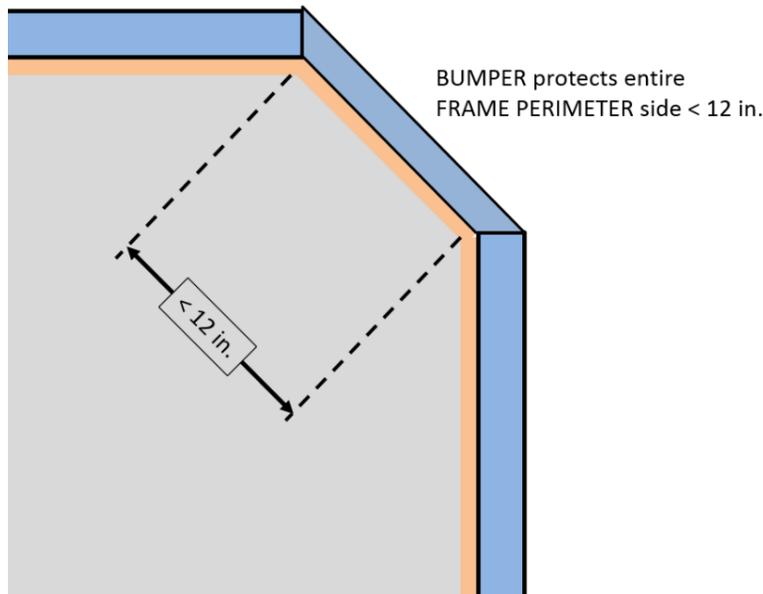


Figure 10-3 BUMPER around full side/corner.

- R25.** Except as allowed per G23, BUMPERS must be located entirely within the BUMPER ZONE, which is the volume contained between the floor and a virtual horizontal plane $7\frac{1}{2}$ in. (~19 cm) above the floor in reference to the ROBOT standing normally on a flat floor. BUMPERS do not have to be parallel to the floor.

This measurement is intended to be made as if the ROBOT is resting on a flat floor (without changing the ROBOT configuration), not relative to the height of the ROBOT from the FIELD carpet. Examples include:

Example 1: A ROBOT that is at an angle while navigating the FIELD has its BUMPERS outside the BUMPER ZONE. If this ROBOT were virtually transposed onto a flat floor, and its BUMPERS are in the BUMPER ZONE, it meets the requirements of R25.

Example 2: A ROBOT outside its HAB ZONE deploys a MECHANISM which lifts the BUMPERS outside the BUMPER ZONE (when virtually transposed onto a flat floor). This violates R25.

- R26.** BUMPERS must not be articulated (relative to the FRAME PERIMETER).
- R27.** BUMPERS (the entire BUMPER, not just the cover) must be designed for quick and easy installation and removal to facilitate inspection and weighing.

As a guideline, BUMPERS should be able to be installed or removed by two (2) people in fewer than five (5) minutes.

- R28.** Each ROBOT must be able to display Red or Blue BUMPERS to MATCH their ALLIANCE color, as assigned in the MATCH schedule distributed at the event (as described in the [MATCH Schedules](#) section). BUMPER Markings visible when installed on the ROBOT, other than the following, are prohibited:

- A. those required per R29,
- B. hook-and-loop fastener or snap fasteners backed by the hard parts of the BUMPER, and



- C. solid white *FIRST* logos between 4¾ in. (~12 cm) and 5¼ in. wide (~13 cm) (i.e. comparable to those available in the [2019 Virtual Kit](#)).

The FRAME PERIMETER facing surfaces of BUMPERS are not “displayed” and thus R28 does not apply.

- R29.** Team numbers must be displayed and positioned on the BUMPERS such that an observer walking around the perimeter of the ROBOT can unambiguously tell the team’s number from any point of view and meet the following additional criteria:

- A. consist of Arabic numerals at least 4 in. (~11 cm) high, at least ½ in. (~13 mm) in stroke width, and be either white in color or outlined in white with a minimum 1/16 in. (~2 mm) outline

The ½ in. (~13 mm) stroke width requirement applies to the majority of the stroke. Font elements less than ½ in. (~13 mm) such as serifs, rounded edges, small hairlines or gaps, etc. are permitted as long as the majority of the stroke meets the sizing requirement and the numbers are unambiguous.

- B. must not wrap around sharp corners (less than 160 degrees) of the FRAME PERIMETER
- C. may not substitute logos or icons for numerals

There is no prohibition against splitting team numbers onto different sections of BUMPER. The intent is that the team’s number is clearly visible and unambiguous so that Judges, REFEREES, Announcers, and other teams can easily identify competing ROBOTS.

This marking is intended to display the team number only, not to intentionally change the surface characteristics of the BUMPER. Excessive material usage as part of any team number marking will invite close scrutiny.

- R30.** Each set of BUMPERS (including any fasteners and/or structures that attach them to the ROBOT) must weigh no more than 15 lbs (~6 kg).

If a multi-part attachment system is utilized (e.g. interlocking brackets on the ROBOT and the BUMPER), then the elements permanently attached to the ROBOT will be considered part of the ROBOT, and the elements attached to the BUMPERS will be considered part of the BUMPER. Each element must satisfy all applicable rules for the relevant system.

- R31.** BUMPERS must be constructed as follows (see Figure 10-6):

- A. be backed by ¾ in. (nominal) thick (~19mm) by 5 in. ± ½ in. (~127 mm ± 12.7 mm) tall plywood or solid, robust wood. Small clearance pockets and/or access holes in the plywood backing are permitted, as long as they do not significantly affect the structural integrity of the BUMPER.

Particle board or chipboard is not likely to survive the rigors of *FIRST* Robotics Competition gameplay and thus not compliant with R31-A.

Note: ¾” plywood is now often marked according to the actual dimension (23/32”) not the nominal size. Plywood sold as 23/32” meets the requirements of R31-A.

- B. hard BUMPER parts allowed per R31-A, -E, -F, and -G must not extend more than 1 in. (~25 mm) beyond the FRAME PERIMETER (measured as shown in Figure 10-4).



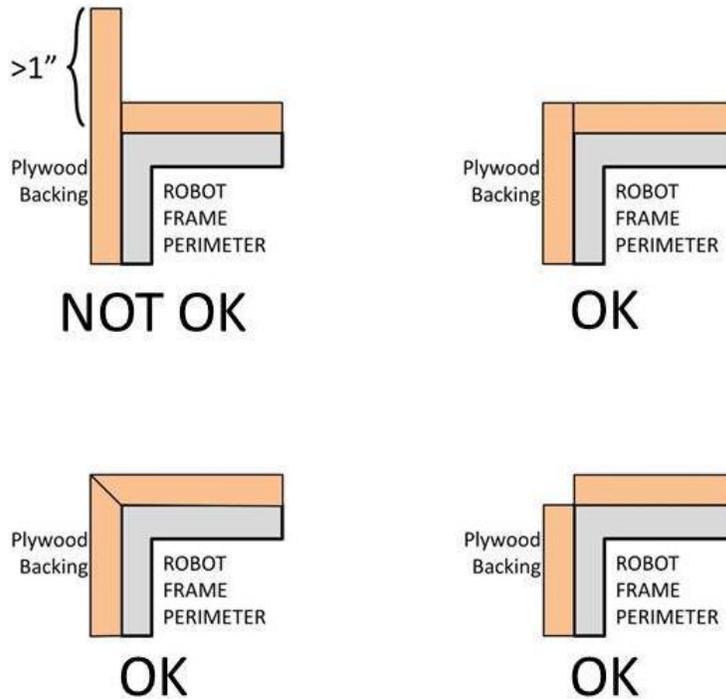


Figure 10-4 Hard Parts of BUMPER Corners

- C. use a stacked pair of approximately 2½ in. (nominal) round, petal, or hex “pool noodles” (solid or hollow) as the BUMPER cushion material (see Figure 10-6). All pool noodles used in a BUMPER set (e.g. Red set of BUMPERS) may not be modified (with the exception of cutting to length or beveling ends) or deformed and must be the same diameter, cross-section, and density (e.g. all round hollow or all hex solid). Cushion material may extend up to 2½ in. (~63 mm) beyond the end of the plywood (see Figure 10-7). To assist in applying the fabric covering, soft fasteners may be used to attach the pool noodles to the wood backing, so long as the cross section in Figure 10-6 is not significantly altered (e.g. tape compressing the pool noodles).

All pool noodles used on a ROBOT must be the same in order to maintain the desired interaction between ROBOTS in the cases of BUMPER-to-BUMPER contact. BUMPERS containing pool noodles of vastly different construction may cause a “ramp” effect when interacting with other BUMPERS.

Noodle compression as a result of smoothing BUMPER fabric or rounding a FRAME PERIMETER corner is not considered deformed. Any compression beyond that, e.g. for the purposes of flattening the noodle, is deformation and a violation of R31-C.

- D. be covered with a rugged, smooth cloth. (multiple layers of cloth and seams are permitted if needed to accommodate R28, provided the cross section in Figure 10-6 is not significantly altered).

Silk and bedding are not considered rugged cloths, however 1000D Cordura is. Tape (e.g. gaffer’s tape) matching the BUMPER color is allowed to patch small holes on a temporary basis.



The cloth must completely enclose all exterior surfaces of the wood and pool noodle material when the BUMPER is installed on the ROBOT. The fabric covering the BUMPERs must be solid in color.

- E. optionally use metal angle, as shown in Figure 10-6 or other fasteners (e.g. staples, screws, etc.) to clamp cloth.
- F. optionally use metal brackets (i.e. angle or sheet metal) to attach BUMPER segments to each other (see Figure 10-5).

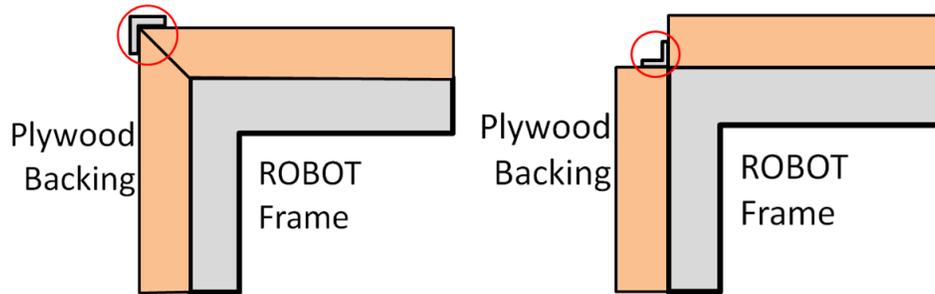


Figure 10-5 Hard Parts of BUMPER Corners

- G. must attach to the FRAME PERIMETER of the ROBOT with a rigid fastening system to form a tight, robust connection to the main structure/frame (e.g. not attached with hook-and-loop, tape, or tie-wraps). The attachment system must be designed to withstand vigorous game play. All removable fasteners (e.g. bolts, locking pins, pip-pins, etc.) will be considered part of the BUMPERs.

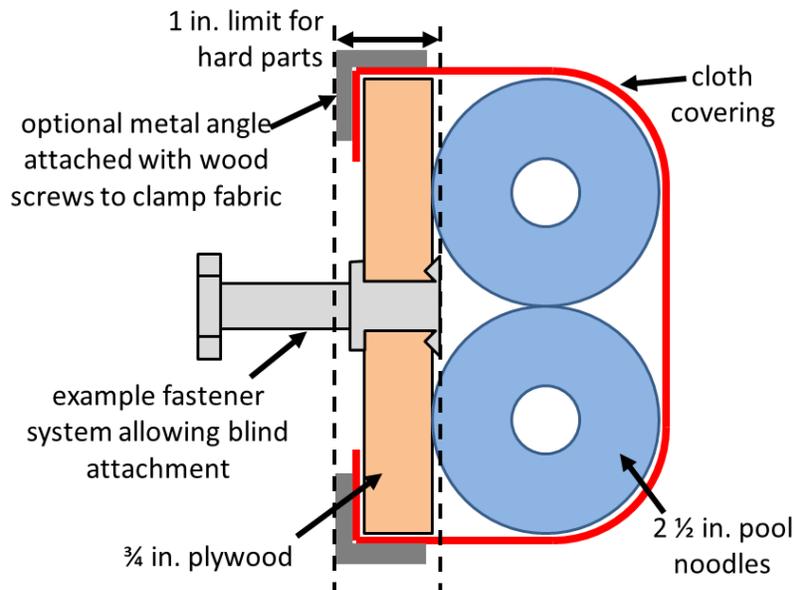


Figure 10-6 BUMPER Vertical Cross Section



R32. Corner joints between BUMPERS must be filled with pool noodle material. Examples of implementation are shown in Figure 10-7.

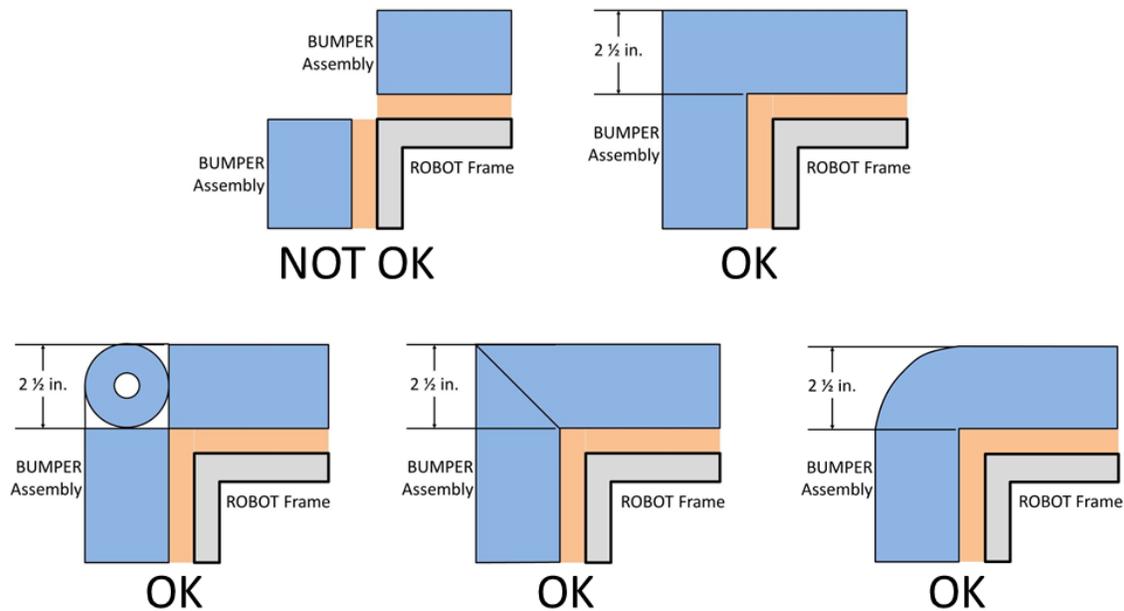


Figure 10-7 Soft Parts of BUMPER Corners

R33. BUMPERS must be supported by the structure/frame of the ROBOT (see Figure 10-8). To be considered supported, a minimum of 1/2 in. (~13 mm) at each end of each BUMPER wood segment must be backed by the FRAME PERIMETER ($\leq 1/4$ in. gap). “Ends” exclude hard BUMPER parts which extend past the FRAME PERIMETER permitted by R31-B. Additionally, any gap between the backing material and the frame:

- A. must not be greater than 1/4 in. (~6 mm) deep, or
- B. not more than 8 in. (~20 cm) wide

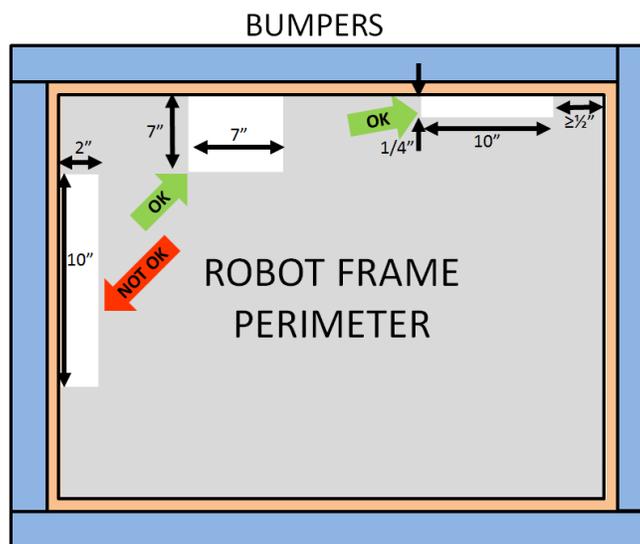


Figure 10-8 BUMPER support examples



10.6 MOTORS & ACTUATORS

R34. The only motors and actuators permitted on 2019 ROBOTS include the following (in any quantity):

Table 10-1 Motor allowances

Motor Name	Part Numbers Available	
CIM	FR801-001 M4-R0062-12 AM802-001A 217-2000 PM25R-44F-1005	PM25R-45F-1004 PM25R-45F-1003 PMR25R-45F-1003 PMR25R-44F-1005 am-0255
West Coast Products RS775 Pro	217-4347	
Banebots	am-3830 M7-RS775-18 RS775WC-8514	M5 – RS550-12 RS550VC-7527 RS550
AndyMark 9015	am-0912	
VEX BAG	217-3351	
VEX mini-CIM	217-3371	
AndyMark PG	am-2161 (alt. PN am-2765)	am-2194 (alt. PN am-2766)
KOP Automotive motors	Denso AE235100-0160 Denso 5-163800-RC1 Denso 262100-3030	Denso 262100-3040 Bosch 6 004 RA3 194-06
Snow Blower Motor	am-2235	
AndyMark NeveRest	am-3104	
AndyMark RedLine Motor	am-3775	am-3775a
Nidec Dynamo BLDC Motor	am-3740	DM3012-1063
REV Robotics NEO Brushless	REV-21-1650	
Electrical solenoid actuators, no greater than 1 in. (nominal) stroke and rated electrical input power no greater than 10 watts (W) continuous duty at 12 volts (VDC)		
Hard drive motors or fans that are: included in any Kickoff Kit, distributed via <i>FIRST</i> Choice, part of a legal motor controller (including manufacturer provided accessories), or part of a legal COTS computing device		
Factory installed vibration and autofocus motors resident in COTS computing devices (e.g. rumble motor in a smartphone).		
PWM COTS servos with a retail cost < \$75.		
Motors integral to a COTS sensor (e.g. LIDAR, scanning sonar, etc.), provided the device is not modified except to facilitate mounting		
One (1) compressor compliant with R86 and used to compress air for the ROBOT'S pneumatic system		

For servos, note that the roboRIO is limited to a max current output of 2.2A on the 6V rail (12.4W of electrical input power). Teams should make sure that their total servo power usage remains below this limit at all times.

Given the extensive amount of motors allowed on the ROBOT, teams are encouraged to consider the total power available from the ROBOT battery during the design and build of the ROBOT. Drawing large amounts of current from many motors at the same time could lead to drops in ROBOT battery voltage that may result in tripping the main breaker or trigger the brownout protection of the roboRIO. For more information about the roboRIO brownout protection and measuring current draw using the PDP, see [roboRIO Brownout and Understanding Current Draw](#).

R35. The integral mechanical and electrical system of any motor must not be modified. Motors, servos, and electric solenoids used on the ROBOT shall not be modified in any way, except as follows:



- A. The mounting brackets and/or output shaft/interface may be modified to facilitate the physical connection of the motor to the ROBOT and actuated part.
- B. The electrical input leads may be trimmed to length as necessary and connectors or splices to additional wiring may be added.
- C. The locking pins on the window motors (P/N: 262100-3030 and 262100-3040) may be removed.
- D. The connector housings on KOP Automotive motors listed in Table 10-1 may be modified to facilitate lead connections.
- E. Servos may be modified as specified by the manufacturer (e.g. re-programming or modification for continuous rotation).
- F. The wiring harness of the Nidec Dynamo BLDC Motor may be modified as documented by *FIRST* in the "[Nidec Dynamo BLDC Motor with Controller](#)" [Screensteps article](#).
- G. Minimal labeling applied to indicate device purpose, connectivity, functional performance, etc.

The intent of this rule is to allow teams to modify mounting tabs and the like, not to gain a weight reduction by potentially compromising the structural integrity of any motor. The integral mechanical and electrical system of the motor is not to be modified.

Note that for the previous KOP Window motors and the Bosch motor, the gearbox is considered integral to the motor, thus the motor may not be used without the gearbox.

R36. With the exception of servos, fans, or motors integral to sensors of COTS computing devices permitted in R34, each actuator must be controlled by a power regulating device. The only power regulating devices for actuators permitted on the ROBOT include:

A. Motor Controllers

- i. DMC 60/DMC 60c Motor Controller (P/N: 410-334-1, 410-334-2)
- ii. Jaguar Motor Controller (P/N: MDL-BDC, MDL-BDC24, and 217-3367) connected to PWM only
- iii. Nidec Dynamo BLDC Motor with Controller to control integral actuator only (P/N 840205-000, am-3740)
- iv. SD540 Motor Controller (P/N: SD540x1, SD540x2, SD540x4, SD540Bx1, SD540Bx2, SD540Bx4, SD540C)
- v. Spark Motor Controller (P/N: REV-11-1200)
- vi. Spark MAX Motor Controller (P/N: REV-11-2158)
- vii. Talon Motor Controller (P/N: CTRE_Talon, CTRE_Talon_SR, and am-2195)
- viii. Talon SRX Motor Controller (P/N: 217-8080, am-2854, 14-838288)
- ix. Victor 884 Motor Controller (P/N: VICTOR-884-12/12)
- x. Victor 888 Motor Controller (P/N: 217-2769)
- xi. Victor SP Motor Controller (P/N: 217-9090, am-2855, 14-868380)
- xii. Victor SPX Motor Controller (P/N: 217-9191, 17-868388, am-3748)

B. Relay Modules

- i. Spike H-Bridge Relay (P/N: 217-0220 and SPIKE-RELAY-H)
- ii. Automation Direct Relay (P/N: AD-SSR6M12-DC-200D, AD-SSRM6M25-DC-200D, AD-SSR6M45-DC-200D)

C. Pneumatics controllers

- i. Pneumatics Control Module (P/N: am-2858, 217-4243)



Note: The Automation Direct Relays are single directional. Per R37 they may not be wired together in an attempt to provide bi-directional control.

- R37.** Each power regulating device may control electrical loads per Table 10-2. Unless otherwise noted, each power regulating device shall control one and only one electrical load.

Table 10-2 Power regulating device allotments

Electrical Load	Motor Controller	Relay Module	Pneumatics Controller
CIM AndyMark 9015 WCP RS775 Pro VEXpro BAG/mini-CIM Banebots AndyMark RedLine Motor REV Robotics NEO Brushless	Yes	No	No
KOP Automotive Motors AndyMark PG Snow Blower Motor NeverRest	Yes (up to 2 per controller)	Yes	No
Nidec Dynamo BLDC Motor w/ Controller	Yes (integrated controller only)	No	No
Compressor	No	Yes	Yes
Pneumatic Solenoid Valves	No	Yes ¹	Yes (1 per channel)
Electric Solenoids	Yes ¹	Yes ¹	Yes (1 per channel)
CUSTOM CIRCUITS²	Yes ¹	Yes ¹	Yes (1 per channel)

¹ Multiple low-load, pneumatic solenoid valves (relay only), electric solenoids or CUSTOM CIRCUITS may be connected to a single relay module or motor controller. This would allow one (1) relay module or motor controller to drive multiple pneumatic actions or multiple CUSTOM CIRCUITS. No other electrical load can be connected to a relay module used in this manner.

² A CUSTOM CIRCUIT is any electrical COMPONENT of the ROBOT other than motors, pneumatic solenoids, roboRIO, PDP, PCM, VRM, RSL, 120A breaker, motor controllers, relay modules (per R36-B), wireless bridge, electrical solenoid actuators, or batteries.

- R38.** Servos must be connected to, and only to, one of the following:

- A. PWM PORTS on the roboRIO
- B. PWM PORTS on a WCP Spartan Sensor Board (P/N: WCP-0045)
- C. REV Robotics Servo Power Module (P/N: REV-11-1144)

10.7 POWER DISTRIBUTION

In order to maintain safety, the rules in this section apply at all times while at the event, not just while the ROBOT is on the FIELD for MATCHES.

- R39.** The only legal source of electrical energy for the ROBOT during the competition, the ROBOT battery, must be a non-spillable sealed lead acid (SLA) battery with the following specifications:



- A. Nominal voltage: 12V
- B. Nominal capacity at 20-hour discharge rate: minimum 17Ah, maximum 18.2Ah
- C. Shape: Rectangular
- D. Nominal Dimensions: 7.1 in. x 3 in. x 6.6 in., +/- .1 in. for each dimension (~ 180 mm x 76mm x 168 mm, +/- 2.5 mm for each dimension)
- E. Nominal weight: 11lbs. to 14.5 lbs. (~5 kg. to 6.5 kg.)
- F. Terminals: Nut and bolt style

Examples of batteries which meet these criteria include:

- a. Energys (P/N: NP18-12, NP18-12B, NP18-12BFR)
- b. MK Battery (P/N: ES17-12)
- c. Battery Mart (P/N: SLA-12V18)
- d. Sigma (P/N: SP12-18)
- e. Universal Battery (P/N: UB12180)
- f. Power Patrol (P/N: SLA1116)
- g. Werker Battery (P/N: WKA12-18NB)
- h. Power Sonic (P/N: PS-12180NB)
- i. Yuasa (P/N: NP18-12B)
- j. Panasonic (P/N: LC-RD-1217)
- k. Interstate Batteries (P/N: BSL1116)
- l. Duracell Ultra Battery (P/N: DURA12-18NB)

Teams should be aware that they may be asked to provide documentation of the specifications of any battery not listed above.

Batteries should be charged in accordance with manufacturer's specification. (Please see the [FIRST Safety Manual](#) for additional information.)

- R40.** COTS USB battery packs with a capacity of 100Wh or less (20000mAh at 5V) and 2.5 Amp max output per port, or batteries integral to and part of a COTS computing device or self-contained camera (e.g. laptop batteries, GoPro style camera, etc.) may be used to power COTS computing devices and any peripheral COTS input or output devices connected to the COTS computing device provided they are:
- A. securely fastened to the ROBOT.
 - B. connected only using unmodified COTS cables
 - C. charged according to manufacturer recommendations
- R41.** Any battery charger used to charge a ROBOT battery must have the corresponding Anderson SB connector installed.
- R42.** Any battery charger used to charge a ROBOT battery may not be used such that it exceeds 6-Amp peak charge current.
- R43.** No batteries other than those allowed per R39 and R40 are allowed on the ROBOT, whether or not they are being used to supply power.

This means teams may not use additional batteries as extra weight on their ROBOTS, for example.

- R44.** The ROBOT battery must be secured such that it will not dislodge during vigorous ROBOT interaction including if the ROBOT is turned over or placed in any arbitrary orientation.
- R45.** Each electrical terminal on the ROBOT battery, main breaker, and their connections (lugs, stripped wire ends, etc.) to the wire must be fully insulated at all times.



- R46.** Non-electrical sources of energy used by the ROBOT, (i.e., stored at the start of a MATCH), shall come only from the following sources:
- A.** compressed air stored in the pneumatic system that has been charged in compliance with R86 and R87,
 - B.** a change in the altitude of the ROBOT center of gravity,
 - C.** storage achieved by deformation of ROBOT parts,
 - D.** closed-loop COTS pneumatic (gas) shocks, and
 - E.** air-filled (pneumatic) wheels.
- R47.** The one (1) ROBOT battery, a single pair of Anderson Power Products (or APP) 2-pole SB type connectors, the one (1) main 120-amp (120A) surface mount circuit breaker (Cooper Bussman P/N: CB185-120, CB185F-120, CB285-120), and the one (1) CTR Electronics Power Distribution Panel (PDP, P/N: am-2856, 217-4244, 14-806880) shall be connected with 6 AWG (7 SWG or 16 mm²) copper wire or larger, with no additional devices or modifications, as shown in Figure 10-9.

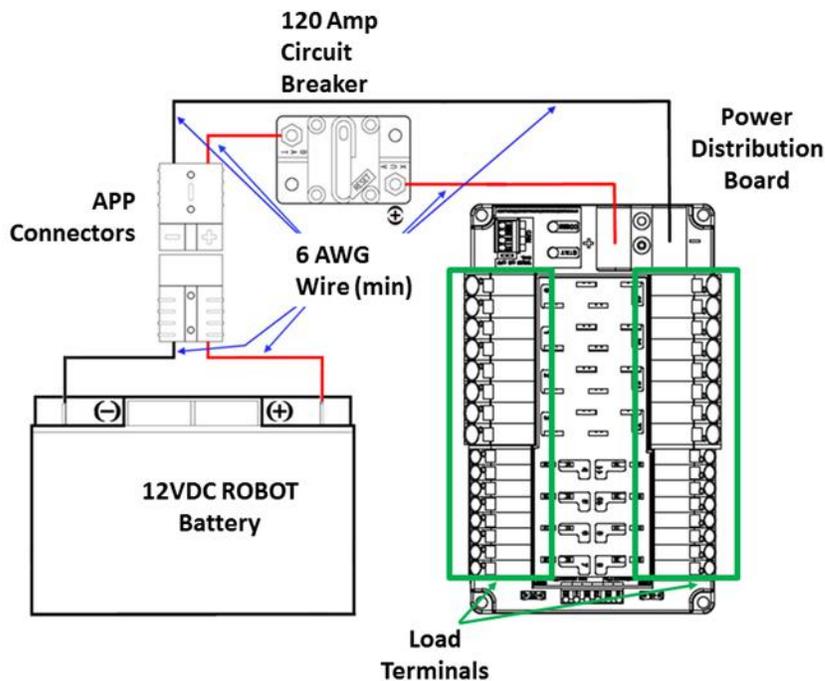


Figure 10-9 Electrical connection diagram

“SB type” refers to SB type only (e.g. SB-50, SB-120, etc.), not SBS or any other part type beginning with SB. All batteries supplied by *FIRST* (such as Spare Parts and international batteries) will have a Red or Pink SB50 connector installed which may not be removed.

The pink connectors included in the 2019 KOP mate with the Red SB50 connector.

- R48.** All circuits, with the exceptions of those listed in R53 and R55, must connect to, and have power sourced solely by, a single protected 12VDC WAGO connector pair (i.e. the Load Terminals, as shown in Figure 10-9) of the one (1) CTR Electronics Power Distribution Panel, not the M6 cap screws.



- R49.** All wiring and electrical devices, including all Control System COMPONENTS, shall be electrically isolated from the ROBOT frame. The ROBOT frame must not be used to carry electrical current.

R49 is checked by observing a $>3k\Omega$ resistance between either the (+) or (-) post within the APP connector that is attached to the PDP and any point on the ROBOT.

All legal motor controllers with metal cases are electrically isolated. They may be mounted directly to ROBOT frame COMPONENTS.

Note that some cameras, decorative lights and sensors (e.g. the Axis 206 camera, some encoders, some IR sensors, etc.) have grounded enclosures. These devices must be electrically isolated from the ROBOT frame to ensure compliance with R49.

- R50.** The 120A circuit breaker must be quickly and safely accessible from the exterior of the ROBOT. This is the only 120A circuit breaker allowed on the ROBOT.

Examples considered not “quickly and safely accessible” include breakers covered by an access panel or door, or mounted on, underneath or immediately adjacent to moving COMPONENTS.

It is strongly recommended that the 120A circuit breaker location be clearly and obviously labeled so it can be easily found by FIELD STAFF during a MATCH.

- R51.** The PDP, associated wiring, and all circuit breakers must be easily visible for Inspection.
- R52.** Any active electrical item that is not an actuator (specified in R34) or core Control System item (specified in R73) is considered a CUSTOM CIRCUIT. CUSTOM CIRCUITS shall not produce voltages exceeding 24V.
- R53.** The roboRIO power input must be connected to the dedicated supply terminals on the PDP shown in Figure 10-10. No other electrical load shall be connected to these terminals.

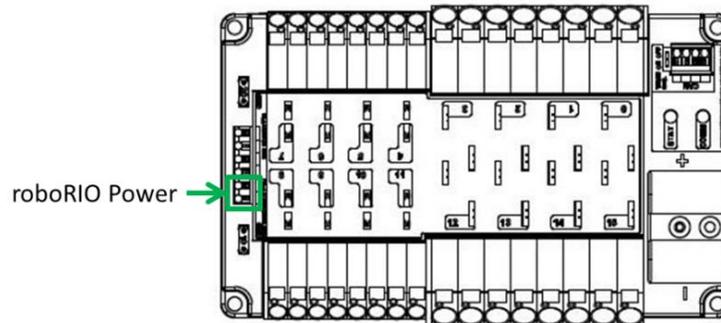


Figure 10-10 roboRIO power source

- R54.** The Wireless Bridge (Radio) power must be supplied directly by the 12V 2A output of a CTR Electronics Voltage Regulator Module (VRM) (P/N: am-2857, 217-4245) and must be the only load connected to those terminals.



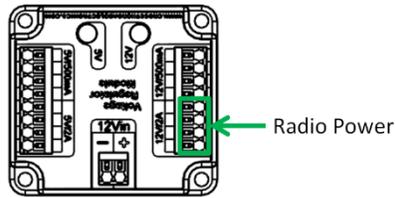


Figure 10-11 Radio power source

Note that this wiring is different from the wiring for the radio used in 2015, but is identical to the wiring from 2016-2018. When using a 2015 VRM with the OM5P-AN or OM5P-AC radio, the radio should be connected as described above, not to the terminals labeled “Radio”.

Note that this prohibits using any active POE Injector device to power the radio but does not prohibit using any PASSIVE CONDUCTORS to inject the VRM power into an Ethernet cable plugged into the radio port labeled “18-24v POE”.

- R55.** The VRM supplying power to the Wireless Bridge per R54 must be connected to the designated supply terminals at the end of the PDP, and not the main WAGO connectors along the sides of the PDP as shown in Figure 10-12. With the exception of a single CTR Electronics Pneumatics Control Module (PCM, P/N: am-2858), no other electrical load shall be connected to these PDP terminals.

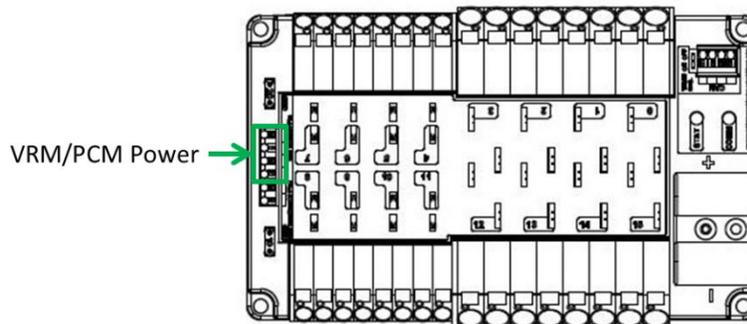


Figure 10-12 VRM and PCM power source

Please reference [Wiring the FRC Control System](#) for Wireless Bridge wiring information.

- R56.** Only one wire shall be connected to each WAGO connector on the PDP.

If multi-point distribution of circuit power is needed (e.g. to provide power to multiple PCMs and/or VRMs from one 20A circuit), then all incoming wires may be appropriately spliced into the main lead (e.g. using an insulated terminal block, crimped splice or soldered wire splice), and the single main lead inserted into the WAGO connector to power the circuit.

- R57.** The only circuit breakers permitted for use in the PDP are:

- A. Snap Action VB3-A Series, terminal style F57
- B. Snap Action MX5-A or MX5-L Series, 40A rating or lower



- R58.** The fuses in the PDP shall only be replaced with functionally identical fuses (mini automotive blade fuses with values matching those printed on the PDP).
- R59.** Each branch circuit must be protected by one and only one circuit breaker on the PDP per Table 10-3. No other electrical load can be connected to the breaker supplying this circuit.

Table 10-3 Branch circuit protection requirements

Branch Circuit	Circuit Breaker Value	Quantity Allowed Per Breaker
Motor Controller	Up to 40A	1
CUSTOM CIRCUIT	Up to 40A	1
Fans permitted per Table 10-1 and not already part of COTS computing devices	Up to 20A	No limit
Spike Relay Module	Up to 20A	1
Automation Direct Relay 12A (*6M12*)	Up to 10A	1
Automation Direct Relay 25A (*6M25*)	Up to 20A	1
Automation Direct Relay 40A (*6M40*)	Up to 40A	1
PCM – with compressor	20A	1
Additional VRM (non-radio)/Additional PCM (non-compressor)	20A	3 total

R59 does not prohibit the use of smaller value breakers in the PDP or any fuses or breakers within CUSTOM CIRCUITS for additional protection.

- R60.** All circuits shall be wired with appropriately sized insulated copper wire (SIGNAL LEVEL cables don't have to be copper):

Table 10-4 Breaker and Wire Sizing

Application	Minimum Wire Size
31 – 40A protected circuit	12 AWG (13 SWG or 4 mm ²)
21 – 30A protected circuit	14 AWG (16 SWG or 2.5 mm ²)
6 – 20A protected circuit Between the PDP dedicated terminals and the VRM or PCM Compressor outputs from the PCM	18 AWG (19 SWG or 1 mm ²)
Between the PDP and the roboRIO ≤5A protected circuit	22 AWG (22 SWG or 0.5 mm ²)
VRM 2A circuits	24 AWG (24 SWG or .25mm ²)
roboRIO PWM port outputs	26 AWG (27 SWG or 0.14 mm ²)
SIGNAL LEVEL circuits (i.e. circuits which draw ≤1A continuous and have a source incapable of delivering >1A, including but not limited to roboRIO non-PWM outputs, CAN signals, PCM Solenoid outputs, VRM 500mA outputs and Arduino outputs)	28 AWG (29 SWG or .08 mm ²)



Wires that are recommended by the device manufacturer or originally attached to legal devices are considered part of the device and by default legal. Such wires are exempt from R60.

- R61.** Branch circuits may include intermediate elements such as COTS connectors, splices, COTS flexible/rolling/sliding contacts, and COTS slip rings, as long as the entire electrical pathway is via appropriately gauged/rated elements.
- R62.** All non-SIGNAL LEVEL wiring with a constant polarity (i.e., except for outputs of relay modules, motor controllers, or sensors) shall be color-coded along their entire length from the manufacturer as follows:
- A.** Red, yellow, white, brown, or black-with-stripe on the positive (e.g. +24VDC, +12VDC, +5VDC, etc.) connections
 - B.** Black or blue for the common or negative side (-) of the connections.

Wires that are originally attached to legal devices are considered part of the device and by default legal. Ethernet cable used in POE cables may use a different color standard. Such wires are exempt from R62.

- R63.** CUSTOM CIRCUITS shall not directly alter the power pathways between the ROBOT battery, PDP, motor controllers, relays (per R36-B), motors and actuators (per R34), pneumatic solenoid valves, or other elements of the ROBOT control system (items explicitly mentioned in R73). Custom high impedance voltage monitoring or low impedance current monitoring circuitry connected to the ROBOT'S electrical system is acceptable, if the effect on the ROBOT outputs is inconsequential.

A noise filter may be wired across motor leads or PWM leads. Such filters will not be considered CUSTOM CIRCUITS and will not be considered a violation of R63 or R80.

Acceptable signal filters must be fully insulated and must be one of the following:

- A one microfarad (1 μ F) or less, non-polarized, capacitor may be applied across the power leads of any motor on your ROBOT (as close to the actual motor leads as reasonably possible).
- A resistor may be used as a shunt load for the PWM control signal feeding a servo.

10.8 CONTROL, COMMAND & SIGNALS SYSTEM

- R64.** ROBOTS must be controlled via one (1) programmable National Instruments roboRIO (P/N: am3000), with image version FRC_roboRIO_2019_v14 or later.

There are no rules that prohibit co-processors, provided commands originate from the roboRIO to enable and disable all power regulating devices. This includes motor controllers legally wired to the CAN-bus.

- R65.** One (1) OpenMesh Wireless Bridge (P/N: OM5P-AN or OM5P-AC), that has been configured with the appropriate encryption key for your team number at each event, is the only permitted device for communicating to and from the ROBOT during the MATCH.
- R66.** The roboRIO Ethernet PORT must be connected to the Wireless Bridge PORT labeled "18-24 vPOE," closest to the power connector (either directly, via a network switch, or via a CAT5 Ethernet pigtail).

Note: Placing a switch between the roboRIO and radio may impede the ability for FIELD STAFF to troubleshoot roboRIO connection issues on the FIELD. Teams may be asked to try directly connecting from the radio to roboRIO as part of troubleshooting efforts.



R67. Communication between the ROBOT and the OPERATOR CONSOLE is restricted as follows:

A. Network ports:

- i. HTTP 80: Camera connected via switch on the ROBOT, bi-directional
- ii. HTTP 443: Camera connected via switch on the ROBOT, bi-directional
- iii. UDP/TCP 554: Real-Time Streaming Protocol for h.264 camera streaming, bi-directional
- iv. UDP 1130: Dashboard-to-ROBOT control data, uni-directional
- v. UDP 1140: ROBOT-to-Dashboard status data, uni-directional
- vi. UDP/TCP 1180-1190: Camera data from the roboRIO to the Driver Station when the camera is connected the roboRIO via USB, bi-directional.
- vii. TCP/UDP 1250: CTRE Diagnostics Server, bi-directional
- viii. TCP 1735: SmartDashboard, bi-directional
- ix. UDP/TCP 5800-5810: Team Use, bi-directional

Teams may use these ports as they wish if they do not employ them as outlined above (i.e. TCP 1180 can be used to pass data back and forth between the ROBOT and the DS if the team chooses not to use the camera on USB).

B. Bandwidth: no more than 4 Mbits/second.

Note that the 4 Mbit limit will be strictly enforced by the Wireless Bridge.

The [FMS Whitepaper](#) has more details on how to check and optimize bandwidth usage.

While *FIRST* makes every effort to provide a wireless environment that allows teams access to a full 4 Mbits/second data rate (with about 100 Kbit used for ROBOT control and status), at some events wireless conditions may not accommodate this.

R68. The roboRIO, DRIVER Station software, and Wireless Bridge must be configured to correspond to the correct team number, per the procedures defined in [Getting Started with the 2019 Control System](#).

R69. All signals must originate from the OPERATOR CONSOLE and be transmitted to the ROBOT via the ARENA Ethernet network.

R70. No form of wireless communication shall be used to communicate to, from, or within the ROBOT, except those required per R65 and R69.

Devices that employ signals in the visual spectrum (e.g. cameras) and non-RF sensors that don't receive human-originated commands (e.g. "beam break" sensors or IR sensors on the ROBOT used to detect FIELD elements) aren't wireless communication devices and thus R70 doesn't apply.

R71. The Wireless Bridge must be mounted on the ROBOT such that the diagnostic lights are visible to ARENA personnel.

Teams are encouraged to mount the wireless bridge away from noise generating devices such as motors, PCM(s), and VRM(s).

R72. ROBOTS must use at least one (1), but no more than two (2), diagnostic ROBOT Signal Lights (RSL) (P/N: 855PB-B12ME522).

Any RSL must be:



- A. mounted on the ROBOT such that it is easily visible while standing three 3 ft. (~ 100 cm) in front of the ROBOT,
- B. connected to the “RSL” supply terminals on the roboRIO,
- C. wired for solid light operation, by placing a jumper between the “La” and “Lb” terminals on the light per Figure 10-13.

Please see [Wiring the 2019 FRC Control System](#) for connection details.

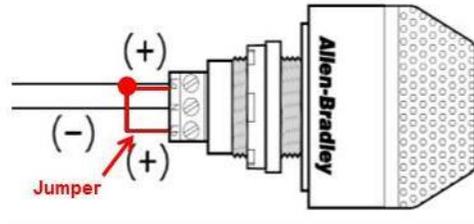


Figure 10-13 RSL jumper wiring

- R73.** The DRIVER Station software, roboRIO, Power Distribution Panel, Pneumatics Control Modules, Voltage Regulator Modules, RSL, 120A breaker, motor controllers, relay modules (per R36-B), Wireless Bridge, and batteries shall not be tampered with, modified, or adjusted in any way (tampering includes drilling, cutting, machining, rewiring, disassembling, painting, etc.), with the following exceptions:

Please note that the DRIVER Station application is a separate application from the Dashboard. The DRIVER Station software may not be modified, while teams are expected to customize their Dashboard code.

- A. User programmable code in the roboRIO may be customized.
- B. Motor controllers may be calibrated as described in owner's manuals.
- C. Fans may be attached to motor controllers and may be powered from the power input terminals.
- D. If powering the compressor, the fuse on a Spike H-Bridge Relay may be replaced with a 20A Snap-Action circuit breaker.
- E. Wires, cables, and signal lines may be connected via the standard connection points provided on the devices.
- F. Fasteners (including adhesives) may be used to attach the device to the OPERATOR CONSOLE or ROBOT or to secure cables to the device.
- G. Thermal interface material may be used to improve heat conduction.
- H. Labeling may be applied to indicate device purpose, connectivity, functional performance, etc.
- I. Jumpers may be changed from their default location.
- J. Limit switch jumpers may be removed from a Jaguar motor controller and a custom limit switch circuit may be substituted.
- K. Device firmware may be updated with manufacturer supplied firmware.
- L. Integral wires on motor controllers may be cut, stripped, and/or connectorized.
- M. Devices may be repaired, provided the performance and specifications of the device after the repair are identical to those before the repair.
- N. The cover may be removed from the Talon SRX data port.
- O. Electrical tape may be applied to the aluminum plate inside the Wireless Bridge.



- P. The input terminal cover from the Power Distribution Panel may be omitted (no other element may be installed using the threaded holes to install something in place of the PDP terminal cover).

Please note that while repairs are permitted, the allowance is independent of any manufacturer's warranty. Teams make repairs at their own risk and should assume that any warranty or RMA options are forfeited. Be aware that diagnosing and repairing COMPONENTS such as these can be difficult.

For more information about modification O, please see [this article](#).

- R74. Neither 12VDC power nor relay module or motor controller outputs shall be directly connected to the roboRIO (with the exception of the designated 12VDC input).
- R75. Every relay module (per R36-B), servo controller, and PWM motor controller shall be connected to a corresponding port (relays to Relay ports, servo controllers and PWM controllers to PWM ports) on the roboRIO (either directly or through a WCP Spartan Sensor Board) or via a legal MXP connection (per R76). They shall not be controlled by signals from any other source, with the exception of the Nidec Dynamo motor controller which must also be connected to the roboRIO Digital I/O.
- R76. If a motor is controlled via the MXP, its power regulating device must be connected by one of the following methods:
 - A. directly to any PWM pins,
 - B. via a network of PASSIVE CONDUCTORS used to extend the PWM pins, or
 - C. via one approved ACTIVE DEVICE:
 - i. Kauai Labs navX MXP
 - ii. RCAL MXP Daughterboard
 - iii. REV Robotics RIOduino
 - iv. REV Robotics Digit Board
 - v. West Coast Products Spartan Sensor Board
 - vi. Huskie Robotics HUSKIE 2.0 Board

A PASSIVE CONDUCTOR is any device or circuit whose capability is limited to the conduction and/or static regulation of the electrical energy applied to it (e.g. wire, splices, connectors, printed wiring board, etc.).

An ACTIVE DEVICE is any device capable of dynamically controlling and/or converting a source of electrical energy by the application of external electrical stimulus.

The "network of PASSIVE CONDUCTORS" only applies to the pins being used for PWM output to motors or servos. This means that connecting an ACTIVE DEVICE, such as a sensor to one MXP pin does not prevent other MXP pins from being used in accordance with R76-B.

- R77. Each CAN motor controller must be controlled with signal inputs sourced from the roboRIO and passed via either a PWM (wired per R75) or CAN-bus (either directly or daisy-chained via another CAN-bus device) signal, but both shall not be wired simultaneously on the same device.

As long as the CAN bus is wired legally so that the heartbeat from the roboRIO is maintained, all closed loop control features of the CAN motor controller may be used. (That is, commands originating from the roboRIO to configure, enable, and specify an operating point for all CAN motor controller closed loop modes fit the intent of R64).



- R78. Each PCM must be controlled with signal inputs sourced from the roboRIO and passed via a CAN-bus connection from the roboRIO (either directly or daisy-chained via another CAN-bus device).
- R79. The PDP CAN interface must be connected to the CAN-bus on the roboRIO (either directly or daisy-chained via another CAN-bus device).

For documentation on how to wire the CAN-bus connections of the PDP see [Wiring the 2019 FRC Control System](#).

- R80. The CAN-bus must be connected to the roboRIO CAN port.
 - A. Additional switches, sensor modules, CUSTOM CIRCUITS, third-party modules, etc. may also be placed on the CAN-bus.
 - B. No device that interferes with, alters, or blocks communications among the roboRIO and the PDP, PCMs, and/or CAN Motor Controllers on the bus will be permitted.

Only one wire should be inserted into each Weidmuller CAN connector terminal. For documentation on how to wire the CAN-bus connections of the roboRIO, PCM, PDP and CAN motor controllers, see [Wiring the FRC Control System](#).

10.9 PNEUMATIC SYSTEM

In order to maintain safety, the rules in this section apply at all times while at the event, not just while the ROBOT is on the FIELD for MATCHES.

- R81. To satisfy multiple constraints associated with safety, consistency, Inspection, and constructive innovation, no pneumatic parts other than those explicitly permitted in the [Pneumatic System](#) section shall be used on the ROBOT.
- R82. All pneumatic items must be COTS pneumatic devices and either:
 - A. rated by their manufacturers for pressure of at least 125psi (~862 kPa), or
 - B. installed downstream of the primary relieving regulator (see R89), and rated for pressure of at least 70psi (~483 kPa)

Any pressure specification such as “working,” “operating,” “maximum,” etc. may be used to satisfy the requirements of R82.

It is recommended that all pneumatic items be rated by their manufacturers for a working pressure of at least 60 psi (~414 kPa).

- R83. All pneumatic COMPONENTS must be used in their original, unaltered condition. Exceptions are as follows:
 - A. tubing may be cut,
 - B. wiring for pneumatic devices may be modified to interface with the control system,
 - C. assembling and connecting pneumatic COMPONENTS using the pre-existing threads, mounting brackets, quick-connect fittings, etc.,
 - D. removing the mounting pin from a pneumatic cylinder, provided the cylinder itself is not modified,
 - E. labeling applied to indicate device purpose, connectivity, functional performance, etc.

Do not, for example, paint, file, machine, or abrasively remove any part of a pneumatic COMPONENT – this would cause the part to become a prohibited item. Consider pneumatic COMPONENTS sacred.



R84. The only pneumatic system items permitted on ROBOTS include the items listed below.

A. Pneumatic pressure vent plug valves functionally equivalent to those provided in the KOP,

Parker valves PV609-2 or MV709-2 are recommended.

B. Pressure relief valves functionally equivalent to those provided in the KOP,

Norgren 16-004-011, 16-004-003 or McMaster-Carr 48435K714 recommended.

To be considered functionally equivalent the valve must be preset or adjustable to 125 psi (~862 kPa) and capable of relieving at least 1 scfm (~472 cm³/s).

C. Solenoid valves with a maximum 1/8 in. (nominal, ~3 mm) NPT, BSPP, or BSPT port diameter or integrated quick connect 1/4 in. (nominal, ~6mm) outside diameter tubing connection,

D. Additional pneumatic tubing, with a maximum 1/4 in. (nominal, ~6 mm) outside diameter,

E. Pressure transducers, pressure gauges, passive flow control valves (specifically “needle valve”), manifolds, and connecting fittings (including COTS pneumatic U-tubes),

F. Check and quick exhaust valves, provided that the requirements of R93-A are still met.

G. Shutoff valves which relieve downstream pressure to atmosphere when closed (may also be known as 3-way or 3-way exhausting valves).

H. Pressure regulators with the maximum outlet pressure adjusted to no more than 60 psi (~413 kPa),

I. Pneumatic cylinders, pneumatic linear actuators, and rotary actuators,

J. Pneumatic storage tanks (with the exception of White Clippard tanks P/N: AVT-PP-41),

K. One (1) compressor that is compliant with R86,

L. Debris or coalescing (water) filters, and

M. Venturi valves (note: the high-pressure side of a Venturi valve is considered a pneumatic device and must follow all pneumatic rules. The vacuum side of a Venturi valve is exempt from the pneumatic rules per “a” in the Blue Box below).

The following devices are not considered pneumatic devices and are not subject to pneumatic rules (though they must satisfy all other rules):

- a. a device that creates a vacuum
- b. closed-loop COTS pneumatic (gas) shocks
- c. air-filled (pneumatic) wheels
- d. pneumatic devices not used as part of a pneumatic system (i.e. used in a way that does not allow them to contain pressurized air)

R85. If pneumatic COMPONENTS are used, the following items are required as part of the pneumatic circuit and must be used in accordance with this section, as illustrated in Figure 10-14.

A. One (1) *FIRST* Robotics Competition legal compressor (per R86)

B. Pressure relief valve (per R84-B) connected via legal rigid fittings (e.g. brass, nylon, etc.)

C. Nason pressure switch, P/N SM-2B-115R/443

D. At least one pressure vent plug

E. Stored pressure gauge (upstream from Primary Regulator, must show psi or kPa)

F. Working pressure gauge (downstream from Primary Regulator, must show psi or kPa)

G. Working pressure regulator



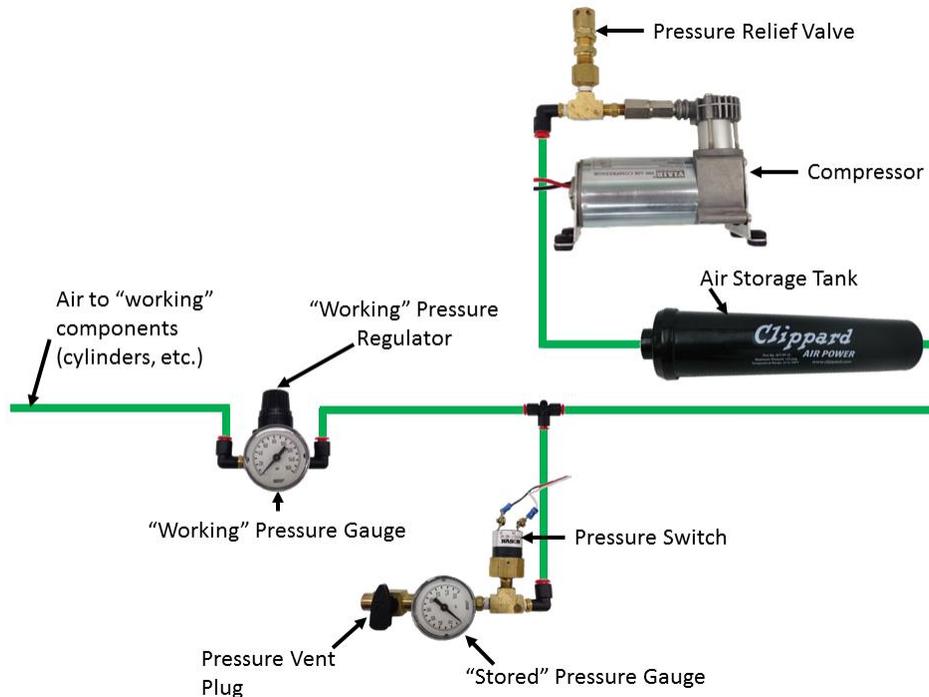


Figure 10-14 Pneumatic circuitry

- R86.** Throughout an event, compressed air on the ROBOT must be provided by its one onboard compressor only. Compressor specifications must not exceed nominal 1.10 cfm (~519 cm³/s) flow rate @ 12VDC.

A ROBOT'S compressor may be substituted by another compressor, but a ROBOT may only have one designated compressor at a time, and all compressed air on the ROBOT must be sourced from a single compressor.

- R87.** Stored air pressure on the ROBOT must be no greater than 120 psi (~827 kPa). No stored air pressure intended for the ROBOT may be located off-board the ROBOT.
- R88.** Working air pressure (air pressure used to actuate devices) on the ROBOT must be no greater than 60 psi (~413 kPa) and must be provided through a single primary adjustable, relieving, pressure regulator.

Norgren regulator P/N: R07-100-RNEA or Monnier P/N: 101-3002-1 recommended.

- R89.** Only the compressor, relief valve, pressure switch, pressure vent plug, pressure gauge, storage tanks, tubing, pressure transducers, filters, and connecting fittings may be in the high-pressure pneumatic circuit upstream from the regulator.

It is recommended that all COMPONENTS in the high-pressure pneumatic circuit upstream from the regulator be rated for at least 115 psi (~793 kPa) working pressure.

- R90.** Pressure gauges must be placed in easily visible locations upstream and downstream of the regulator to display the stored and working pressures.
- R91.** The relief valve must be attached directly to the compressor or attached by legal hard fittings (e.g. brass, nylon, etc.) connected to the compressor output port.



Teams are required to check and/or adjust the relief valve to release air at 125 psi (~861 kPa). The valve may or may not have been calibrated prior to being supplied to teams.

- R92.** The pressure switch requirements are:
- A.** It must be Nason P/N: SM-2B-115R/443
 - B.** It must be connected to the high-pressure side of the pneumatic circuit (i.e. prior to the pressure regulator) to sense the stored pressure of the circuit.
 - C.** The two wires from the pressure switch must be connected directly to the pressure switch input of the PCM controlling the compressor or, if controlled using the roboRIO and a relay, to the roboRIO.
 - D.** If connected to the roboRIO, the roboRIO must be programmed to sense the state of the switch and operate the relay module that powers the compressor to prevent over-pressuring the system.

- R93.** Any pressure vent plug must be:
- A.** connected to the pneumatic circuit such that, when manually operated, it will vent to the atmosphere to relieve all stored pressure in a reasonable amount of time, and
 - B.** placed on the ROBOT so that it is visible and easily accessible.

- R94.** The outputs from multiple solenoid valves must not be plumbed together.

10.10 OPERATOR CONSOLE

- R95.** The DRIVER Station software provided on the [National Instruments website](#) is the only application permitted to specify and communicate the operating mode (i.e. Autonomous/Teleoperated) and operating state (Enable/Disable) to the ROBOT. The DRIVER Station software must be revision 19.0 or newer.

Teams are permitted to use a portable computing device of their choice (laptop computer, tablet, etc.) to host the DRIVER Station software while participating in competition MATCHES.

- R96.** The OPERATOR CONSOLE, the set of COMPONENTS and MECHANISMS used by the DRIVERS and/or HUMAN PLAYER to relay commands to the ROBOT, must include a graphic display to present the DRIVER Station diagnostic information. It must be positioned within the OPERATOR CONSOLE so that the screen display can be clearly seen during Inspection and in a MATCH.
- R97.** Devices hosting the DRIVER Station software must only interface with the Field Management System (FMS) via the Ethernet cable provided at the PLAYER STATION (e.g. not through a switch). Teams may connect the FMS Ethernet cable to their DRIVER Station device directly via an Ethernet pigtail, or with a single-port Ethernet converter (e.g. docking station, USB-Ethernet converter, Thunderbolt-Ethernet converter, etc.). The Ethernet port on the OPERATOR CONSOLE must be easily and quickly accessible.

Teams are strongly encouraged to use pigtails on the Ethernet port used to connect to the FMS. Such pigtails will reduce wear and tear on the device's port and, with proper strain relief employed, will protect the port from accidental damage.

- R98.** The OPERATOR CONSOLE must not
- A.** be longer than 60 in. (~152 cm)
 - B.** be deeper than 14 in. (~35 cm) (excluding any items that are held or worn by the DRIVERS during the MATCH)



- C. extend more than 6 ft. 6 in. (~198 cm) above the floor
- D. attach to the FIELD (except as permitted by G15)

There is a 54 in. (~137 cm) long by 2 in. (nominal) wide strip of hook-and-loop tape (“loop” side) along the center of the PLAYER STATION support shelf that should be used to secure the OPERATOR CONSOLE to the shelf, per G15. See the [PLAYER STATION](#) section for details.

Please note that while there is no hard weight limit, OPERATOR CONSOLES that weigh more than 30 lbs. (~13 kg.) will invite extra scrutiny as they are likely to present unsafe circumstances.

- R99.** Other than the system provided by the FIELD, no other form of wireless communications shall be used to communicate to, from, or within the OPERATOR CONSOLE.

Examples of prohibited wireless systems include, but are not limited to, active wireless network cards and Bluetooth devices. For the case of the *FIRST* Robotics Competition, a motion sensing input device (e.g. Microsoft Kinect) is not considered wireless communication and is allowed.

- R100.** OPERATOR CONSOLES shall not be made using hazardous materials, be unsafe, cause an unsafe condition, or interfere with other DRIVE TEAMS or the operation of other ROBOTS.



11 INSPECTION & ELIGIBILITY RULES

This section describes the rules governing MATCH participation. A team has participated in a MATCH if any member of their DRIVE TEAM is in the ALLIANCE STATION, with or without the ROBOT on the FIELD, at the start of the MATCH.

At each event, the Lead ROBOT Inspector (LRI) has final authority on the legality of any COMPONENT, MECHANISM, or ROBOT. Inspectors may re-Inspect ROBOTS to ensure compliance with the rules.

ROBOTS are permitted to participate in scheduled Practice MATCHES prior to passing Inspection. However, the *FIRST* Technical Advisor (FTA), LRI, or Head REFEREE may determine at any time that the ROBOT is unsafe, per the [Safety Rules](#) section, and may prohibit further participation in Practice MATCHES until the condition is corrected and/or the ROBOT passes Inspection.

Prior to the start of a MATCH, any ROBOT which is unable or ineligible to participate in that MATCH as determined by the FTA, LRI, or Head REFEREE is declared to be BYPASSED and is DISABLED. A team whose ROBOT is BYPASSED remains eligible to receive Qualification Ranking Points or Playoff MATCH points provided that its ROBOT has passed Inspection, per I2.

- I1. The ROBOT must be built by the team to play DESTINATION: DEEP SPACE.** The ROBOT is an electromechanical assembly built by the *FIRST* Robotics Competition team to perform specific tasks when competing in DESTINATION: DEEP SPACE Presented By The Boeing Company. The ROBOT must include all of the basic systems required to be an active participant in the game – power, communications, control, BUMPERS, and movement. The ROBOT implementation must obviously follow a design approach intended to play DESTINATION: DEEP SPACE (e.g. a box of unassembled parts placed on the FIELD, or a ROBOT designed to play a different game, does not satisfy this definition).

I1 requires that the ROBOT a team uses in competition was built by that team, but isn't intended to prohibit assistance from other teams (e.g. fabricating elements, supporting construction, writing software, developing game strategy, contributing COMPONENTS and/or MECHANISMS, etc.)

- I2. Get inspected before playing a Qualification/Playoff MATCH.** A team is only permitted to participate in a Qualification or Playoff MATCH and receive Ranking or MATCH Points respectively if their ROBOT has passed an initial, complete Inspection.

Violation: If prior to the start of the MATCH, the team is not eligible to participate in the MATCH. If after the start of the MATCH, the entire ALLIANCE receives a RED CARD for that MATCH.

Please take note of this rule. It is important that *FIRST* Robotics Competition teams ensure their ALLIANCE partners have passed Inspection. Allowing a partner that has not passed Inspection to play puts the ALLIANCE at risk of RED CARDS. Teams should check with their ALLIANCE partners early and help them pass Inspection before competing.

- I3. Bring it all to Inspection.** At the time of Inspection, the ROBOT must be presented with all MECHANISMS (including all COMPONENTS of each MECHANISM), configurations, and decorations that will be used on the ROBOT without re-inspection. It is acceptable, however, for a ROBOT to play MATCHES with a subset of the MECHANISMS that were present during Inspection. Only MECHANISMS that were present during the Inspection may be added, removed or reconfigured between MATCHES. If MECHANISMS are changed between MATCHES, the reconfigured ROBOT must still meet all Inspection criteria.



14. Unless the change is listed below, any change to a ROBOT must get re-inspected. If a ROBOT is modified after it has passed its most recent Inspection, that ROBOT must be re-inspected before the ROBOT is eligible to participate in a MATCH. Exceptions are listed in A through F (unless they result in a significant change to the ROBOT'S size, weight, legality, or safety).

- A.** addition, relocation, or removal of fasteners (e.g. cable ties, tape, and rivets)
- B.** addition, relocation, or removal of labeling or marking
- C.** revision of ROBOT code
- D.** replacement of a COTS COMPONENT with an identical COTS COMPONENT
- E.** replacement of a MECHANISM with an identical MECHANISM (size, weight, material)
- F.** additions, removals, or reconfiguration of ROBOT with a subset of MECHANISMS already inspected per I2.

When in doubt, the team should ask to be re-inspected.

Inspectors prioritize ROBOTS that have not yet completed initial inspection over ROBOT changes.

While every effort will be made to re-inspect teams in a timely manner, teams need to consider that they may need to play with the previously inspected configuration if re-inspection cannot be completed before a MATCH. Teams should work with Inspectors when making changes to minimize the chance of this occurring.

Example 1: Team A's ROBOT has passed Inspection, but burns out a motor controller during a MATCH. Team A replaces it with an identical motor controller. Team A does not have to get their ROBOT re-inspected per exception I4-D.

Example 2: Team B would like to add weight to their ROBOT to lower their center of gravity. Team B adds a large amount of fasteners to their ROBOT as ballast. Team B must get their ROBOT re-inspected because they have significantly changed their weight per I4.

Example 3: Team D has decided to move their motor controller to a different location on their ROBOT, and must use a different length wire to make the proper connections. Team D must get their ROBOT re-inspected because rewiring is not an exception in I4.

Example 4: Team E decides to relocate their battery on their ROBOT to change their center of gravity. Team E must be re-inspected as the relocation of COMPONENTS or MECHANISMS is not an exception I4.

Example 5: Team F realizes they can gain necessary functionality by building a new MECHANISM at an event and adding it to their ROBOT. Their ROBOT must be re-inspected.

If an observation is made that another team's ROBOT may be in violation of the ROBOT rules, please approach *FIRST* officials to review the matter in question. This is an area where *Gracious Professionalism* is very important.

15. Document your costs. A Bill of Materials (BOM), listing all items on the ROBOT except those listed in R12 and their relevant costs per the [Budget Constraints & Fabrication Schedule](#) section, must be presented at the time of Inspection.



Teams are encouraged to use the [BOM Template](#) posted on the *FIRST* website. Please note that while BOMs must be shown to Inspectors, teams are not required to submit their BOMs to the Inspectors.

- 16. ROBOTS are off for Inspection, mostly.** For the safety of all those involved, Inspections must take place with the ROBOT powered off, pneumatics unpressurized, and springs or other stored energy devices in their lowest potential energy states (e.g. battery removed).

Power and air pressure should only be enabled on the ROBOT during those portions of the Inspection process where it is absolutely required to validate certain system functionality and compliance with specific rules (firmware check, etc.). Inspectors may allow the ROBOT to be powered beyond the parameters above if both criteria below are met.

- A.** The ROBOT design requires power or a charged stored energy device in order to confirm that the ROBOT meets volume requirements, and
- B.** The team has included safety interlocks that mitigate unexpected release of such stored energy.

The team may be asked to demonstrate these interlocks during the inspection process.

- 17. No student, no Inspection.** At least one student team member must accompany the ROBOT for any Inspection efforts.

Exceptions may be made for major conflicts, e.g. religious holidays, major testing, transportation issues, etc.



12 TOURNAMENTS

Each 2019 *FIRST* Robotics Competition event is played in a tournament format. Each tournament consists of three sets of MATCHES called Practice MATCHES (not necessarily played at all District Events), Qualification MATCHES, and Playoff MATCHES.

Practice MATCHES provide each team with an opportunity to operate its ROBOT on the FIELD prior to the start of the Qualification MATCHES.

Qualification MATCHES allow each team to earn a seeding position that may qualify them for participation in the Playoff MATCHES.

Playoff MATCHES determine the event Champions.

12.1 MATCH SCHEDULES

A MATCH schedule is used to coordinate MATCHES at an Event. Figure 12-1 details information shown on each schedule.

Qualification Match Schedule

Event Name								
Matches Per Team		10	ALLIANCE Red or Blue			PLAYER STATION number 1, 2, or 3		
Time	Description	Match	Blue 1	Blue 2	Blue 3	Red 1	Red 2	Red 3
Thu 2:30	Qualification 1	1	1	2	3	4	5	6
Thu 2:37	Qualification 2	2	7	8	9	10	11*	12
Thu 2:44	Qualification 3	3	13	14	15*	16	17	18

Asterisk (*) indicates SURROGATE MATCH

Figure 12-1 Sample MATCH Schedule

12.2 REFEREE INTERACTION

The Head REFEREE has the ultimate authority in the ARENA during the event, but may receive input from additional sources, e.g. Game Designers, *FIRST* personnel, FTA, and technical staff. The Head REFEREE rulings are final. No event personnel, including the Head REFEREE, will review video, photos, artistic renderings, etc. of any MATCH, from any source, under any circumstances.

If a DRIVE TEAM needs clarification on a ruling or score, per C9, one (1) pre-college student from that DRIVE TEAM should address the Head REFEREE after the ARENA Reset Signal (e.g. FIELD lights turn green). A DRIVE TEAM member signals their desire to speak with the Head REFEREE by standing in the corresponding Red or Blue Question Box, which are located on the floor near each end of the scoring table. Depending on timing, the Head REFEREE may postpone any requested discussion until the end of the subsequent MATCH as necessary.

While FMS tracks quantities of FOULS, *FIRST* instructs REFEREES to not self-track details about FOULS; as a result, we don't expect REFEREES to recall details about what FOULS were made, when they occurred, and against whom.

Any reasonable question is fair game in the Question Box, and Head REFEREES will do good faith efforts to provide helpful feedback (e.g. how/why certain FOULS are being called, why a particular ROBOT may be susceptible to certain FOULS based on its



design or game play, how specific rules are being called or interpreted), but please know that they will likely not be able to supply specific details

12.2.1 YELLOW AND RED CARDS

In addition to rule violations explicitly listed throughout the **2019 Game and Season Manual**, YELLOW CARDS and RED CARDS are used in *FIRST* Robotics Competition to address team and ROBOT behavior that does not align with the mission, values, and culture of *FIRST*.

As noted in the [Rule Violations](#) section and C1, the Head REFEREE may assign a YELLOW CARD as a warning, or a RED CARD for DISQUALIFICATION in MATCH for egregious behavior inappropriate at a *FIRST* Robotics Competition event.

T1. Egregious or repeated violations of any rule or procedure during the event is prohibited.

Violation: The Head REFEREE may assign a YELLOW CARD as a warning, or a RED CARD for DISQUALIFICATION in MATCH.

A YELLOW or RED CARD is indicated by the Head REFEREE standing in front of the team's PLAYER STATION and holding a YELLOW and/or RED CARD in the air.

YELLOW CARDS are additive, meaning that a second YELLOW CARD is automatically converted to a RED CARD. A team is issued a RED CARD for any subsequent incident in which they receive an additional YELLOW CARD, including earning a second YELLOW CARD during a single MATCH. A second YELLOW CARD is indicated by the Head REFEREE standing in front of the team's PLAYER STATION and holding a YELLOW CARD and RED CARD in the air simultaneously after the completion of the MATCH. A team that has received either a YELLOW CARD or a RED CARD carries a YELLOW CARD into subsequent MATCHES, except as noted below. A RED CARD results in DISQUALIFICATION.

Once a team receives a YELLOW or RED CARD, its team number will be presented with a yellow background on the audience screen at the beginning of all subsequent MATCHES, including any replays, as a reminder to the team, the REFEREES, and the audience that they carry a YELLOW CARD.

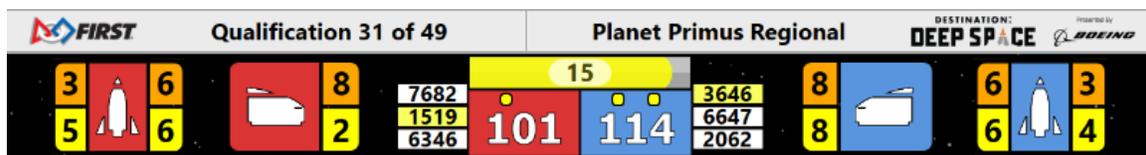


Figure 12-2 Audience Screen Graphic Showing YELLOW CARD Indicators

All YELLOW CARDS are cleared in FMS at the conclusion of Practice, Qualification, Sub-Division Playoff, and Division Playoff MATCHES. The Head REFEREE may opt to perpetuate a YELLOW CARD earned during Practice MATCHES through to Qualification MATCHES for particularly egregious behavior.

During the Playoff MATCHES, a team receives a YELLOW or RED CARD for their entire ALLIANCE. If two (2) YELLOW CARDS are accrued by an ALLIANCE, the entire ALLIANCE is issued a RED CARD. A RED CARD results in zero (0) points for that MATCH, and the ALLIANCE loses the MATCH. If both ALLIANCES receive RED CARDS, the ALLIANCE which committed the action earning the RED CARD first chronologically loses the MATCH.

YELLOW and RED CARDS are applied based on the following:



Table 12-1 YELLOW and RED CARD application

Time YELLOW or RED CARD earned:	MATCH to which CARD is applied:
prior to the start of Qualification MATCHES	Team's first Qualification MATCH
during the Qualification MATCHES	Team's current (or just-completed) MATCH. In the case where the team participated as a SURROGATE in the current (or just completed) MATCH, the card is applied to the team's previous MATCH (i.e. the team's second Qualification MATCH.)
between the end of Qualification MATCHES and the start of Playoff MATCHES	ALLIANCE'S first Playoff MATCH
during the Playoff MATCHES	ALLIANCE'S current (or just-completed) MATCH.

12.3 MATCH REPLAYS

Over the course of the Tournament it may be necessary for a MATCH to be replayed. Typical causes for replays are MATCHES that end in a tie during the Playoffs, MATCHES that are stopped because FIELD STAFF anticipated FIELD damage or personal injury, or if there is an ARENA FAULT. An ARENA FAULT is an error in ARENA operation that includes, but is not limited to:

- A. broken FIELD elements due to
 - a. normal, expected game play or
 - b. ROBOT abuse of FIELD elements that affects the outcome of the MATCH for their opponents.

A broken FIELD element caused by ROBOT abuse that affects the outcome of the MATCH for their ALLIANCE is not an ARENA FAULT.

- B. power failure to a portion of the FIELD (tripping the circuit breaker in the PLAYER STATION is not considered a power failure)
- C. improper activation by the FMS
- D. errors by FIELD STAFF (except those listed in the [Other Logistics](#) section)

If, in the judgment of the Head REFEREE, an ARENA FAULT occurs that affects the outcome of the MATCH and any team on the affected ALLIANCE desires a replay, the MATCH will be replayed.

The outcome of the MATCH is affected if an error occurs that, in the judgement of the Head REFEREE changes which ALLIANCE would have won the MATCH and/or the assignment of Ranking Points.

All reasonable effort is made to create the same conditions when replaying a MATCH. This means, for example, that a team that was BYPASSED prior to the start of the MATCH which is to be replayed, is BYPASSED for the replay MATCH.

Note that an ARENA FAULT that does not affect MATCH outcome in the judgement of the Head REFEREE does not lead to a MATCH replay. Examples include, but are not limited to:

- a. a piece of FIELD plastic falls into the FIELD, far away from any human or ROBOT activity, and in such a way that it does not affect MATCH outcome
- b. delay in the playing of an ARENA sound
- c. mismatch between the timer on the Audience Screen and the ARENA Timer



- d. any adjustment or delay in assignment of a penalty (including those made after the MATCH)

12.4 MEASUREMENT

At each event, the ARENA will be open for at least thirty (30) minutes prior to the start of Qualification MATCHES, during which time teams may survey and/or measure the ARENA and bring ROBOTS on the FIELD to perform sensor calibration. The specific time that the FIELD is open will be communicated to teams at the event. Teams may bring specific questions or comments to the FTA.

- T2. Freeze, ROBOT.** During the period when the ARENA is open for measurement, ROBOTS can be enabled, but cannot move, nor can they interact with (e.g. shoot, push, pickup, etc.) GAME PIECES, HAB PLATFORMS, ROCKETS, CARGO SHIPS, or other FIELD elements.

Violation: Verbal warning. If repeated at any point during the event or egregious YELLOW CARD.

12.5 PRACTICE MATCHES

Practice MATCHES are played before Qualification Matches. The Practice MATCH schedule is available as soon as possible, but no later than the start of Practice MATCHES. For Regional events, it will also be published and available online at the [FIRST Robotics Event Results site](#), except during exceptional circumstances. Practice MATCHES are randomly assigned, and teams may not switch scheduled Practice MATCHES. Each team is assigned an equal number of Practice MATCHES unless the number of teams multiplied by number of Practice MATCHES is not divisible by six. In this case, the Field Management System (FMS) randomly selects some teams to play an extra Practice MATCH.

Practice MATCHES are not guaranteed at District Events due to event schedule constraints.

12.5.1 FILLER LINE

A Filler Line is used to fill open slots at events that employ scheduled Practice MATCHES or all slots at events with an open Practice MATCH schedule. Teams from the Filler Line are used on a first come, first served basis to fill empty spots in Practice MATCHES left by other teams that do not report to Queueing. The number of teams in the Filler Line is dependent upon space at venues.

Teams wanting additional Practice MATCHES may not join the Filler Line unless all criteria listed below are met:

- A. ROBOTS in the Filler Line must have passed Inspection (this requirement may be waived for events with open Practice MATCH schedules);
- B. DRIVE TEAMS must join the Filler Line with their ROBOT;
- C. Teams may not work on their ROBOT while in the Filler Line;
- D. Teams may not occupy more than one spot in the Filler Line; and
- E. If a team is queued for their Practice MATCH, they may not also join the Filler Line.

12.6 QUALIFICATION MATCHES

12.6.1 SCHEDULE

The Qualification MATCH schedule is made available as soon as possible, but no later than one (1) hour before Qualification MATCHES are scheduled to begin. Teams receive one (1) hard copy and it is available at the [FIRST Robotics Event Results site](#), except during exceptional circumstances. Each Qualification schedule consists of a series of rounds in which each team plays one (1) MATCH per round.



12.6.2 MATCH ASSIGNMENT

FMS assigns each team two (2) ALLIANCE partners for each Qualification MATCH using a predefined algorithm, and teams may not switch Qualification MATCH assignments. The algorithm employs the following criteria, listed in order of priority:

1. maximize time between each MATCH played for all teams
2. minimize the number of times a team plays opposite any team
3. minimize the number of times a team is allied with any team
4. minimize the use of SURROGATES (teams randomly assigned by the FMS to play an extra Qualification MATCH)
5. provide even distribution of MATCHES played on Blue and Red ALLIANCE
6. provide even distribution of MATCHES played in each PLAYER STATION number.

All teams are assigned the same number of Qualification MATCHES, equal to the number of rounds, unless the number of teams multiplied by number of MATCHES is not divisible by six. In this case, the FMS randomly selects some teams to play an extra MATCH. For the purpose of seeding calculations, those teams are designated as SURROGATES for the extra MATCH. If a team plays a MATCH as a SURROGATE, it is indicated on the MATCH schedule, it is always their third Qualification MATCH, and the outcome of the MATCH has no effect on the team's ranking. YELLOW and RED CARDS assigned to SURROGATES, however, do carry forward to subsequent MATCHES.

12.6.3 QUALIFICATION RANKING

Ranking Points (RP) are units credited to a team based on their ALLIANCE'S performance in Qualification MATCHES. Ranking Points are awarded to each eligible team at the completion of each Qualification MATCH per Table 5-1.

Exceptions to Ranking Point assignment are as follows:

- A. A SURROGATE receives zero (0) Ranking Points.
- B. A DISQUALIFIED team, as determined by the Head REFEREE, receives zero (0) Ranking Points in a Qualification MATCH or causes their ALLIANCE to receive zero (0) MATCH points in a Playoff MATCH.
- C. A "no-show" team is either DISQUALIFIED from or issued a RED CARD for that MATCH (see C6). A team is declared a no-show if no member of the DRIVE TEAM is in the ALLIANCE STATION at the start of the MATCH.

The total number of Ranking Points earned by a team throughout their Qualification MATCHES divided by the number of MATCHES they've been scheduled to play (minus any SURROGATE MATCH), then truncated to two (2) decimal places, is their Ranking Score (RS).

All teams participating in Qualification MATCHES are ranked by Ranking Score. If the number of teams in attendance is 'n', they are ranked '1' through 'n', with '1' being the highest ranked team and 'n' being the lowest ranked team.



Teams are ranked in order, using the sorting criteria defined in Table 12-2.

Table 12-2 Qualification MATCH ranking criteria

Order Sort	Criteria
1 st	Ranking Score
2 nd	Cumulative CARGO points
3 rd	Cumulative HATCH PANEL points
4 th	Cumulative HAB CLIMB points
5 th	Cumulative SANDSTORM BONUS points
6 th	Random sorting by the FMS

12.7 PLAYOFF MATCHES

In Playoff MATCHES, teams do not earn Ranking Points; they earn a Win, Loss or Tie. Within each series of the Playoff MATCH bracket, the first ALLIANCE to win two (2) MATCHES will advance.

In the case where the Quarterfinal or Semifinal MATCH scores for both ALLIANCES are equal, the Win is awarded to the ALLIANCE per criteria listed in Table 12-3. A DISQUALIFIED team, as determined by the Head REFEREE, causes their ALLIANCE to receive zero (0) MATCH points in a Playoff MATCH.

In Finals MATCHES, the Champion ALLIANCE is the first ALLIANCE to win two (2) MATCHES. In the case where an ALLIANCE hasn't won two (2) MATCHES after three (3) MATCHES, the Playoffs proceed with up to three (3) additional Finals MATCHES, called Overtime MATCHES, until an ALLIANCE has won two (2) Finals MATCHES. In the case where the Overtime MATCH scores for both ALLIANCES are equal, the win for that Overtime MATCH is awarded based on the criteria listed in Table 12-3.

Table 12-3 Playoff MATCH Tiebreaker Criteria

Order Sort	Criteria
1 st	Cumulative FOUL and TECH FOUL points due to opponent rule violations
2 nd	Cumulative CARGO points
3 rd	Cumulative HATCH PANEL points
4 th	Cumulative HAB CLIMB points
5 th	Cumulative SANDSTORM BONUS points
6 th	MATCH is replayed

12.7.1 ALLIANCE SELECTION PROCESS

At the end of the Qualification MATCHES, the top eight (8) seeded teams become the ALLIANCE Leads. The seeded ALLIANCES are designated, in order, ALLIANCE One, ALLIANCE Two, etc., down to ALLIANCE Eight. Using the ALLIANCE selection process described in this section, each ALLIANCE Lead chooses two (2) other teams to join their ALLIANCE.

If a team declines the ALLIANCE Lead position or doesn't send a student representative for ALLIANCE selection, they are ineligible to participate in the Playoff Tournament. If the declining/absent team would have been an ALLIANCE Lead, all lower ranked ALLIANCE Leads are promoted one spot. The next highest-ranked team moves up to become the ALLIANCE Eight Lead.

Each team chooses a student team representative who proceeds to the ARENA at the designated time (typically before the lunch break on the final day of the event) to represent their team. The designated student representative from each ALLIANCE in a Playoff MATCH is called the ALLIANCE CAPTAIN.

The ALLIANCE selection process consists of two (2) rounds during which each ALLIANCE CAPTAIN invites a team seeded below them in the standings to join their ALLIANCE. The invited team must not already have declined an invitation.



Round 1: In descending order (ALLIANCE One to ALLIANCE Eight), each ALLIANCE CAPTAIN invites a single team. The invited team's representative steps forward and either accepts or declines the invitation.

If the team accepts, it becomes a member of that ALLIANCE. If an invitation from a top eight ALLIANCE to another ALLIANCE Lead is accepted, all lower ALLIANCE Leads are promoted one spot. The next highest-seeded, unselected team moves up to become the ALLIANCE Eight Lead.

If the team declines, that team is not eligible to be picked again or to be a BACKUP TEAM (see the [Playoff MATCH Bracket](#) section), and the ALLIANCE CAPTAIN extends another invitation to a different team. If an invitation from a top eight ALLIANCE to another ALLIANCE Lead is declined, the declining team may still invite teams to join their ALLIANCE; however, it cannot accept invitations from other ALLIANCES.

The process continues until ALLIANCE Eight makes a successful invitation.

Round 2: The same method is used for each ALLIANCE CAPTAIN'S second choice except the selection order is reversed, with ALLIANCE Eight picking first and ALLIANCE One picking last. This process results in eight (8) ALLIANCES of three (3) teams each.

Of the remaining eligible teams, the highest seeded teams must either accept or decline to be included in a pool of available teams until there are up to eight (8) teams that accept to be added into the pool. FIELD STAFF will coordinate the assembly of this BACKUP pool immediately after the top ranked ALLIANCE has made their final pick. If a team is not available to accept inclusion in the BACKUP pool, it will be assumed they have declined the invitation.


12.7.2 PLAYOFF MATCH BRACKET

The Playoff MATCHES take place following the completion of the Qualification MATCHES and the ALLIANCE selection process. Playoff MATCHES are played in a bracket format as shown in Figure 12-3.

ALLIANCE Leads are assigned to PLAYER STATION 2, the first picks are assigned to their left in PLAYER STATION 1, and second picks are assigned to the ALLIANCE Lead's right in PLAYER STATION 3. If a BACKUP TEAM is in play, they will be assigned to the PLAYER STATION that was assigned to the DRIVE TEAM they're replacing. Teams cannot change assignments.

For Quarterfinal MATCHES, the higher seeded ALLIANCE is assigned to the Red ALLIANCE. Beyond the Quarterfinal MATCHES, the ALLIANCE on the top of each MATCH in Figure 12-3 are assigned to the Red ALLIANCE, regardless of whether they are the higher seeded ALLIANCE in that particular MATCH.



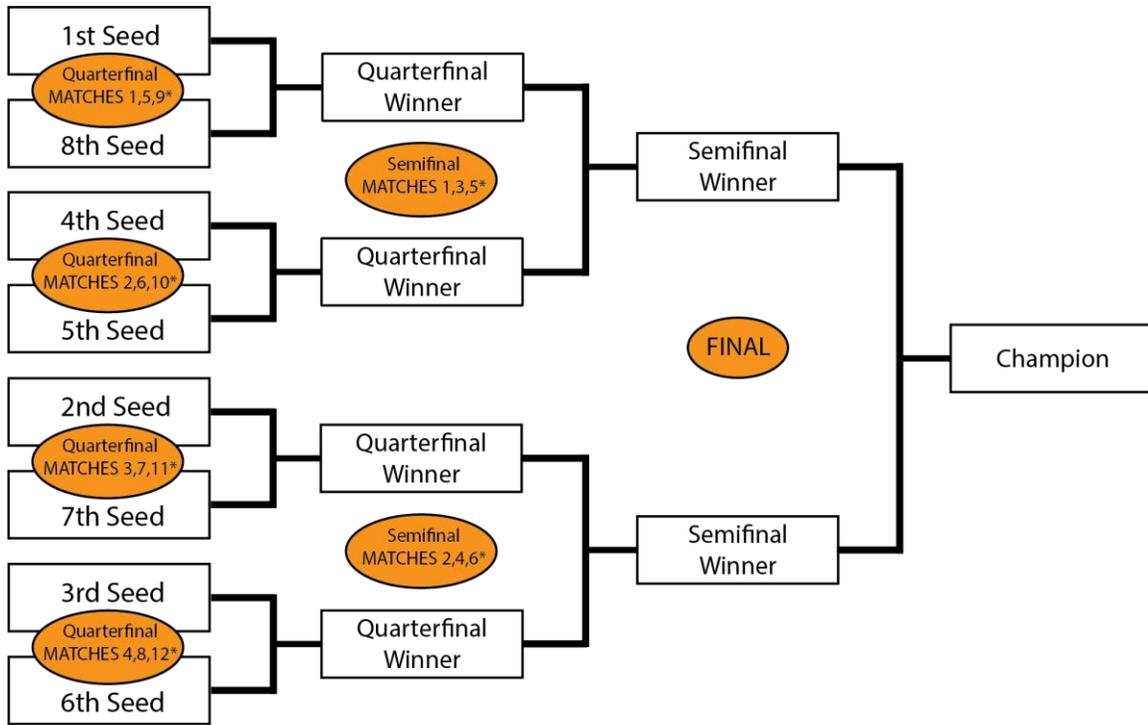

*If necessary

Figure 12-3 Playoff MATCH Bracket

In order to allow time between MATCHES for all ALLIANCES, the order of play is as follows:



Table 12-4 Playoff Order

Quarterfinal Round 1	Quarterfinal Round 2	Quarterfinal Round 3	Semifinals	Finals
Quarterfinal 1 (1 vs.8)	Quarterfinal 5 (1 vs.8)	Quarterfinal Tiebreaker 1 ¹	Semifinal 1	Final 1
Quarterfinal 2 (4 vs.5)	Quarterfinal 6 (4 vs.5)	Quarterfinal Tiebreaker 2 ¹	Semifinal 2	FIELD TIMEOUT
Quarterfinal 3 (2 vs.7)	Quarterfinal 7 (2 vs.7)	Quarterfinal Tiebreaker 3 ¹	Semifinal 3	Final 2
Quarterfinal 4 (3 vs.6)	Quarterfinal 8 (3 vs.6)	Quarterfinal Tiebreaker 4 ¹	Semifinal 4	FIELD TIMEOUT
	FIELD TIMEOUT ¹	FIELD TIMEOUT ¹	Semifinal Tiebreaker 1 ¹	Final Tiebreakers (Overtime) ¹
		Any Replays due to ties ¹	Semifinal Tiebreaker 2 ¹	Any Replays due to ties ¹
			FIELD TIMEOUT ¹	
			Any Replays due to ties ¹	

¹ - if required

12.7.3 PIT CREWS

During the Playoff MATCHES, extra team members may be needed to maintain the ROBOT between MATCHES because of the distance between the FIELD and the pit area. Each team is permitted to have three (3) additional pit crew members who can also help with needed ROBOT repairs/maintenance.

12.7.4 TIMEOUTS

A TIMEOUT is a period of up to six (6) minutes between MATCHES which is used to pause Playoff MATCH progression.

During a TIMEOUT, the ARENA Timer will display the time remaining in the TIMEOUT. Both ALLIANCES will enjoy the complete six (6) minute window. If an ALLIANCE completes their repairs before the ARENA Timer expires, the ALLIANCE CAPTAIN is encouraged to inform the Head REFEREE that they are ready to play. If both ALLIANCES are ready to play before the TIMEOUT expires, the next MATCH will start.

There are no TIMEOUTS in the Practice or Qualification MATCHES.

If circumstances require an ALLIANCE to play in back-to-back MATCHES during the Playoff MATCHES, the Head REFEREE will issue a FIELD TIMEOUT to allow teams to prepare for the next MATCH. FIELD TIMEOUTS are the same time duration as TIMEOUTS.



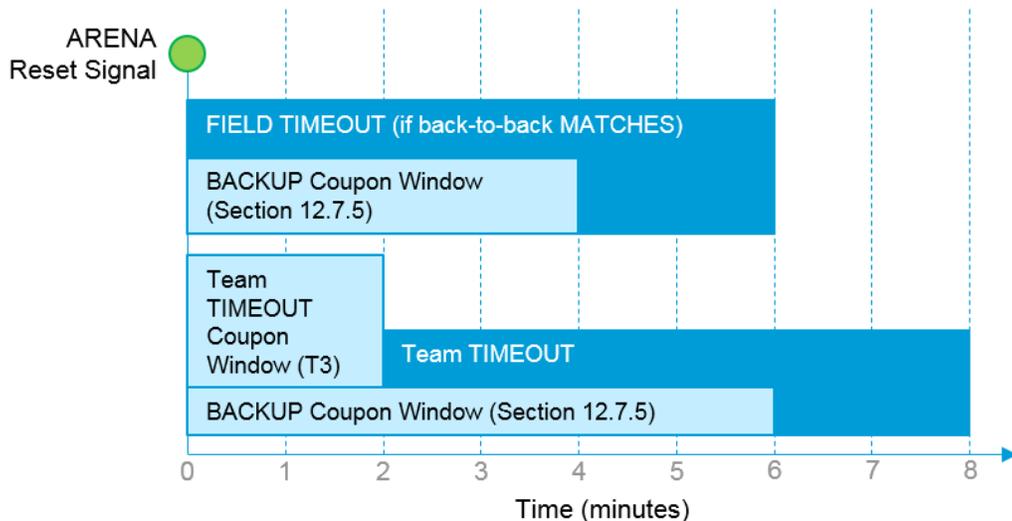


Figure 12-4 TIMEOUT Timeline

Each ALLIANCE in the Playoff tournament is issued (1) TIMEOUT.

Teams are expected to have their ROBOTS staged on the FIELD by the end of the TIMEOUT. Teams that cause a significant delay to the start of a MATCH after a TIMEOUT are subject to C7.

- T3.** If an ALLIANCE wishes to use their TIMEOUT, the ALLIANCE CAPTAIN must submit their TIMEOUT coupon to the Head REFEREE within two (2) minutes of the ARENA reset signal preceding their MATCH. If there is no preceding MATCH, the TIMEOUT coupon must be submitted no later than two (2) minutes before the scheduled MATCH time. The TIMEOUT will begin two (2) minutes after the ARENA reset signal (i.e. at the end of the TEAM TIMEOUT Coupon Window depicted in Figure 12-4)

Violation: A request presented outside parameters defined will be denied.

There are no cascading TIMEOUTS. If an ALLIANCE calls a TIMEOUT during a FIELD TIMEOUT, the FIELD TIMEOUT will expire two (2) minutes after the ARENA reset signal and the ALLIANCE'S TIMEOUT will begin.

If an ALLIANCE wishes to call a TIMEOUT during a FIELD TIMEOUT, it must still do so within two (2) minutes of the ARENA reset signal preceding their MATCH, per T3.

TIMEOUTS are not transferrable between ALLIANCES, meaning an ALLIANCE cannot hand their designated TIMEOUT coupon to another ALLIANCE to use, however an ALLIANCE may use their own coupon for any purpose they wish.

If a Playoff MATCH is replayed because of an ARENA FAULT which rendered a ROBOT inoperable, the Head REFEREE has the option of calling a FIELD TIMEOUT.

12.7.5 BACKUP TEAMS

In the Playoff MATCHES, it may be necessary for an ALLIANCE to replace one of its members due to a faulty ROBOT. ROBOT faults include but are not limited to:

1. mechanical damage,
2. electrical issues, or



3. software problems.

In this situation, the ALLIANCE CAPTAIN has the option to bring in only the highest seeded team from the pool of available teams to join its ALLIANCE. The team whose ROBOT and DRIVE TEAM replaces another ROBOT and DRIVE TEAM on an ALLIANCE during the Playoff MATCHES is called the BACKUP TEAM.

The resulting ALLIANCE is then composed of four (4) teams. The replaced team remains a member of the ALLIANCE for awards, but cannot return to play, even if their ROBOT is repaired.

Each ALLIANCE is allotted one (1) BACKUP TEAM Coupon during the Playoff MATCHES. If a second ROBOT from the ALLIANCE becomes inoperable, then the ALLIANCE must play the following MATCHES with only two (2) (or even one (1)) ROBOTS.

Example: Three (3) teams, A, B and C, form an ALLIANCE going into the Playoff MATCHES. The highest seeded team not on one of the eight (8) ALLIANCES is Team D. During one of the Playoff MATCHES, Team C's ROBOT suffers damage to its mechanical arm. The ALLIANCE CAPTAIN decides to bring in Team D to replace Team C. Team C and their ROBOT are not eligible to play in any subsequent Playoff MATCHES. The new ALLIANCE of Teams A, B, and D are successful in advancing to the Finals and win the event. Teams A, B, C, and D are all recognized as members of the Winning ALLIANCE and receive awards

In the case where a BACKUP TEAM is part of the Winning or Finalist ALLIANCE, there will be a four (4)-team Winning or Finalist ALLIANCE.

If during a TIMEOUT an ALLIANCE CAPTAIN determines that they need to call up a BACKUP TEAM, they must submit their BACKUP TEAM coupon to the Head REFEREE while there are still at least two (2) minutes remaining on the ARENA Timer. After that point, they will not be allowed to utilize the BACKUP TEAM.

Alternatively, an ALLIANCE CAPTAIN may choose to call up a BACKUP TEAM without using their TIMEOUT by informing the Head REFEREE directly within two (2) minutes of the Head REFEREE issuing the ARENA reset signal preceding their MATCH. If there is no preceding MATCH, the BACKUP TEAM coupon must be submitted no later than two (2) minutes before the scheduled MATCH time.

In the case where the ALLIANCE CAPTAIN'S ROBOT is replaced by a BACKUP TEAM, the ALLIANCE CAPTAIN is allowed as a sixteenth ALLIANCE member.

The Head REFEREE will not accept the BACKUP TEAM coupon unless it lists the number of the team whose ROBOT is being replaced and is initialed by the ALLIANCE CAPTAIN. Once a BACKUP TEAM coupon is submitted and accepted by the Head REFEREE, the BACKUP TEAM coupon may not be withdrawn by the ALLIANCE.

T4. An ALLIANCE may not request a TIMEOUT or a BACKUP TEAM after a Playoff MATCH is stopped by the Head REFEREE (e.g. due to an ARENA FAULT or a safety issue). The sole exception is if the replay is due to an ARENA FAULT that rendered a ROBOT inoperable.

Violation: A request presented outside parameters defined will be denied.

If a Playoff MATCH is replayed per T4, the Head REFEREE has the option of calling a FIELD TIMEOUT.



12.8 ADVANCEMENT THROUGH THE DISTRICT MODEL

Teams advance through the season depending on the events at which they compete: Regional or District. This section details how teams advance from Regional events to the *FIRST* Championship, or from District qualifying events, to their District Championship, to the *FIRST* Championship.

12.8.1 DISTRICT EVENTS

District teams are ranked throughout the season based on the points they earn at their first two (2) home District events they attend, as well as at their District Championship. Points are awarded to teams as follows:

Table 12-5 District Point Assignment

Category	Points
Qualification Round Performance	$QualificationPoints(R, N, \alpha) = \left\lceil InvERF\left(\frac{N - 2R + 2}{\alpha N}\right) \left(\frac{10}{InvERF\left(\frac{1}{\alpha}\right)}\right) + 12 \right\rceil$ <p>(For a typically sized District event, this will result in a minimum of four (4) points being awarded for Qualification round performance. For events of all sizes, a maximum of twenty-two (22) points will be awarded.)</p>
ALLIANCE CAPTAINS	Equal to 17 minus the ALLIANCE CAPTAIN number (e.g. 14 points for ALLIANCE #3 Captain)
Draft Order Acceptance	Equal to 17 minus the Draft Order Acceptance Number (e.g. 12 points for the team that is 5 th to accept an invitation)
Playoff Advancement	Points awarded based on team participation in individual playoff rounds, and whether or not the ALLIANCE advances. See details below.
Judged Team Awards	10 points for Chairman's Award 8 points each for Engineering Inspiration and Rookie All Star Awards 5 points each for all other judged team awards
Team Age	10 points for Rookie teams 5 points for second-year teams

Points earned at District Championships are multiplied by three (3) and then added to points earned at District events, to determine the final season point total for the team.

If there is a tie in the season point total between teams, those items are broken using the following sorting criteria:



Table 12-6 District team sort criteria

Order Sort	Criteria
1 st	Total Playoff Round Performance Points
2 nd	Best Playoff Round Finish at a single event
3 rd	Total ALLIANCE Selection Results Points
4 th	Highest Qualification Round Seed or Draft Order Acceptance (i.e. Highest ALLIANCE Selection points at a single event)
5 th	Total Qualification Round Performance Points
6 th	Highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
7 th	Second Highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
8 th	Third Highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
9 th	Random Selection

12.8.1.1 Qualification Round Performance

The calculation of Qualification performance points is done using the equation (an inverse error function) in the table above. The equation utilizes the following variables:

- R – the qualification rank of the team at the event at the conclusion of Qualification MATCHES (as reported by FMS)
- N – the number of *FIRST* Robotics Competition teams participating in the Qualification rounds at the event
- Alpha (α) – a static value (1.07) used to standardize the distribution of points at events

This formula generates an approximately normal distribution of Qualification Round Performance points at an event, based on rank, with most teams getting a moderate number of points, and fewer teams getting the highest or lowest numbers of points available.

Table 12-7 displays sample Qualification Round Performance points for variously ranked teams at a forty (40) team event. The system will automatically generate the appropriate points for each team based on their rank and the number of teams at the event.

Table 12-7 Sample Qualification Round point assignments

Rank	1	2	3	4	...	19	20	21	...	37	38	39	40
Points	22	21	20	19	...	13	13	12	...	6	6	5	4

12.8.1.2 ALLIANCE Selection Results

This attribute measures both individual team qualification round seeding performance and recognition by peers.

ALLIANCE CAPTAINS are recognized based on their qualification round seeding rank. This rank is a result of the rules of the game, which typically incorporate several team performance attributes, and are designed to eliminate ties in rank. Non-ALLIANCE CAPTAINS are rewarded based on peer recognition. To be invited to join an ALLIANCE, a team's peers have decided that the team has attributes that are desirable. Giving points for ALLIANCE selection also supports come-from-behind teams. A team taking several MATCHES to optimize their performance may be recognized as a late bloomer by a top seeded team, even if that performance isn't reflected in the rankings because of poor performance in early MATCHES. These points also have the potential to recognize teams employing a minority strategy with



their ROBOT. Teams with unique or divergent ROBOT capabilities that complement the strengths of other ALLIANCE members may be selected to fill a strategic niche.

Note also that ALLIANCE CAPTAINS are given the same number of points as the team drafted in the same sequence. For example, the third ALLIANCE CAPTAIN gets the same number of points as the third draft. Numerical analysis supports the idea that ALLIANCE CAPTAINS are about as strong in ROBOT performance as equivalently drafted teams. As an additional minor benefit, awarding the same points for ALLIANCE CAPTAINS and equivalent drafts lubricates the acceptance of draft offers between ALLIANCE CAPTAINS, which gives teams out of the top eight the chance to experience being ALLIANCE CAPTAINS themselves.

12.8.1.3 Playoff Round Performance

This attribute measures team performance as part of an ALLIANCE.

All teams on the ALLIANCE winning a particular playoff series, who participate in MATCHES with their ROBOTS, receive five (5) points per MATCH won. In most cases, teams receive ten (10) points at each of the Quarterfinal, Semifinal, and Final levels, unless a BACKUP ROBOT is called in to play.

12.8.1.4 Awards

This attribute measures team performance with respect to team awards judged at the event.

The points earned for team awards in this system are not intended to capture the full value of the award to the team winning the award, or to represent the full value of the award to *FIRST*. In many ways, the team's experience in being selected for awards, especially the Chairman's Award, the Engineering Inspiration Award, and the Rookie All Star Award, is beyond measure, and could not be fully captured in its entirety by any points-based system. Points are being assigned to awards in this system only to help teams recognize that *FIRST* continues to be "More than RobotsSM," with the emphasis on our cultural awards, and to assist in elevating award-winning teams above non-award-winning teams in the ranking system.

Teams only get points for team awards judged at the event. If an award is not judged, e.g. Rookie Highest Seed, is not for a team, e.g. the Dean's List Award, or is not judged at the event, e.g. Safety Animation Award, sponsored by UL, no points are earned.

12.8.1.5 Team Age

This attribute recognizes the difficulty in being a rookie or second-year team.

Points are awarded to rookie and second year teams in recognition of the unique challenges teams face in those early years, and to increase the chance that they will make it to the District Championship to compete with their ROBOTS. Like our dedicated Rookie awards, these additional points are intended to recognize and motivate newer participants in *FIRST* Robotics Competition. These points are awarded once at the beginning of the season. Rookie year is calculated based on the year in which *FIRST* recognizes the team as a rookie.

12.8.1.6 Regional Participation

District teams do not earn points for their actions at any Regionals they may attend, nor are eligible for *FIRST* Championship qualifying judged awards at those events. However, if a District team does earn a slot at the *FIRST* Championship while attending a Regional event, that slot does count as part of the total Championship allocation the District is receiving for the season.



12.8.2 DISTRICT CHAMPIONSHIP ELIGIBILITY

A team competing in a District qualifies for their District Championship by meeting one of the following criteria:

- A. District Chairman’s Award Winner
- B. District Ranking; based on total points earned at their first two home District events as detailed in the [District Events](#) section.

Teams do not earn points at third or subsequent District events, nor at any inter-district or Regional events at which they compete during the season.

If a team declines an invitation to the District Championship, the next highest uninvited team on the list is invited, and so on, until the event capacity is filled.

- C. District Engineering Inspiration winner (qualifies to compete for the award only)
- D. District Rookie All Star winner (qualifies to compete for the award only)

The capacity of each District Championship is shown in Table 12-8. Each District determines the number of teams that qualify for their District Championship. These limits are based on factors including but not limited to the total number of teams in the District, available venue capacity, etc.

Table 12-8 2019 District Championship Capacities

District Championship	Capacity
FIRST Chesapeake District Championship	58
FIRST Israel District Championship	45
FIRST Mid-Atlantic District Championship	60
FIRST North Carolina State Championship	32
FIRST Ontario Provincial Championship	80
FIRST in Texas District Championship	64
Indiana State Championship	32
Michigan State Championship	160
New England District Championship	64
Pacific Northwest District Championship	64
Peachtree District State Championship	45

12.8.3 DISTRICT CHAMPIONSHIPS WITH MULTIPLE DIVISIONS

Some District Championships have a sufficient number of teams to justify using more than one division. Teams are assigned divisions by *FIRST* using a process developed by *FIRST* in Michigan.

The process employs a “brute force iterative randomizer” and is executed as follows:

1. The district team list is sorted in order of cumulative district points earned as described in the District Events section.
2. The list is divided into quartiles based on rank (e.g. the 1st quartile has the top 25% ranked teams)
3. Division assignments are randomly generated using equal contribution from each quartile
4. Three (3) criteria are calculated for each division:
 - a. Average strength: The arithmetic mean of the district point values of teams in a division
 - b. Distribution of strength: The Signal to Noise Ratio (SNR) of the district point values of teams in a division. SNR is calculated as follows:



$$SNR = 10(\log \frac{\bar{x}^2}{\sigma^2})$$

\bar{x} = arithmetic mean of the district points in a division

σ = standard deviation of the district points in a division

- c. Distribution of strength for “top” teams: The SNR of the district point values of teams in the 1st quartile of a division.
- 5. The three (3) criteria for each division are compared to the other division(s). If the difference between the division’s value and any other division’s value exceeds the limits in Table 12-9, the criteria is not met.


Table 12-9 District Championship Division Evaluation Limits

	Two (2) Divisions	Four (4) Divisions
Average strength	1	2
Distribution of strength	1	2.5
Distribution of strength for “top” teams	1.5	2

- 6. If all three (3) criteria met, event organizers publish the assignments. If any of the three (3) criteria are not met, assignments are rejected, and the process returns to Step 3.

In these cases:

- Division winning ALLIANCES play each other in District Championship Playoffs, employing the bracket below that corresponds to their District, until a winning ALLIANCE for the event is determined.

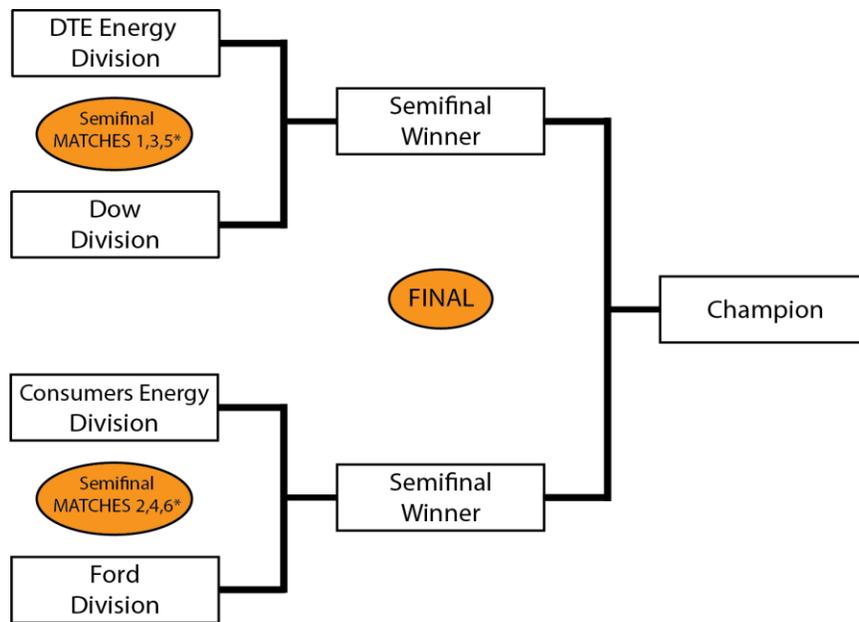

*If necessary

Figure 12-5 FIRST in Michigan District Championship Playoff Bracket



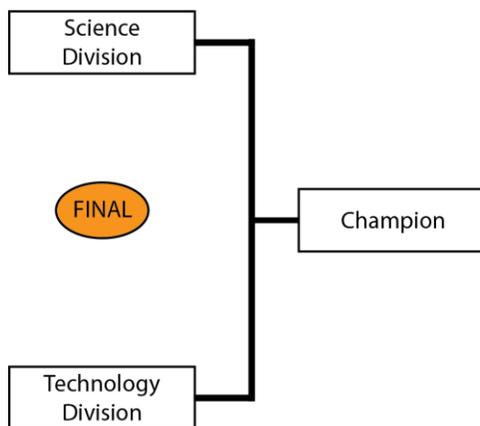


Figure 12-6 Ontario District Championship Playoff Bracket

- Teams participating in District Championship Playoffs earn Playoff round performance District points as described in the [Playoff Round Performance](#) section.
- If an ALLIANCE in a District Championship Playoff has not yet adopted a BACKUP ROBOT per the [BACKUP TEAMS](#) section, the ALLIANCE CAPTAIN may bring in only the highest seeded team from their Division's pool of available teams to join its ALLIANCE.

12.9 ADVANCEMENT TO THE FIRST CHAMPIONSHIP

FIRST invites teams listed below the *FIRST* Championship:

A. Prequalified teams

- members of the *FIRST* Hall of Fame
- original and sustaining teams since 1992
- 2018 *FIRST* Championship winners
- 2018 *FIRST* Championship Engineering Inspiration Award winners
- 2018 *FIRST* Championship Chairman's Award Finalists

B. 2019 Regional Qualifying teams

- Qualifying Award Winners (excluding District teams participating at the Regional)
 - Regional Chairman's Award
 - Engineering Inspiration Award
 - Rookie All-Star Award
- Regional Winners
- Wild Card recipients

C. 2019 District Championship Qualifying teams

- Qualifying Award Winners
 - Chairman's Award
 - Engineering Inspiration Award
 - Rookie All Star winners
- District Championship Winners
- Teams on the final District ranking list, as deep in the ranking list as the District needs to go to fill their allocation.

12.9.1 WILD CARDS

Wild cards are used to qualify additional teams for the *FIRST* Championship from Regional events.



All Regional events have a minimum of one (1) Wild Card slot. Additional Wild Cards are generated as follows:

- A. any team that has already qualified for the *FIRST* Championship (per the [Advancement to *FIRST* Championship](#) section, parts A and B) that earns an additional spot (per the [Advancement to the *FIRST* Championship](#) section, part B) generates one (1) Wild Card.
- B. any team earning two (2) qualifying spots at a single Regional (per the [Advancement to *FIRST* Championship](#) section, part B, e.g. by being on the Winning ALLIANCE and earning the Chairman's Award) generates one (1) Wild Card.
- C. any team that has already qualified for the *FIRST* Championship (per the [Advancement to *FIRST* Championship](#) section, parts A and B), and earns two (2) qualifying spots (per the [Advancement to *FIRST* Championship](#) section, part B) will generate two (2) Wild Card slots.

Wild Card slots are distributed to the Finalist ALLIANCE, in the order of team selection per the [ALLIANCE Selection Process](#) section, until either all Wild Card slots generated at that event are distributed or the Finalist ALLIANCE is out of teams, whichever comes first.

If a member of the Finalist ALLIANCE has already qualified for the *FIRST* Championship they are skipped and the next member of the ALLIANCE is awarded the available Wild Card.

Unused Wild Card slots are neither backfilled nor replaced.

A team may decline a Wild Card, but this does not pass the Wild Card slot down to the next available team. The Wild Card goes unused.

Teams selected from the *FIRST* Championship Waitlist to participate at the *FIRST* Championship do not generate Wild Cards.

12.9.2 FIRST CHAMPIONSHIP ELIGIBILITY FOR DISTRICT TEAMS

Districts receive the percentage of 'available slots' at their assigned *FIRST* Championship location, rounded up to the nearest whole slot, equal to the percentage of teams they have in their District compared to the total of all *FIRST* Robotics Competition teams in the current season who would normally be assigned to their *FIRST* Championship location. 'Available slots' are calculated by taking the total number of slots at each *FIRST* Championship location, subtracting the number of pre-qualified teams assigned to that location, and also subtracting a 10% allowance for waitlisted teams, as Districts are still allowed to send waitlisted teams to the *FIRST* Championship. Further, this overall calculation uses a 'snapshot' of teams that have registered and paid as of a specific day a week or so after season payment due.

If a District team earns a slot to the *FIRST* Championship within the season, but is not able to attend, the top ranked team who has not yet been offered a slot is given the opportunity, and so on, until all slots are filled. Slots for pre-qualified teams will not be backfilled.

Table 12-10 outlines the District Championship allocations for 2019. Districts determine the number of Dean's List, Chairman's, Rookie All Star, and Engineering Inspiration Awards to present at their Championship, within a range established by *FIRST*. The team counts are based on the team representation of the respective District at the respective Championship. For the awards, ranges are developed by using ratios agreed upon by *FIRST* and District Leadership. These ranges allow each District to represent their own community as they see fit.



For the Chairman's Award, the ratios range from one (1) Chairman's Award team for every eighteen (18) Championship District teams to one (1) Chairman's Award team for every nine (9) Championship District teams.

For the Dean's List Award, the ratios range from one (1) Dean's List Finalist for every nine (9) Championship District teams to one (1) Dean's List Finalist for every six (6) Championship District teams.

Table 12-10 District slot allocation for FIRST Championship

	FIRST Championship Slots	FIRST Championship Normalized Slots	Chairman's Award			Dean's List Award			Engineering Inspiration Award			Rookie All Star Award		
			Max Ratio	Min Ratio	District Selection	Max Ratio	Min Ratio	District Selection	Min	Max	District Selection	Min	Max	District Selection
			18	9		9	9							
FIRST Championship: Detroit														
FIRST Chesapeake	21		1	2	2	2	4	4	1	2	2	1	2	1
FIRST in Michigan	87		5	10	5	10	15	15	1	2	1	1	2	2
FIRST Israel	11		1	1	1	1	2	2	1	2	1	1	2	1
FIRST Mid-Atlantic	21		1	2	2	2	4	4	1	2	2	1	2	1
Indiana FIRST	10		1	1	1	2	2	2	1	2	1	1	2	1
NE FIRST	33		2	4	4	4	6	6	1	2	2	1	2	1
Ontario	29		2	3	3	3	5	5	1	2	1	1	2	1
FIRST Championship: Houston														
FIRST in Texas	38	31	2	3	3	3	5	5	1	2	2	1	2	2
FIRST North Carolina	15	12	1	1	1	2	2	2	1	2	2	1	2	1
Pacific Northwest	31	25	1	3	3	3	4	4	1	2	2	1	2	1
Peachtree	17	14	1	2	2	2	2	2	1	2	2	1	2	2

All Districts, regardless of Championship Slot allocation, may award one (1) or two (2) Engineering Inspiration and Rookie All-Star Awards.

Chairman's Award and Dean's List Award maximums and minimums are determined by ratios applied to a given District's Championship Slot allocations. However, Districts assigned to Houston have relatively larger Championship slot allocations for a given team count compared to Districts assigned to Detroit, and we did not want these larger allocations to skew award allocations. So, for the purposes of award allocations only, Championship slots for Houston Districts were 'normalized', as shown in the table, reducing the slots allocated to what they would have been if both Championship geographies had the same total number of FIRST Robotics Competition teams. This 'normalized' slot allocation was then used to determine award minimums and maximums. As noted, these normalized slot values are used only for





award allocations. The Houston-assigned Districts still retain the full Championship Slots Allocated (the larger number) shown in the table.

12.10 FIRST CHAMPIONSHIP: ADDITIONS AND EXCEPTIONS

At the 2019 *FIRST* Championship events, teams are split into six (6) Subdivisions. The process used to assign teams to their Subdivision is as follows:

1. Rookies are assigned randomly, team by team, sequentially to Divisions (i.e. a team in Division 1, a team in Division 2, a team in Division 3, a team in Division 4, a team in Division 5, a team in Division 6, then back to Division 1 again, until Rookies are all assigned to a Division.
2. Step 1 is repeated with Veteran teams.

Each Subdivision plays a standard Tournament as described in the [Qualification MATCHES](#) and [Playoff MATCHES](#) sections to produce the Subdivision Champions. Those six (6) Subdivision Champions proceed to the Championship Playoffs, on the Einstein fields, to determine the 2019 *FIRST* Robotics Competition Championship Winners, per the [FIRST Championship Playoffs](#) section.

12.10.1 FOUR ROBOT ALLIANCES

There is no provision for BACKUP TEAMS at the Championship.

Instead, before each Subdivision Playoff Tournament, ALLIANCES will be selected per the process as described in the [ALLIANCE Selection Process](#) section, however the process will continue with a 3rd round of selection as follows.

Round 3: The same method is used for each ALLIANCE CAPTAIN'S third choice except the selection order is reversed again, with ALLIANCE One picking first and ALLIANCE Eight picking last. This process results in eight (8) ALLIANCES of four (4) teams each.

ALLIANCES may start with any three (3) of the four (4) ROBOTS on their ALLIANCE during Subdivision Playoff MATCHES and during the Championship Playoffs. The list of three (3) teams participating in the MATCH and their selected PLAYER STATIONS is called the LINEUP. One representative from the team not on the LINEUP is allowed as a sixteenth ALLIANCE member. This additional representative may only serve in an advisory role and will be considered a COACH (e.g. can't be a HUMAN PLAYER).

The LINEUP is kept confidential until the FIELD is set for the MATCH, at which point each ALLIANCE'S LINEUP will appear on the Team Signs.

If an ALLIANCE does not submit a LINEUP for their first of the Subdivision Playoffs or the Championship Playoffs within two (2) minutes before the scheduled MATCH time, the LINEUP will be the ALLIANCE Lead, 1st ALLIANCE selection, and 2nd ALLIANCE selection. If any of these three (3) ROBOTS are unable to play, the ALLIANCE must play the MATCH with only two (2) (or even one (1)) ROBOT(S).

If an ALLIANCE would like to change their LINEUP after their 1st Subdivision Playoff or Championship Playoff MATCH, the ALLIANCE CAPTAIN must report the LINEUP to the Head REFEREE, or their designee, in writing prior to end of the preceding MATCH (e.g. the LINEUPS for Quarterfinal 2 must be submitted before the end of Quarterfinal 1).

Once the LINEUP has been declared, it cannot be changed unless there is a TIMEOUT. If there is a TIMEOUT, the ALLIANCE CAPTAIN may submit a different LINEUP, but must do so while there are still more than two (2) minutes remaining in the TIMEOUT.

Example: Four (4) teams, A, B, C and D, form an ALLIANCE going into the Playoff MATCHES on their Subdivision FIELD. During one of the Playoff MATCHES, Team C's ROBOT becomes inoperable. The ALLIANCE decides to bring in Team D to replace Team C. Team C repairs their ROBOT and may play in any subsequent Playoff MATCHES replacing Teams A, B, or D. All four (4) ALLIANCE members are also eligible



to play MATCHES during the Championship Playoffs should the ALLIANCE win the Subdivision Tournament.

If a MATCH must be replayed due to an ARENA FAULT, the LINEUP for the replayed MATCH is the same as the original MATCH. The sole exception is if the ARENA FAULT rendered a ROBOT inoperable, in which case the LINEUP can be changed.

12.10.2 FIRST CHAMPIONSHIP PIT CREWS

FIRST will distribute buttons to the ALLIANCE CAPTAINS during the ALLIANCE CAPTAIN meeting, which takes place on the Subdivision FIELDS. These buttons will provide the necessary access to the ARENA for pit crew members.

- T5.** Only team members wearing proper buttons are allowed on the ARENA floor during Subdivision and Championship Playoff MATCHES.

Violation: MATCH will not start until the situation is corrected. Those not displaying identification must leave the ARENA.

Teams should assume they may be chosen for an ALLIANCE and think about the logistics of button distribution and set a plan prior to the ALLIANCE selection process. It is each ALLIANCE CAPTAIN'S responsibility to get the team's buttons to the pit crew members.

12.10.3 FIRST CHAMPIONSHIP PLAYOFFS

The six (6) Subdivision Champions play a round-robin style tournament to determine the 2019 FIRST Robotics Competition Champions. In this format, each Subdivision Champion plays one MATCH against each of the other Subdivision Champions. The order of MATCHES is shown in Table 12-11.

Table 12-11 Championship MATCH order

Round	MATCH	Houston				Detroit			
		Mass		Energy		Mass		Energy	
		Red	Blue	Red	Blue	Red	Blue	Red	Blue
1	1	Carver	Turing			Archimedes	Tesla		
	2			Galileo	Roebing			Carson	Darwin
	3	Hopper	Newton			Curie	Daly		
2	4			Carver	Roebing			Archimedes	Darwin
	5	Turing	Newton			Tesla	Daly		
	6			Galileo	Hopper			Carson	Curie
3	7	Carver	Newton			Archimedes	Daly		
	8			Roebing	Hopper			Darwin	Curie
	9	Turing	Galileo			Tesla	Carson		
4	10			Hopper	Carver			Curie	Archimedes
	11	Newton	Galileo			Daly	Carson		
	12			Roebing	Turing			Darwin	Tesla
5	13	Galileo	Carver			Carson	Archimedes		
	14			Hopper	Turing			Curie	Tesla
	15	Newton	Roebing			Daly	Darwin		



In the Championship Playoffs, ALLIANCES do not earn Ranking Points; they earn Championship Points. Championship Points are units credited to an ALLIANCE based on their performance in each MATCH and are awarded at the completion of each Round Robin tournament MATCH.

- A. The winning ALLIANCE receives two (2) Championship Points
- B. The losing ALLIANCE receives zero (0) Championship Points
- C. In the event of a tied score, each ALLIANCE receives one (1) Championship Point

Exceptions to A-C are as follows:

- D. A DISQUALIFIED team, as determined by the Head REFEREE, causes their ALLIANCE to receive zero (0) Championship points.

The total number of Championship Points earned by a team throughout the round robin MATCHES divided by the number of round robin MATCHES in which they've been scheduled is their Championship Score (CS).

All teams participating in round robin MATCHES are ranked by Championship Score. If the number of teams in attendance is 'n', they are ranked '1' through 'n', with '1' being the highest ranked team and 'n' being the lowest ranked team.

Table 12-12 Einstein Tournament Ranking Criteria

Order Sort	Criteria
1st	Championship Score
2nd	Cumulative CARGO points
3rd	Cumulative HATCH PANEL points
4th	Cumulative HAB Climb Bonus points
5th	Cumulative SANDSTORM Bonus points
6th	If tie affects which ALLIANCES advance to Playoffs, a tiebreaker MATCH is played between the affected ALLIANCES. If tie is between ALLIANCES advancing to Playoffs, FMS randomly seeds tied ALLIANCES to determine ALLIANCE color.

The two (2) ALLIANCES with the highest Championship Scores at the conclusion of the round robin tournament advance to the Einstein Finals. In the Einstein Finals, ALLIANCES do not earn points, they earn a Win, Loss or Tie. The first ALLIANCE to win two (2) MATCHES is declared the 2019 *FIRST* Robotics Competition Champions.

During the Einstein Finals, if the MATCH score of each ALLIANCE is equal, the MATCH is replayed. In this circumstance, the LINEUP may be changed

12.10.4 FIRST CHAMPIONSHIP TIMEOUTS

There are no TIMEOUTS for teams in the Einstein tournament.



13 GLOSSARY

Term	Definition
ACTIVE DEVICE	any device capable of dynamically controlling and/or converting a source of electrical energy by the application of external electrical stimulus
ALIGNMENT LINE	one of thirty-two (32) white gaffers tape marks adhered to the carpet that start 1 ft. 6 in. (~46 cm) from the outermost face of the assembly and extend to the point where the carpet meets the assembly and centered at GAME PIECE placement/retrieval points
ALLIANCE	a cooperative of up to four (4) FIRST® Robotics Competition teams
ALLIANCE CAPTAIN	The designated student representative from each ALLIANCE in a Playoff MATCH
ALLIANCE STATION	a 30-ft. (~914 cm) wide by 10-ft. (~305 cm) deep infinitely tall volume formed by, and including the ALLIANCE WALL, the edge of the carpet, and ALLIANCE colored tape
ALLIANCE WALL	a 6-ft. 6-in. (~198 cm) tall structure that separates ROBOTS from DRIVE TEAMS (except the TECHNICIAN) and consists of three (3) PLAYER STATIONS, and two (2) LOADING STATIONS. ALLIANCE WALLS define the short edges of the FIELD and, along with the guardrails, prevent ROBOTS from inadvertently exiting the FIELD during the MATCH
ARENA	all elements of the game infrastructure that are required to play DESTINATION: DEEP SPACE Presented By The Boeing Company: the FIELD, GAME PIECES, and all equipment needed for FIELD control, ROBOT control, and scorekeeping
ARENA FAULT	an error in ARENA operation
BACKUP TEAM	The team whose ROBOT and DRIVE TEAM replaces another ROBOT and DRIVE TEAM on an ALLIANCE during the Playoff MATCHES
BAY	a container used to hold one (1) CARGO and can be sealed with one (1) HATCH PANEL
BOM	Bill of Material
BUMPER	a required assembly which attaches to the ROBOT frame
BUMPER ZONE	the volume contained between the floor and a virtual horizontal plane 7½ in. (~19 cm) above the floor in reference to the ROBOT standing normally on a flat floor
BYPASSED	the state assigned to any ROBOT which is unable or ineligible to participate in that MATCH as determined by the FTA, LRI, or Head REFEREE
CARGO	one (1) of two (2) types of GAME PIECES, an orange 13-in. (~33 cm) ±½ in. (~1.2 cm) diameter rubber playground ball with a FIRST logo as shown in Figure 4-30. The ball is made by Sportime (PN 1623139E)
CARGO SHIP	a 7-ft. 11¼-in. (~243 cm) long, 4-ft. 7¼ in. (~142 cm) wide, and 4 ft. (~122 cm) tall (excluding its fin) assembly with eight (8) BAYS, three (3) on each side and two (2) on the front (the front faces its ALLIANCE WALL).



Term	Definition
CARGO SHIP LINE	one of two (2) tape lines that extend the width of the FIELD and are colinear with the stern of each CARGO SHIP
CENTER LINE	an unmarked reference line that bisects the length of the FIELD
COACH	a precollege student or adult mentor member of the DRIVE TEAM who acts as a guide or advisor
COMPONENT	any part in its most basic configuration, which cannot be disassembled without damaging or destroying the part or altering its fundamental function
COTS	Commercial off the Shelf, a standard (i.e. not custom order) part commonly available from a VENDOR for all teams for purchase
CUSTOM CIRCUIT	any electrical COMPONENT of the ROBOT other than motors, pneumatic solenoids, roboRIO, PDP, PCM, VRM, RSL, 120A breaker, motor controllers, relay modules (per R36-B), wireless bridge, electrical solenoid actuators, or batteries
DEPOT	an area used to stage CARGO at the start of the MATCH per the Setup section
DISABLED	the state in which a ROBOT is commanded to deactivate all outputs, rendering the ROBOT inoperable for the remainder of the MATCH
DISQUALIFIED	the state of a team in which they receive zero (0) MATCH points and zero (0) Ranking Points in a Qualification MATCH or causes their ALLIANCE to receive zero (0) MATCH points in a Playoff MATCH
DRIVER	a precollege student member of the DRIVE TEAM who is an operator and controller of the ROBOT
DRIVE TEAM	a set of up to five (5) people from the same <i>FIRST</i> Robotics Competition team responsible for team performance for a specific MATCH
FABRICATED ITEM	any COMPONENT or MECHANISM that has been altered, built, cast, constructed, concocted, created, cut, heat treated, machined, manufactured, modified, painted, produced, surface coated, or conjured partially or completely into the final form in which it will be used on the ROBOT
FIELD	a 27 ft. (~823 cm) by 54 ft. (~1646 cm) carpeted area bound by and including the inward- and upward-facing surfaces of the guardrails, inward-facing surfaces of the ALLIANCE WALLS (except Chute surfaces). It is populated with ROCKETS, CARGO SHIPS, HAB PLATFORMS, DEPOTS, and LOADING STATIONS
FIELD STAFF	REFEREES, FTAS, or other staff working around the FIELD
FMS	the electronics core responsible for controlling the <i>FIRST</i> Robotics Competition playing FIELD. The FMS encompasses all FIELD electronics, including the computers, REFEREE touchscreens, wireless access point, sensors, stack lights, E-Stops, etc.
FOUL	a credit of three (3) points towards the opponent's total score
FRAME PERIMETER	fixed, non-articulated structural elements of the ROBOT contained within the BUMPER ZONE



Term	Definition
FTA	a <i>FIRST</i> Technical Advisor
GAME PIECES	CARGO and HATCH PANELS
HAB PLATFORM	a 12 ft. 6½ in. (~382 cm) by 7 ft. 11½ in. (~243 cm) assembly that consists of Level 1, 2, and 3 platforms, their supporting structures, and the ramp
HAB LINE	one (1) of two (2) tape lines that extend the width of the FIELD and are colinear with and overlap the bottom of the HAB ramp by 1 in. The tape color matches the color of the closest ALLIANCE STATION.
HAB ZONE	an infinitely tall volume defined by the guardrail, ALLIANCE WALL, and the HAB LINE. The HAB ZONE includes the HAB LINE.
HATCH	an opening on a ROCKET or CARGO SHIP on which HATCH PANELS must be placed to retain CARGO. There are two types of HATCHES: a ROCKET HATCH and a CARGO SHIP HATCH.
HATCH PANEL	one (1) of two (2) types of GAME PIECES, a circular 3/16-in. (~5 mm) thick polycarbonate toroid
HUMAN PLAYER	a pre-college student DRIVE TEAM member who acts as a GAME PIECE manager
KOP	Kit of Parts, the collection of items listed on the current season's Kickoff Kit Checklists, distributed to the team via <i>FIRST</i> Choice in the current season, or paid for completely (except shipping) with a Product Donation Voucher (PDV) from the current season
LINEUP	The list of three (3) teams participating in the MATCH and their selected PLAYER STATIONS
LOADING STATION	a FIELD assembly that allows HUMAN PLAYERS to feed GAME PIECES to ROBOTS on the FIELD
LRI	a Lead ROBOT Inspector
MATCH	a two (2) minute and thirty (30) second period of time in which ALLIANCES play DESTINATION: DEEP SPACE
MECHANISM	a COTS or custom assembly of COMPONENTS that provide specific functionality on the ROBOT
MIDLINE	a reference line that bisects the width of the FIELD and is marked by black tape that covers the mating seam of the two strips of carpet
MXP	myRIO Expansion port, the expansion port on the roboRIO
OPERATOR CONSOLE	the set of COMPONENTS and MECHANISMS used by the DRIVERS and/or HUMAN PLAYER to relay commands to the ROBOT
PASSIVE CONDUCTORS	any device or circuit whose capability is limited to the conduction and/or static regulation of the electrical energy applied to it (e.g. wire, splices, connectors, printed wiring board, etc.)
PCM	a Pneumatic Control Module



Term	Definition
PDP	a Power Distribution Panel
PLAYER STATION	one (1) of three (3) assigned positions in an ALLIANCE WALL from where a DRIVE TEAM operates their ROBOT
PORT	one of three (3) 1 ft. 4 in. (~41 cm) diameter holes in the “front” face of each ROCKET
RED CARD	a penalty assessed for egregious ROBOT or team member behavior or rule violations which results in a team being DISQUALIFIED for the MATCH
REFEREE	an official who is certified by <i>FIRST</i> to enforce the rules of DESTINATION: DEEP SPACE
ROBOT	an electromechanical assembly built by the <i>FIRST</i> Robotics Competition team to perform specific tasks when competing in DESTINATION: DEEP SPACE Presented By The Boeing Company. The ROBOT must include all of the basic systems required to be an active participant in the game – power, communications, control, BUMPERS, and movement. The ROBOT implementation must obviously follow a design approach intended to play DESTINATION: DEEP SPACE (e.g. a box of unassembled parts placed on the FIELD, or a ROBOT designed to play a different game, does not satisfy this definition)
ROCKET	a 10 ft. 4 in. (~315 cm) tall assembly placed such that its centerline is 8 ft. (~244 cm) from the CENTER LINE, and its “front” face is parallel to the guardrail, faces its CARGO SHIP, and 2 ft. 3½ in. (~70 cm) from the guardrail.
RP	a Ranking Point
RS	the Ranking Score
RSL	a ROBOT Signal Light
SANDSTORM	an assembly that features three (3) shutters, each directly above a PLAYER STATION
SANDSTORM PERIOD	a fifteen (15) second period at the start of each MATCH (T-minus 150s to T-minus 135s), during which the PLAYER STATION is blocked by the SANDSTORM
SIGNAL LEVEL	circuits which draw $\leq 1A$ continuous and have a source incapable of delivering $>1A$, including but not limited to roboRIO non-PWM outputs, CAN signals, PCM Solenoid outputs, VRM 500mA outputs and Arduino outputs
STARTING CONFIGURATION	the physical configuration in which a ROBOT starts a MATCH
STARTING LINE	one (1) of two (2) lines in an ALLIANCE STATION, marked by white tape, that extends from the back of the outermost Driver Station Support assembly to the back of the ALLIANCE STATION



Term	Definition
SURROGATE	a team randomly assigned by the FIELD Management System to play an extra Qualification MATCH
TECH FOUL	a credit of ten (10) points toward the opponent's total score
TECHNICIAN	a precollege student member of the DRIVE TEAM who is a resource for ROBOT troubleshooting, setup, and removal from the FIELD
TIMEOUT	a period of up to six (6) minutes between MATCHES which is used to pause Playoff MATCH progression
VENDOR	a legitimate business source for COTS items that satisfies all the criteria listed in the Robot Construction Rules' Overview section.
VRM	a Voltage Regulator Module
WITHHOLDING ALLOWANCE	a static set of FABRICATED ITEMS that shall not exceed 30 lbs. (~13 kg.), brought to an event (or ROBOT Access Period) in addition to the bagged items, to be used to repair and/or upgrade a ROBOT
YELLOW CARD	a warning issued by the Head REFEREE for egregious ROBOT or team member behavior or rule violations. A subsequent YELLOW CARD within the same tournament phase will lead to a RED CARD

